




Connectors > D-Shaped Connectors > D-Sub Receptacle Assembly: Vertical, Shell Size 2, 2.74mm

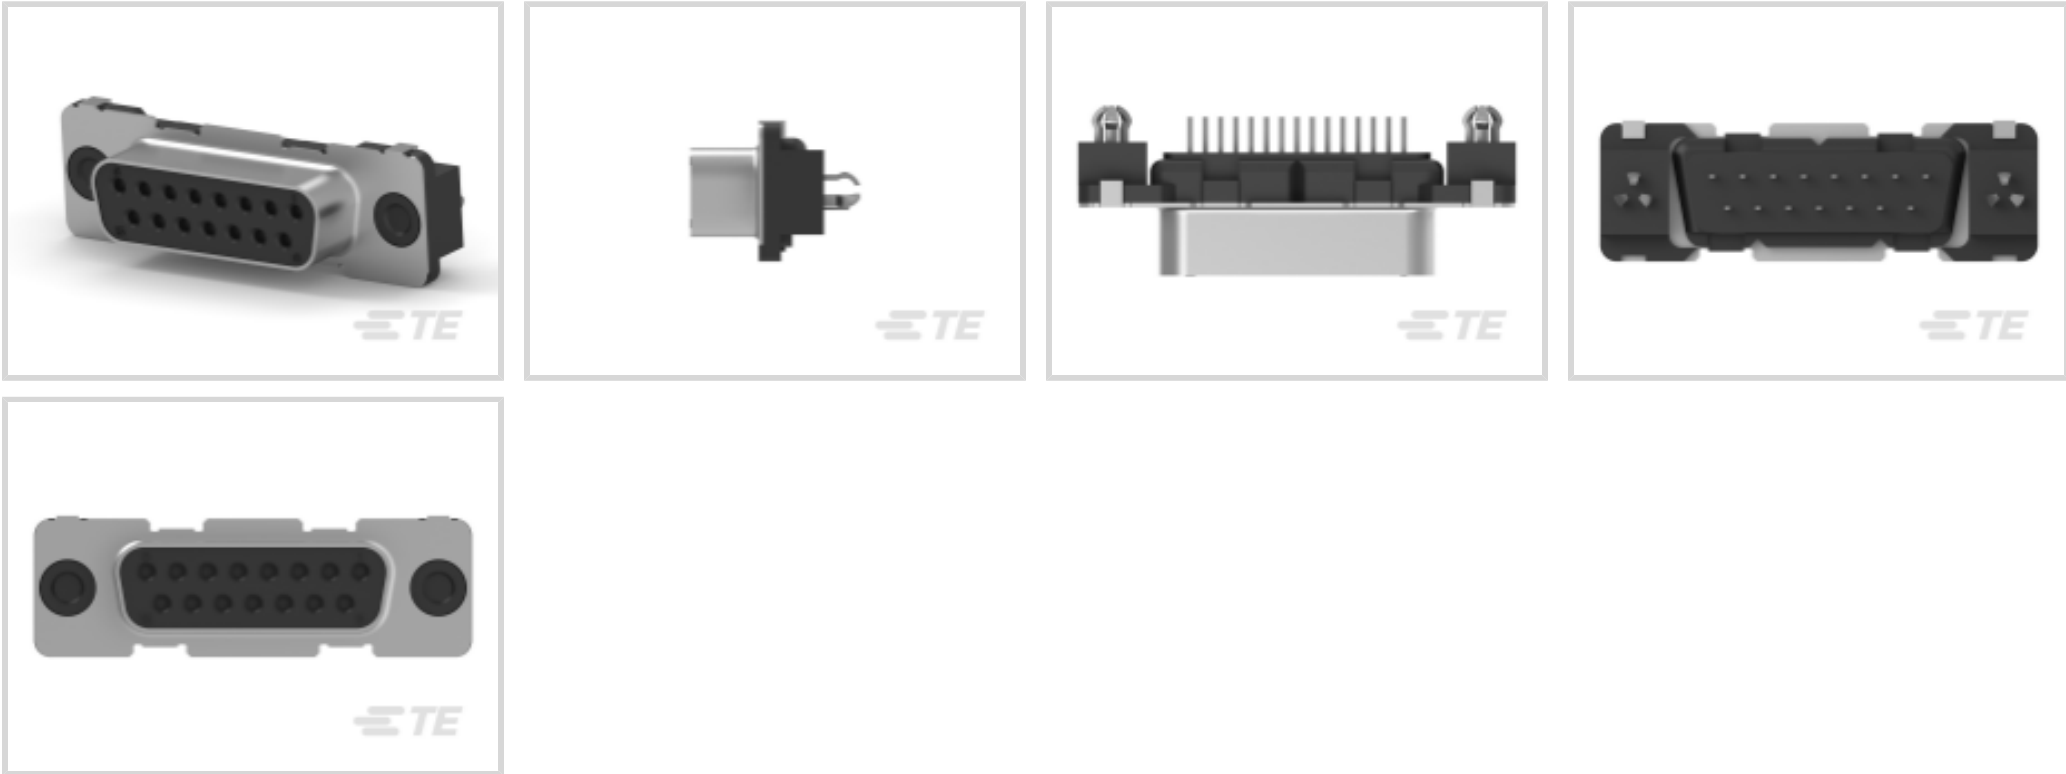

Number of Positions: 15
Connector & Housing Type: Receptacle
Connector System: Cable-to-Board
Connector Mounting Type: Board Mount
Connector Shell Size: 2

[All D-Sub Receptacle Assembly: Vertical, Shell Size 2, 2.74mm \(26\)](#)

Features

Product Type Features

Shell Material Configuration	Front Metal Shell
Connector & Housing Type	Receptacle
Connector System	Cable-to-Board
Connector Shell Size	2
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

PCB Mount Orientation	Vertical
Number of Rows	2
Number of Positions	15

Body Features

Assembly Process Feature Material	Phosphor Bronze
Shell Plating Material	Tin



Primary Product Color	Black
Connector Profile	Standard

Contact Features

Contact Underplating Material	Nickel
	30 µin
Contact Shape & Form	Round
Contact Mating Area Plating Material	Gold (Au)
Contact Base Material	Phosphor Bronze
PCB Contact Termination Area Plating Material	Tin
Contact Current Rating (Max)	6 A
Contact Options	Installed

Termination Features

Rectangular Termination Post & Tail Width	.45 mm[.017 in]
Rectangular Termination Post & Tail Thickness	.32 mm[.012 in]
Termination Method to PCB	Through Hole - Solder
Termination Post & Tail Length	3.2 mm[.126 in]

Mechanical Attachment

Mating Retention Type	Threaded Insert, 4-40 UNC
PCB Mount Retention	Without
Mounting Hole Diameter	5 mm
Mating Retention	With
Assembly Process Feature Plating Material	Tin
Connector Mounting Type	Board Mount

Housing Features

Housing Material	Polyester GF
Shell Material	Tin
Centerline (Pitch)	2.74 mm[.108 in]

Dimensions

Row-to-Row Spacing	2.84 mm[.112 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------



Operation/Application

Durability Rating	200 Cycles
Shielded	No
Circuit Application	Signal

Industry Standards

UL Flammability Rating	UL 94V-0
Compatible With Approved Standards Products	DIN 41652

Packaging Features

Packaging Quantity	45
Packaging Method	Tray

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (.35% in 74025572) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts

TE Part # 1-745494-7
PLUG ASSY,15P,HDE,MS

TE Part # 1-745494-5
15 HDE MS PLUG,22-26,LEAD FREE

TE Part # CAT-AM7-H3
IDC D-Sub: Plug Assembly, Low Profile, Signal, 2.77 mm

Customers Also Bought

TE Part #5747842-4
25 MSFL PLUG RA 318 (IN,FM,BL)

TE Part #6-338313-2
9POS.HD-20 REC.ASSY

TE Part #185226-2
26pos MQS .63 header 180deg

TE Part #2-2176316-7
MELF SMA_A 15K 0.1% 15PPM 0207 1W

TE Part #2246667-2
DUAL BAND PUCK ANTENNA ASSY, 1.13 CABLE

TE Part #2301846-1
AMPL REC HD20, R/A, 15P, B/L,4-40 A /LOCK

TE Part #1676419-2
RN 0805 6K98 0.1% 10PPM 1KRL

TE Part #5-826947-0
MOD2 PIN HEADER 50P

TE Part #9-215083-4
MICRO-MATCH MOW.24P

TE Part #2205482-3
CA MICRO-MATCH MOW-MOW 4POS

Documents

Product Drawings
15POS.HD20 REC.ASSY

English

CAD Files
3D PDF
3D



Customer View Model

[ENG_CVM_CVM_6-338314-2_F_c-6-338314-2-f.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_6-338314-2_F_c-6-338314-2-f.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_6-338314-2_F_c-6-338314-2-f.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.