




Connectors > Contacts > Connector Contacts

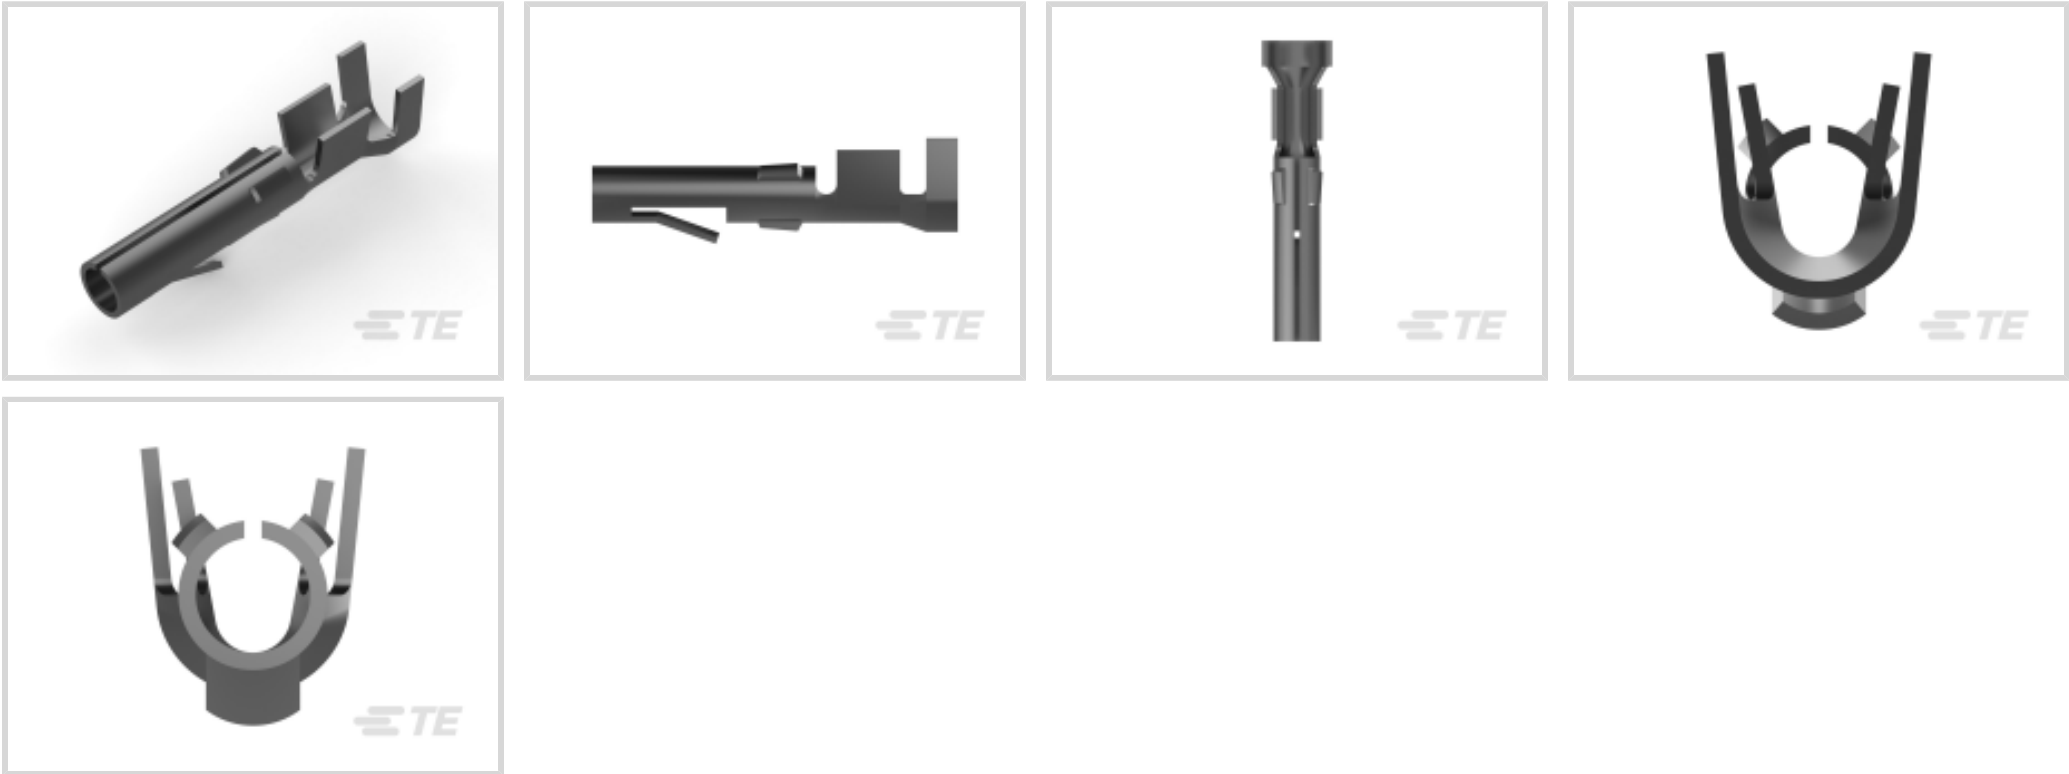

Contact Type: **Socket**

Contact Mating Area Plating Material: **Tin (Sn)**

Wire Contact Termination Area Plating Material: **Tin**

Operating Voltage: **250 VAC**

Contact Retention Within Housing: **With**

Features

Product Type Features

Discrete Wire Type	Stranded
--------------------	----------

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Contact Features

Contact Orientation	Straight
Mating Pin Diameter	2.13 mm[.084 in]
Wire Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Round
Barrel Type	Open
Contact Type	Socket
Contact Mating Area Plating Material	Tin (Sn)
Wire Contact Termination Area Plating Material	Tin
Contact Retention Within Housing	With
Contact Base Material	Phosphor Bronze



Contact Current Rating (Max)	15 A
------------------------------	------

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	Without
Contact Retention Type Within Housing	Locking Lance

Dimensions

Compatible Insulation Diameter Range	3.3 mm[.13 in]
Wire Size	.52 – 2.08 mm²

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Packaging Features

Packaging Quantity	1000
Packaging Method	Bag & Box

Product Compliance

For compliance documentation, visit the product page on TE.com>







EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

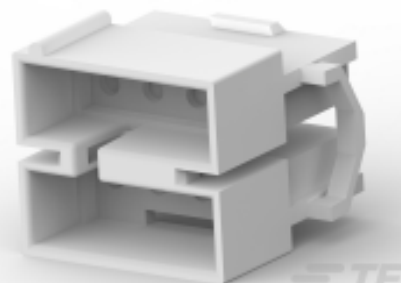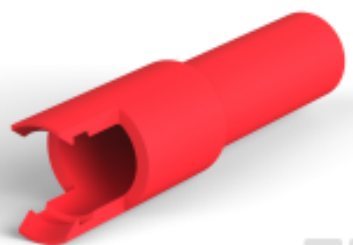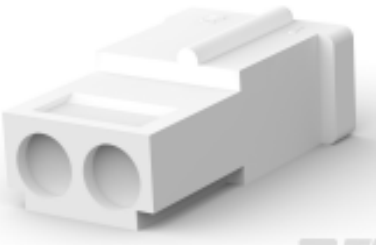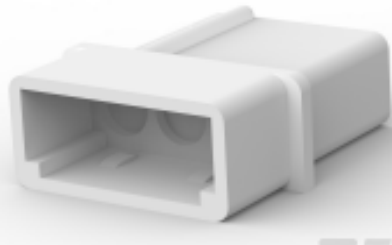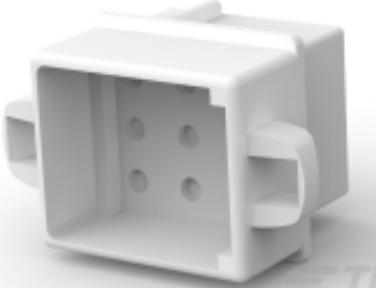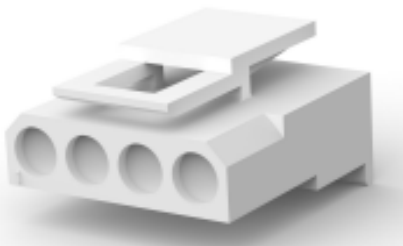 TE Part # 1-480424-0 04P CMNL PLUG HSG F/H NATL	 TE Part # 1-480424-9 04P CMNL PLUG HSG F/H BLK	 TE Part # 1-480439-0 16P CMNL CAP HSG M/M NATL	 TE Part # 1-480284-0 08P CMNL CAP HSG M/M NATL
 TE Part # 1-480350-2 01P CMNL CAP HSG F/H RED	 TE Part # 1-480318-0 02P CMNL PLUG HSG F/H NATL	 TE Part # 1-480401-0 01P CMNL CAP HSG F/H BLK	 TE Part # 1-480305-0 03P CMNL CAP HSG F/H NATL
 TE Part # 1-480350-0 01P CMNL CAP HSG F/H NATL	 TE Part # 1-480277-0 09P CMNL CAP HSG P/M NATL	 TE Part # 1-480285-0 10P CMNL PLUG HSG M/M NATL	 TE Part # 1-480303-0 03P CMNL PLUG HSG F/H NATL
 TE Part # 1-480318-9 02P CMNL PLUG HSG F/H BLK	 TE Part # 1-480323-0 15P CMNL PLUG HSG P/M NATL	 TE Part # 1-480722-0 04P CMNL PLUG HSG W/LCK NATL	 TE Part # 170923-1 CMNL PLG 2P FREE HNG







TE Part # 1-480270-0
06P CMNL PLUG HSG M/M NATL

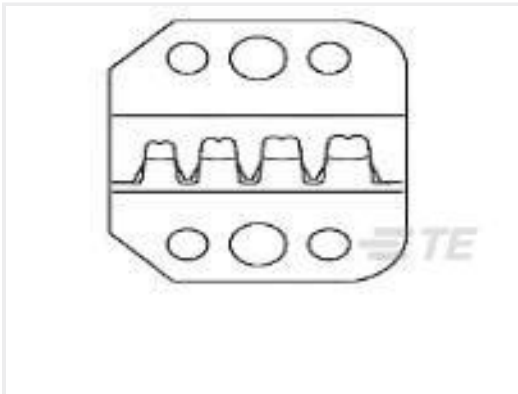

TE Part # 90575-2
SDE UMNL 20-14 AWG DIE

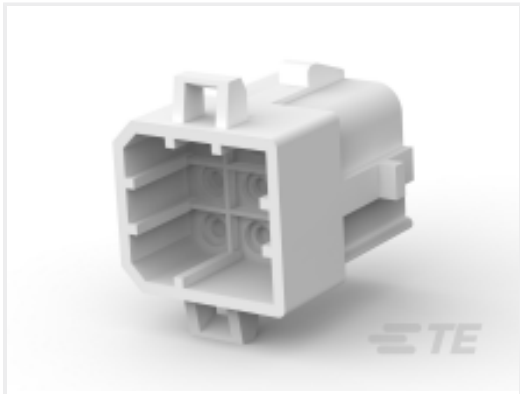

TE Part # 171268-1
CIRCUIT HOUSING CAP

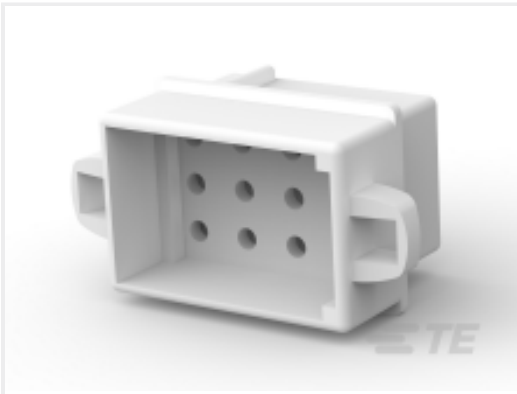

TE Part # 1-480278-0
12P CMNL CAP HSG P/M NATL

Also in the Series | Commercial MATE-N-LOK



Connector Caps & Covers(2)




Connector Contacts(150)



Connector Seals & Cavity Plugs(1)



Insertion & Extraction Tools(3)

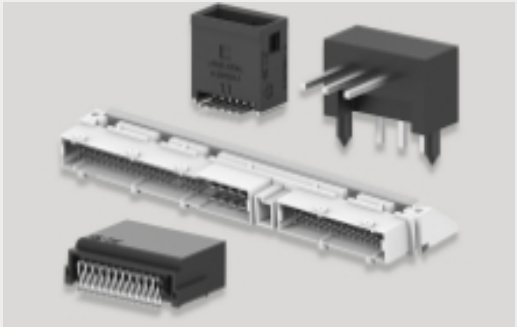

PCB Headers & Receptacles(56)




Power Contacts(146)



Rectangular Power Connectors(182)




Standard Circular Connectors(2)

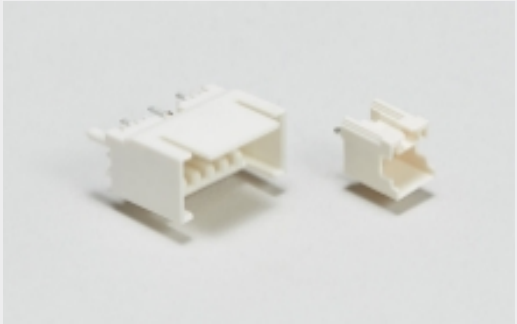


Wire-to-Board Headers & Receptacles (56)

Customers Also Bought

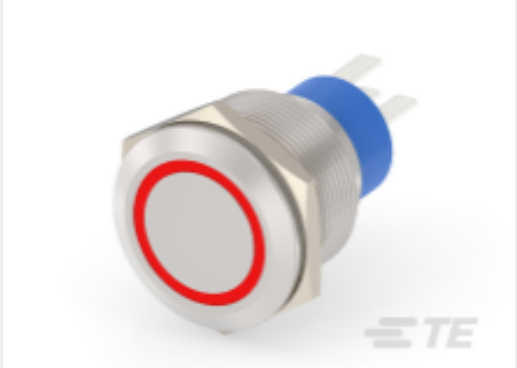

TE Part #2213772-5
AV22 SPM 3A MOVE RING LED RED 12V

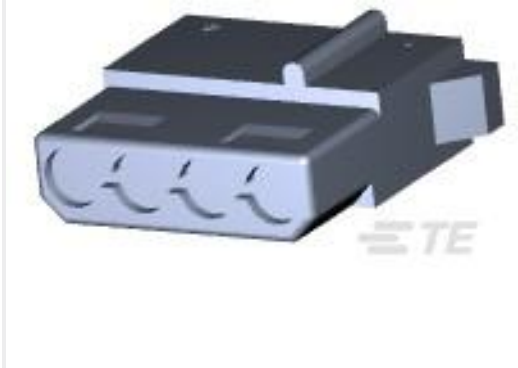

TE Part #1-480424-0
04P CMNL PLUG HSG F/H NATL



TE Part #172332-1
MINI UNIVERSAL MATE-N-LOK CAP HOUSING 9P




TE Part #ZPF000000000104587
DMC-MD 26 B




TE Part #4-5353515-5
ON TAPING (EMBOSS) 0.5MM FS
CONN. TAB AS



TE Part #350219-1
10P CMNL HDR ASSY PC NATL

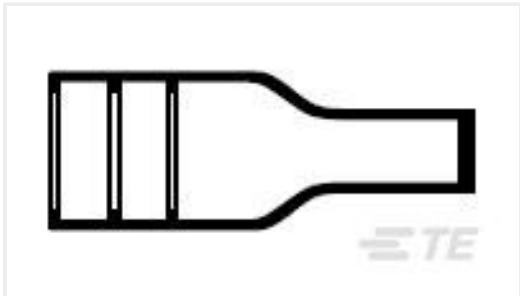


TE Part #808013-000
202D153-3-0

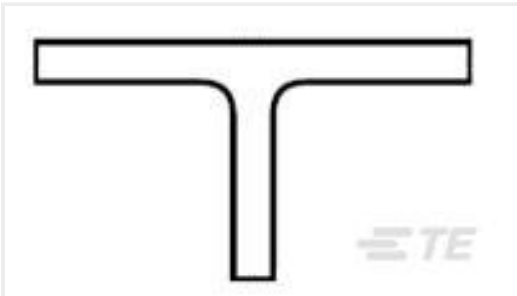

TE Part #579172-000
301A512-51/164-0



TE Part #GA100K6A269I
DISC- - BTC

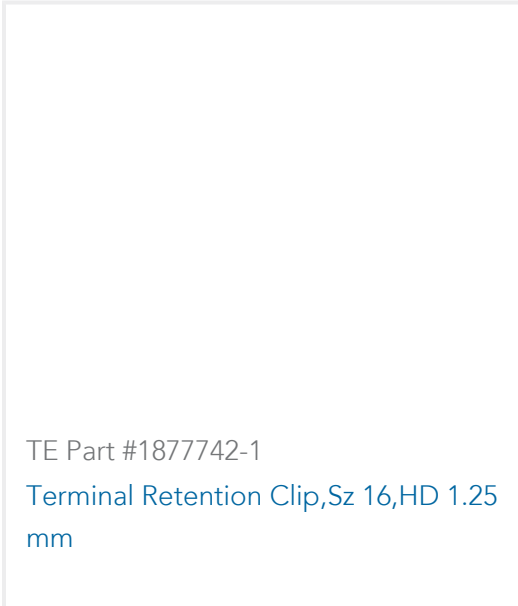

TE Part #1877742-1
Terminal Retention Clip,Sz 16,HD 1.25
mm

Documents

Product Drawings

CMNL SOK PTPPHBZ L/P

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_60619-4_Y.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_60619-4_Y.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_60619-4_Y.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

SOFT_SHELL_PIN_SOCKET_CONNECTORS_STANDARD_DENSITY

English

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

60619-4

Socket Contact, Tin (Sn), 250 VAC, Locking Lance Contact Retention, 20 – 14 AWG, .
52 – 2.08 mm² Wire, Crimp, Phosphor Bronze, Commercial MATE-N-LOK



English