

SHUR-PLUG 180

TE Internal #: 60660-1 Shur-Plug, 4.57 mm [.18 in] Pin Diameter, 18 – 14 AWG, .8 – 2 mm² Wire, 1624 – 4106 CMA, Open Barrel, Tin Plating, SHUR-PLUG 180 View on TE.com >



Terminals & Splices > Crimp Wire Pins, Tabs & Ferrules



Crimp Wire Terminal Type: Shur-Plug

Mating Pin Diameter: 4.57 mm [.18 in]

Compatible Insulation Diameter Range: 4.45 mm, 3.05 – 4.45 mm [.175 in, .12 – .175 in]

Wire Size: .8 – 2 mm²

Features

Product Type Features

Compatible With Discrete Wire Type	Solid, Stranded	
Configuration Features		
Compatible With Wire & Cable Type	Discrete Wire	
Contact Features		
Crimp Wire Terminal Type	Shur-Plug	
Mating Pin Diameter	4.57 mm[.18 in]	
Barrel Type	Open	
Terminal Plating Material	Tin	
Terminal Orientation	Straight	
Mechanical Attachment		
Wire Insulation Support	With	
Dimensions		
Compatible Insulation Diameter Range	4.45 mm, 3.05 – 4.45 mm[.175 in][.12 – .175 in]	
Wire Size	1624 – 4106 CMA	

60660-1

Shur-Plug, 4.57 mm [.18 in] Pin Diameter, 18 – 14 AWG, .8 – 2 mm² Wire, 1624 – 4106 CMA, Open Barrel, Tin Plating, SHUR-PLUG 180



Barrel Inside Diameter	1.65 mm, 3.68 mm[.065 in][.145 in]
Terminal Material Thickness	.45 mm[.018 in]
Overall Product Length	18.92 mm[.745 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
Packaging Features	
Packaging Quantity	12000
Packaging Method	Reel
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 202

(247) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Halogen Content

Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


60660-1

Shur-Plug, 4.57 mm [.18 in] Pin Diameter, 18 – 14 AWG, .8 – 2 mm² Wire, 1624 – 4106 CMA, Open Barrel, Tin Plating, SHUR-PLUG 180



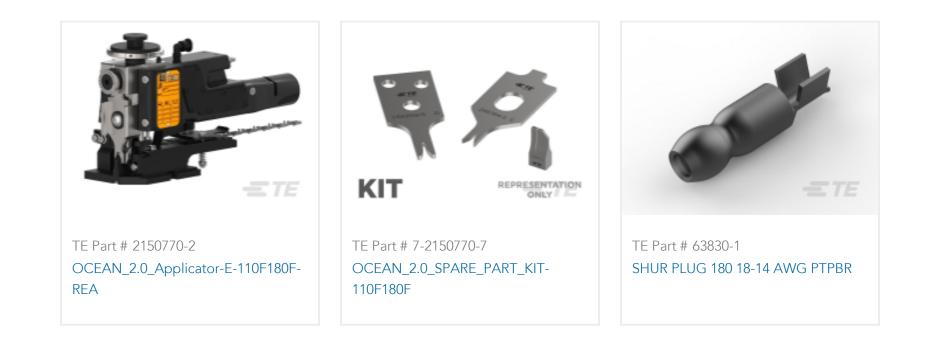


Also in the Series | SHUR-PLUG 180

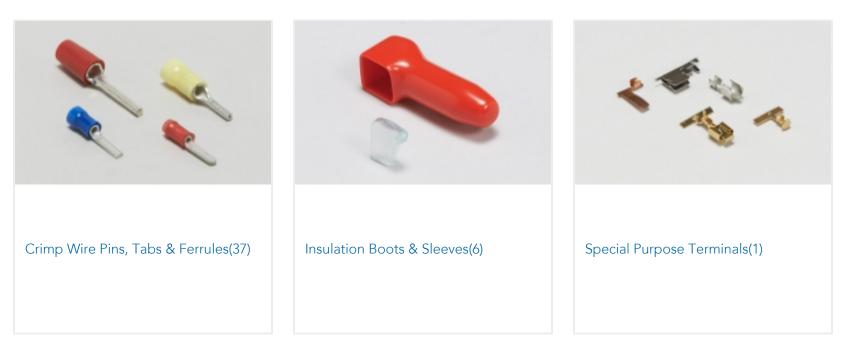


Customers Also Bought



TE Part #170823-3 250 FASTON SLEEVE,REC., TRANSPARENT	TE Part #42868-2 SHUR PLUG 180 RECEPTACLE 14-10 AWG TPBR	TE Part #640418-2 BLADE REC 250 18-14AWG TPBR	TE Part #60799-5 SHUR PLUG 180 RECEPTACLE 18-14 AWG TPBR

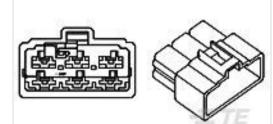







TE Part #178025-1 FF 250 CAP HSG DBL 6P NAT

TE Part #485030-1 RING 18-14 AWG TPBR TE Part #647845-4 SERIES 50 HOUSING,GRAY TE Part #42510-2 250 FASTON REC 22-18 AWG TPBR



60660-1

Shur-Plug, 4.57 mm [.18 in] Pin Diameter, 18 – 14 AWG, .8 – 2 mm² Wire, 1624 – 4106 CMA, Open Barrel, Tin Plating, SHUR-PLUG 180



Documents

Product Drawings SHUR PLUG 180 18-14 AWG TPBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_60660-1_AF.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_60660-1_AF.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_60660-1_AF.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications Application Specification

English