



Terminals & Splices > PCB Terminals



PCB Terminal Type: **Receptacle**  
PCB Hole Diameter: **4.5 mm [ .125 in ]**  
Mating Pin Diameter: **1.47 mm [ .058 in ]**  
Compatible Insulation Diameter (Max): **1.65 mm [ .065 in ]**  
Compatible Insulation Diameter Range: **.89 – 1.65 mm [ .035 – .065 in ]**

Features

Product Type Features

|                   |           |
|-------------------|-----------|
| Terminal Features | Stud Hole |
|-------------------|-----------|

Contact Features

|                           |                  |
|---------------------------|------------------|
| PCB Terminal Type         | Receptacle       |
| Mating Pin Diameter       | 1.47 mm[.058 in] |
| Terminal Plating Material | Pre-Tin          |
| Terminal Orientation      | Straight         |

Termination Features

|                           |                       |
|---------------------------|-----------------------|
| Termination Method to PCB | Through Hole - Solder |
| Product Terminates To     | Wire & Cable          |

Mechanical Attachment

|                         |      |
|-------------------------|------|
| Wire Insulation Support | With |
|-------------------------|------|

Dimensions

|                             |                 |
|-----------------------------|-----------------|
| Terminal Material Thickness | .25 mm[.01 in]  |
| PCB Hole Diameter           | 4.5 mm[.125 in] |



|                                      |                               |
|--------------------------------------|-------------------------------|
| Compatible Insulation Diameter (Max) | 1.65 mm[.065 in]              |
| Compatible Insulation Diameter Range | .89 – 1.65 mm[.035 – .065 in] |
| Wire Size                            | .12 – .4 mm <sup>2</sup>      |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Insulation Option           | Uninsulated                |
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |

Packaging Features

|                    |       |
|--------------------|-------|
| Packaging Quantity | 15000 |
| Packaging Method   | Reel  |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                               |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                     |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                     |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                       |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2025 (247)<br>Candidate List Declared Against: JAN 2025 (247)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                           |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                  |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 60804-1  
[.058 DIA RECPT AU/NI/PHBZ](#)



TE Part # 61513-2  
[058 PC PIN REC 010PTPHBZ](#)



TE Part # 350015-1  
[093 PIN REC 22-18 0125PTPHBZ](#)



TE Part # 7-2837608-7  
[OCEAN\\_2.0\\_SPARE\\_PART\\_KIT-055F070O](#)



TE Part # 350189-1  
[.058 DIA RECPT PC R/A LP 26-22](#)



TE Part # 350393-1  
[058 PCB REC IP 010PTPHBZ](#)



TE Part # 2837608-2  
[OCEAN-2.0-APPLICATOR-S-055F070O-RSA](#)



TE Part # 2837608-1  
[OCEAN-2.0-APPLICATOR-S-055F070O-RSM](#)




TE Part # 60940-1  
[.058 PIN REC 24-20 010PTPHBZ](#)

Customers Also Bought



TE Part #3-1734506-8  
[RCPT, 2.0MM, 30P,VRT MT, 8 Au", 2.6 ST](#)

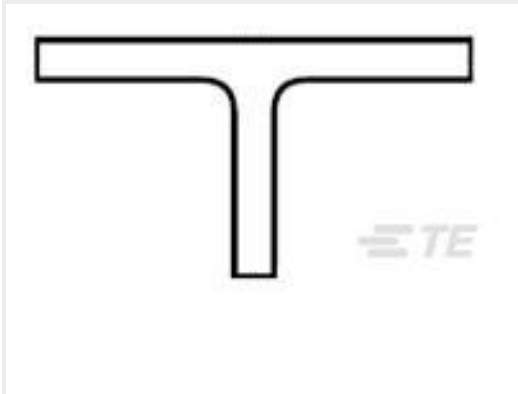

TE Part #819101-000  
[301A512-51-0](#)



TE Part #4-640426-2  
[12P MTA156 CONN ASSY 18AWG ORA](#)




TE Part #5-1393144-1  
[K10P-11DT5-24=K10/K20](#)




TE Part #CB7840-000  
[RW-200-5/8-0-SP](#)



TE Part #640582-1  
[08P UMNL PLUG HSG](#)

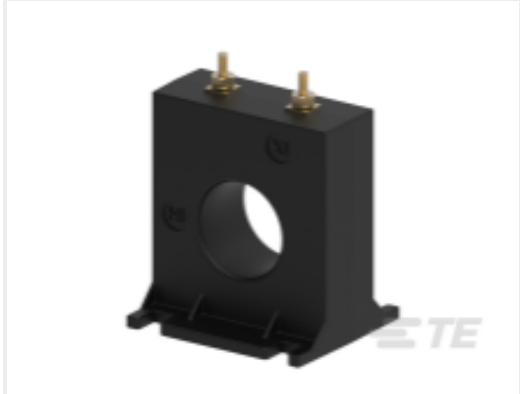


TE Part #CG3629-000  
[CI-2SFT151](#)

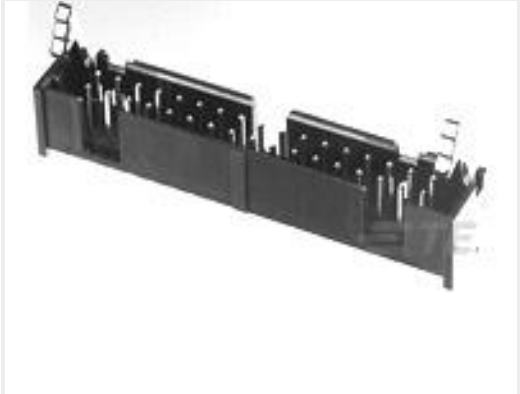

TE Part #104128-1  
[010 LOPRO HDR SP 30DP LATCH](#)



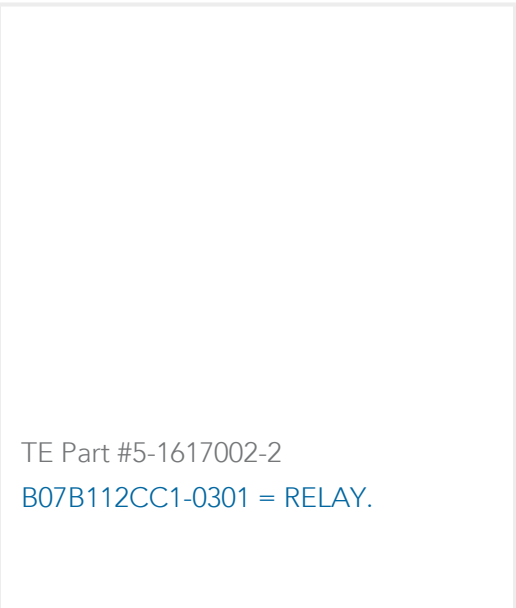

Documents

Product Drawings

058 PIN REC 26-22 .010PTPPHBZ

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_60888-1\_AJ\_c-60888-1-aj.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_60888-1\_AJ\_c-60888-1-aj.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_60888-1\_AJ\_c-60888-1-aj.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

PRINTED CIRCUIT BOARD TERMINALS AND DISCONNECTS

English

Product Specifications

Application Specification

English