

TE Internal #: 6116151-1
2 x 1 Combo Jack, Single Port, RJ45 over Dual USB, Low Profile,
Combo Jacks, Jack, Shielded, Inverted - Latch Up, PCB Ground,
Cat 5, Cable-to-Board
[View on TE.com >](#)



Connectors > Modular Jacks & Plugs > Combo Jacks



Port Matrix Configuration: **2 x 1**
Port Configuration: **Single Port**
Modular Jack & Plug Interface Type: **RJ45 over Dual USB**
Connector Profile: **Low**
Modular Jacks & Plugs Products: **Combo Jacks**

Features

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board
Connectors & Connector Components Type	Connector
Modular Jack & Plug Interface Type	RJ45 over Dual USB
Modular Jacks & Plugs Products	Combo Jacks
Modular Connector Style	Jack
Grounding Options	PCB Ground
Connector System	Cable-to-Board

Configuration Features

PCB Mount Orientation	Right Angle
Number of PCB Ground Tabs	4
Multiple Port Configuration	Stacked
Port Matrix Configuration	2 x 1
Port Configuration	Single Port
Connector Contact Density	Standard
Number of Positions	4, 8
Number of Loaded Positions	4, 8

Body Features

Connector Profile	Low
Modular Jack Latch Orientation	Inverted - Latch Up



Shield Material	Copper Zinc Alloy
-----------------	-------------------

Shield Plating Material	Tin over Copper
-------------------------	-----------------

Contact Features

Contact Underplating Material	Nickel
-------------------------------	--------

Contact Base Material	Phosphor Bronze
-----------------------	-----------------

Contact Current Rating (Max)	1.5 A
------------------------------	-------

PCB Contact Termination Area Plating Material	Tin
---	-----

Termination Features

Termination Method to PCB	Through Hole - Solder
---------------------------	-----------------------

Mechanical Attachment

Connector Mounting Type	Board Mount
-------------------------	-------------

Housing Features

Housing Color	Black
---------------	-------

Housing Material	High Temperature Nylon
------------------	------------------------

Centerline (Pitch)	1.02 mm, 2 mm, 2.5 mm[.04 in][.07 in][.09 in]
--------------------	---

Dimensions

PCB Thickness (Recommended)	1.57 mm[.062 in]
-----------------------------	------------------

1.135 in

Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Indicator Type	No Indicator
----------------	--------------

Circuit Application	Signal
---------------------	--------

Shielded	Yes
----------	-----

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Performance Category	Cat 5
----------------------	-------

Packaging Features

Packaging Quantity	36
--------------------	----

Packaging Method	Box
------------------	-----



Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

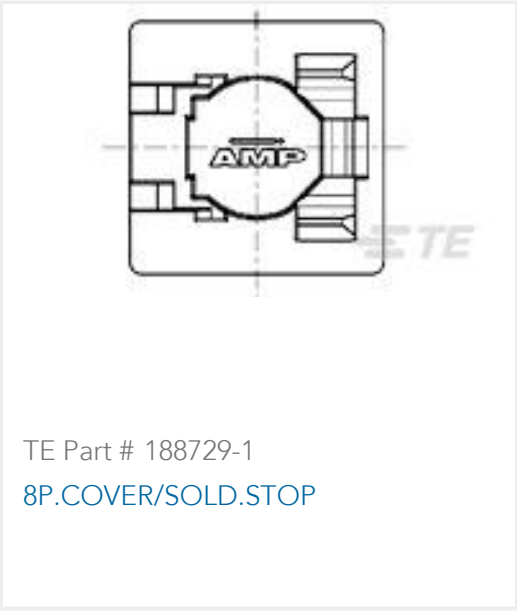


Customers Also Bought



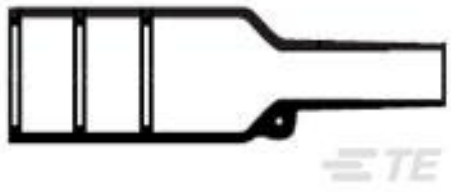

TE Part #481350-000
202K132-25/225-0

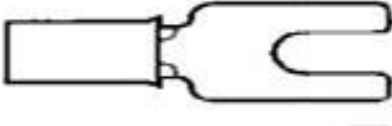

TE Part #165012
PLASTI-GRIP, SPADE 16-14 8



TE Part #130517
PIDG 22-16 SPADE M4



TE Part #3-641239-8
08P MTA100 CONN ASSY BLU LF



TE Part #4-641126-2
12P MTA100 HDR ASY FL/STR LF



TE Part #5646956-1
UPM EXPANDED PIN ASSEMBLY




TE Part #5227161-7
RTANG JACK W/MTG PINS, BNC PCB



TE Part #3-640427-2
02P MTA156 CONN ASSY 20AWG YEL



TE Part #5223986-5
UPM KEYED GUIDE MODULE



TE Part #5-146252-5
10 MODII HDR DRST B/A .100 LF

Documents

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_6116151-1_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_6116151-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_6116151-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

82066 Modular Jacks and MRJ21 Product catalog - Stacked Modular Jacks section

English

Product Specifications



Application Specification

English

Agency Approvals

CSA Certificate

English