



SPLICE

TE Internal #: 61299-3
Pigtail Splice / Thru Splice, Serrated, 7000 – 12000 CMA, Brass, 3
Serration, 6.8 mm [.267 in] Length, Reel, Open Barrel, SPLICE
[View on TE.com >](#)

Terminals & Splices > Splices



Splice Type: **Pigtail Splice, Thru Splice**
Sealable: **No**
Splice Features: **Serrated**
Wire Size: **7000 – 12000 CMA**
Contact Base Material: **Brass**

Features

Product Type Features

Splice Type	Pigtail Splice, Thru Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Non-Insulation Support

Configuration Features

Number of Serrations	3
Compatible With Wire & Cable Type	Discrete Wire

Body Features

Product Weight	.625 g[.022 oz]
Splice Features	Serrated

Contact Features

Contact Base Material	Brass
Barrel Type	Open

Mechanical Attachment



Wire Insulation Support	Without
-------------------------	---------

Dimensions

Wire Size	7000 – 12000 CMA
Terminal Material Thickness	.78 mm[.031 in]
Product Length	6.8 mm[.267 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Operation/Application

Compatible With Wire Base Material	Copper
------------------------------------	--------

Industry Standards

Government Qualified Splice	No
-----------------------------	----

Packaging Features

Packaging Quantity	3500
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part



numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 2837449-2
OCEAN_2.0_Applicator-S-180F-RSA

TE Part # 2837449-1
OCEAN_2.0_Applicator-S-180F-RSM

TE Part # 62516-2
SPLICE IS 1600-4100 .0126 BR

TE Part # 7-2837449-7
OCEAN_2.0_SPARE_PART_KIT-180F

TE Part # 63414-1
SPLICE 9000-16000 .031 TPST

TE Part # 60806-1
SPLICE IS 1600-4100 .0126 BR

Also in the Series | SPLICE

Crimp Wire Pins, Tabs & Ferrules(1)

Splices(63)


Customers Also Bought

TE Part #1217824-1
TERM,POKE-IN,MAG-MATE

TE Part #2-32949-1
PG R 22-16 COMM 22-18 MIL 10

TE Part #63816-1
TAB, MAG-MATE 250F TPBR

TE Part #63464-3
MAG-MATE 250 F-TAB TPBR

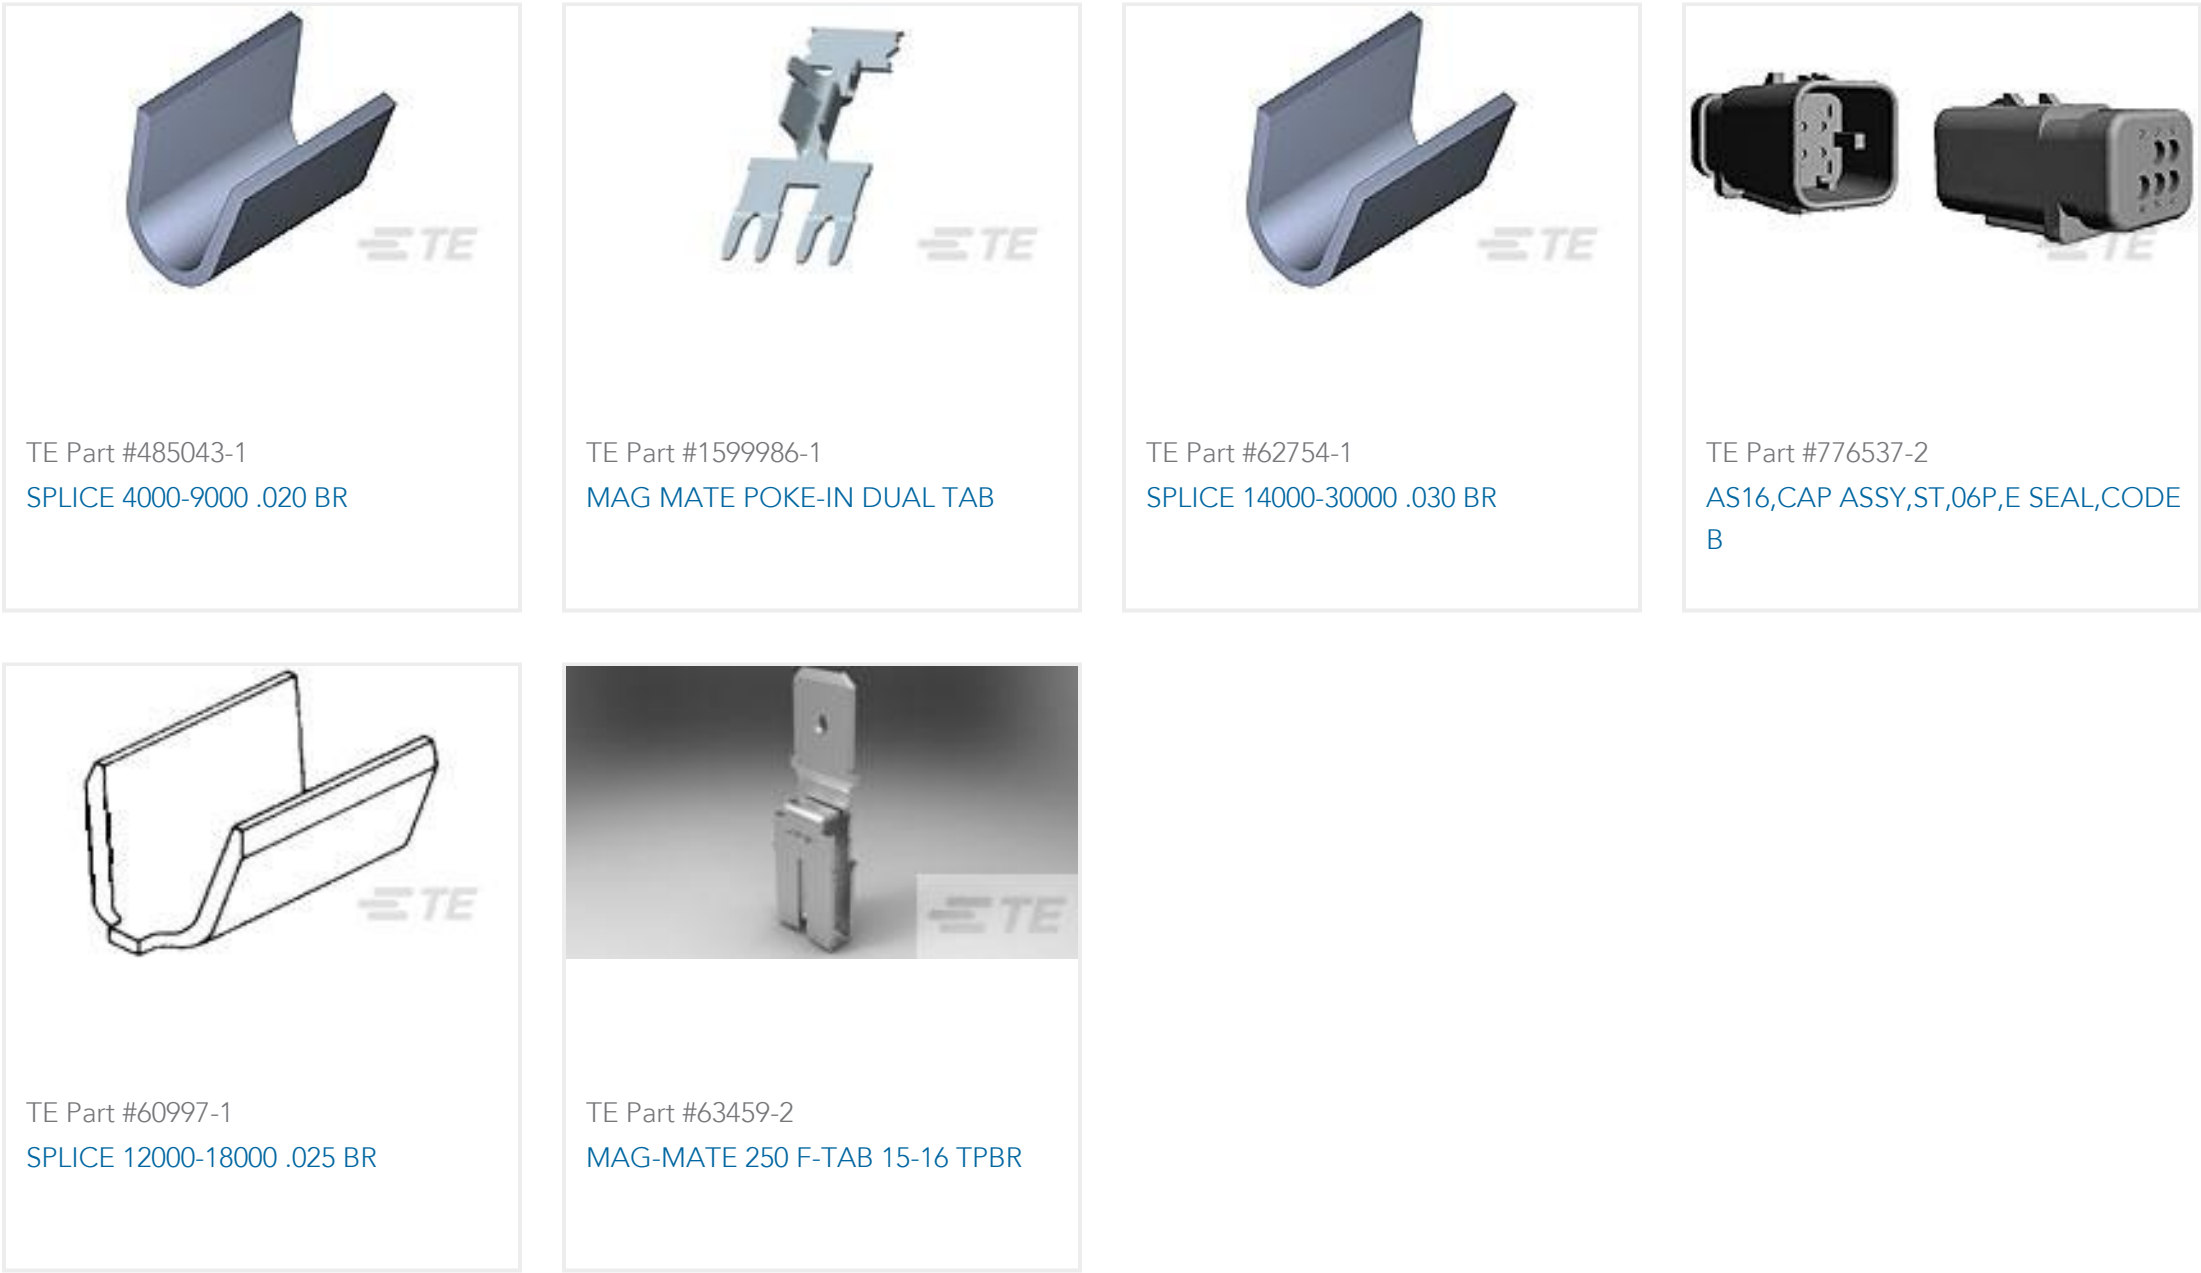

Documents

Product Drawings
SPLICE 7000-12500 .031 BR

English

CAD Files
3D PDF

3D

Customer View Model
ENG_CVM_CVM_61299-3_AF_c-61299-3-af.2d_dxf.zip

English

Customer View Model
ENG_CVM_CVM_61299-3_AF_c-61299-3-af.3d_igs.zip

English

Customer View Model
ENG_CVM_CVM_61299-3_AF_c-61299-3-af.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications
Application Specification

English

Agency Approvals
UL Report

English