



Terminals & Splices > Crimp Wire Pins, Tabs & Ferrules



Crimp Wire Terminal Type: **Shur-Plug**
Mating Pin Diameter: **4.57 mm [.18 in]**
Compatible Insulation Diameter Range: **4.45 mm, 3.05 – 4.45 mm [.175 in, .12 – .175 in]**
Wire Size: **.8 – 2 mm²**

Features

Product Type Features

Compatible With Discrete Wire Type	Solid, Stranded
------------------------------------	-----------------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Contact Features

Crimp Wire Terminal Type	Shur-Plug
Mating Pin Diameter	4.57 mm[.18 in]
Barrel Type	Open
Terminal Plating Material	Tin
Terminal Orientation	Straight

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions

Compatible Insulation Diameter Range	4.45 mm, 3.05 – 4.45 mm[.175 in][.12 – .175 in]
Wire Size	1624 – 4106 CMA



Barrel Inside Diameter	1.65 mm, 3.68 mm[.065 in][.145 in]
Terminal Material Thickness	.39 mm[.016 in]
Overall Product Length	19.93 mm[.785 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]

Packaging Features

Packaging Quantity	10000
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2150805-2
[OCEAN_2.0_Applicator-E-100F180F-REA](#)




KIT
TE Part # 7-2150805-7
[OCEAN_2.0_SPARE_PART_KIT-100F180F](#)



TE Part # 63830-1
[SHUR PLUG 180 18-14 AWG PTPBR](#)



TE Part # 1217074-2
[SHUR PLUG,180,REC.,2 X 8 AWG,TPBR](#)



TE Part # 62757-1
[225 DIA PIN 18-14 016BR](#)

Also in the Series | **SHUR-PLUG 180**



[Crimp Wire Pins, Tabs & Ferrules\(37\)](#)




[Insulation Boots & Sleeves\(6\)](#)



[Special Purpose Terminals\(1\)](#)


Customers Also Bought

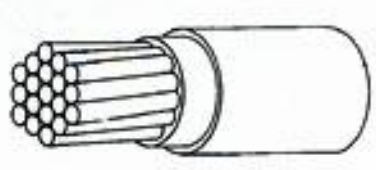


TE Part #802036-000
[22759/34-16-0](#)




TE Part #170823-3
[250 FASTON SLEEVE,REC., TRANSPARENT](#)




TE Part #647877-1
[SERIES 50 & 75 CONTACT,6 AWG](#)

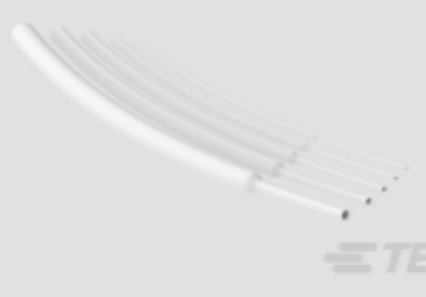

TE Part #NB13434001
[RNF-100-3/4-WH-FSP](#)

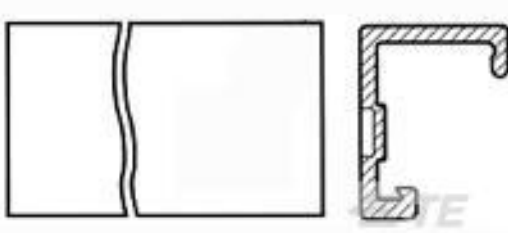

TE Part #1-640551-0
[10P MTA156 COVER](#)

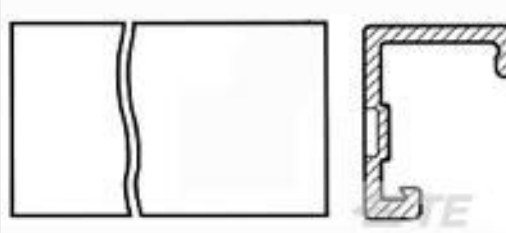

TE Part #1-640551-5
[15P MTA156 COVER](#)



TE Part #647845-4
[SERIES 50 HOUSING,GRAY](#)



TE Part #42510-2
[250 FASTON REC 22-18 AWG TPBR](#)



Documents

Product Drawings

SHUR PLUG 180 RECEPTACLE 18-14 AWG TPBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_61412-2_F1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_61412-2_F1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_61412-2_F1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English