
61436-2 - ACTIVE

TE Internal #: 61436-2 Closed Ring Tongue Terminal, 22 – 16 AWG, #8 / M4 Stud, 4.5 mm [.177 in] Stud Diameter, Open Barrel, Straight, Tin Plating, Uninsulated

View on TE.com >

Terminals & Splices > Ring Terminals

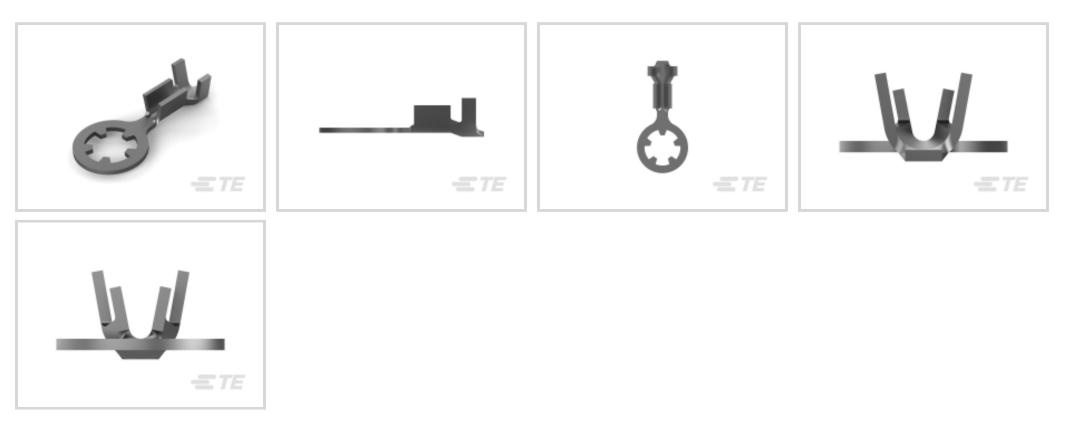

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 642 – 2582 CMA

Stud Size: **#8, M4**

Features

Product Type Features

Shape Description

Anti-Rotational/Grounding



Ring Terminal Product Type	Closed Ring Tongue Terminal	
Stud Size	#8, M4	
Sealable	No	
Compatible With Discrete Wire Type	Stranded	
Wire Insulation Support Retention Type	Insulation Support	
Configuration Features		
Number of Holes	1	
Contact Features		
Contact Base Material	Brass	
Barrel Type	Open	
Terminal Orientation	Straight	
Terminal Plating Material	Tin	
Contact Underplating Material	None	
Mechanical Attachment		
Wire Insulation Support	With	

61436-2

Closed Ring Tongue Terminal, 22 – 16 AWG, #8 / M4 Stud, 4.5 mm [.177 in] Stud Diameter, Open Barrel, Straight, Tin Plating, Uninsulated



Dimensions

	.1 in
Wire Size	642 – 2582 CMA
Stud Diameter	4.5 mm[.177 in]
Tongue Thickness	1.02 mm[.04 in]
Product Length	19.56 mm[.77 in]
Barrel Inside Diameter	1.27 mm, 3.17 mm[.05 in][.125 in]
Compatible Insulation Diameter (Max)	3.56 mm[.14 in]
Compatible Insulation Diameter Range	2.54 – 3.56 mm[.1 – .14 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]
Operation/Application	
Compatible With Wire Base Material	Copper
Industry Standards	
Government Qualified Terminal	No
Packaging Features	

Pacl	kaging	Quantity
	0 0	,

Packaging Method

Strip/Reel

7000

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

C For support call+1 800 522 6752

04/14/2025 04:14PM | Page 2

61436-2

Closed Ring Tongue Terminal, 22 – 16 AWG, #8 / M4 Stud, 4.5 mm [.177 in] Stud Diameter, Open Barrel, Straight, Tin Plating, Uninsulated




Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Customers Also Bought

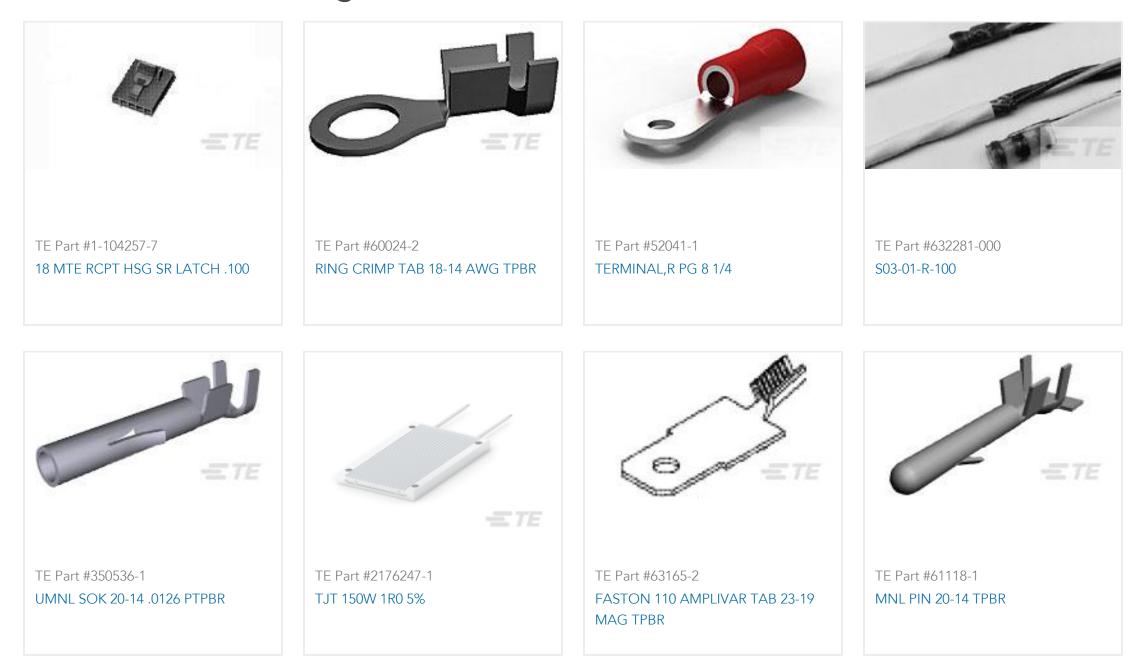

61436-2

Closed Ring Tongue Terminal, 22 – 16 AWG, #8 / M4 Stud, 4.5 mm [.177 in] Stud Diameter, Open Barrel, Straight, Tin Plating, Uninsulated





Documents

Product Drawings RING 22-16 AWG TPBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_61436-2_P_c-61436-2-p.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_61436-2_P_c-61436-2-p.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_61436-2_P_c-61436-2-p.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications Engineering Report

English

Agency Approvals

UL Report

English