




Terminals & Splices > Quick Disconnects

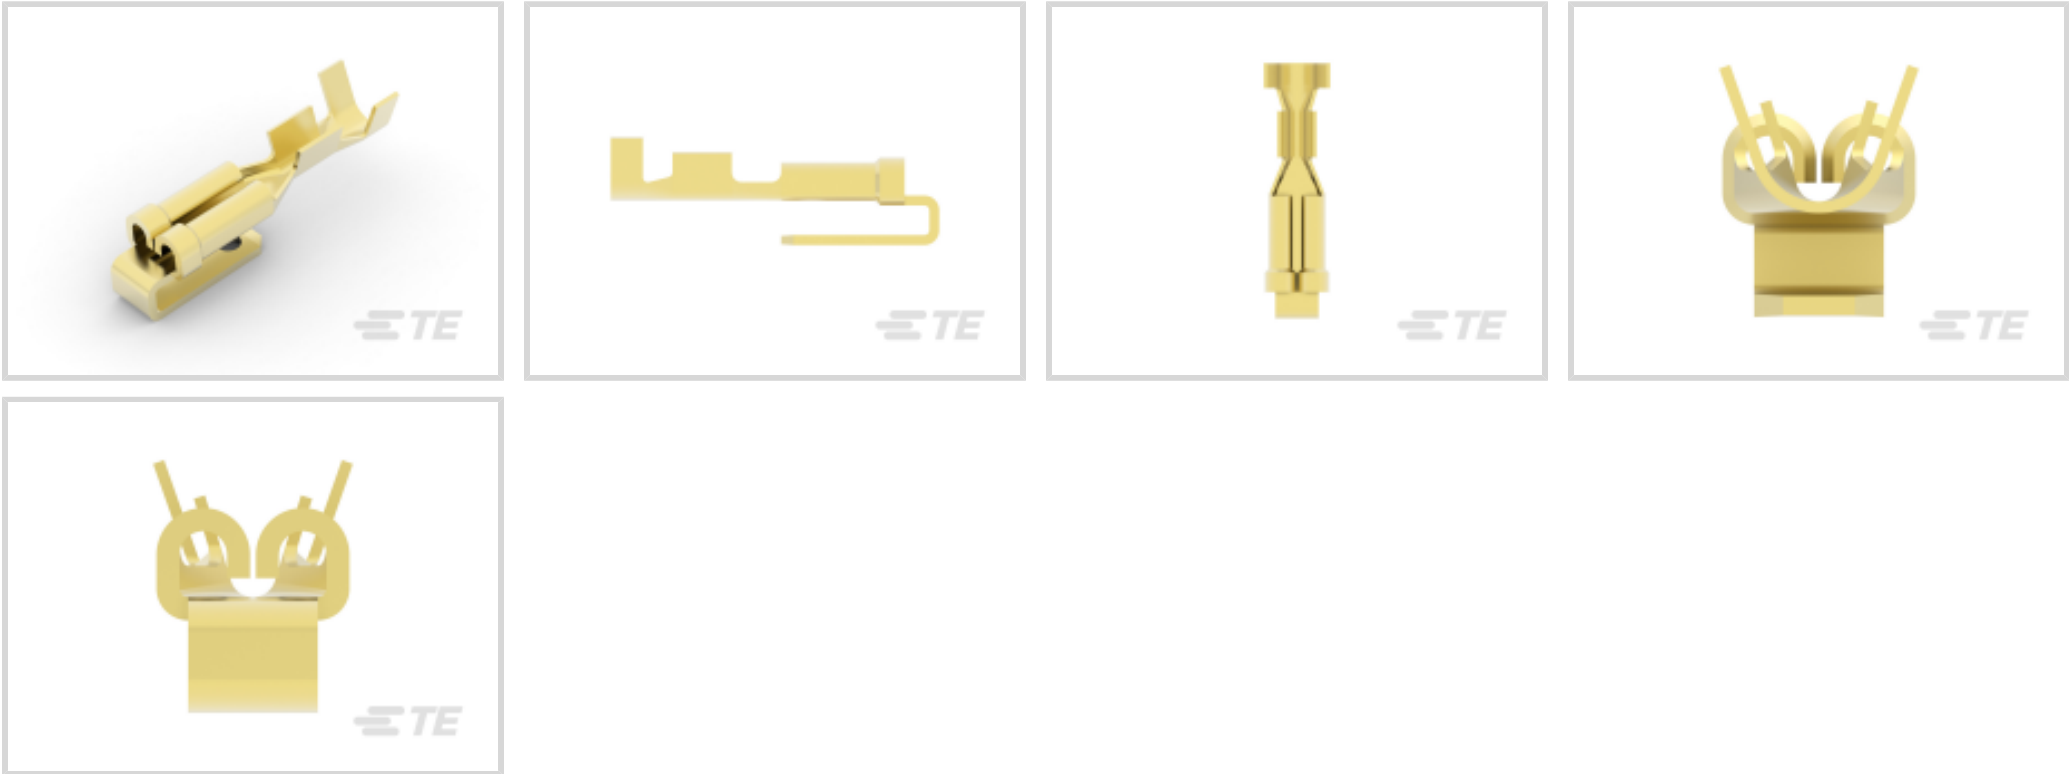

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.32 – .82 mm²**

Mating Tab Width: **2.8 mm [.11 in]**

Mating Tab Thickness: **.51 mm [.02 in]**

Features

Product Type Features

|                 |        |
|-----------------|--------|
| Insertion Force | Normal |
|-----------------|--------|

Configuration Features

|                                   |               |
|-----------------------------------|---------------|
| Compatible With Wire & Cable Type | Discrete Wire |
| Connection Capacity               | Single        |

Contact Features

|                                |                |
|--------------------------------|----------------|
| Quick Disconnect Terminal Type | Receptacle     |
| Mating Tab Width               | 2.8 mm[.11 in] |
| Mating Tab Thickness           | .51 mm[.02 in] |
| Terminal Orientation           | Straight       |
| Contact Base Material          | Brass          |
| Terminal Plating Material      | Unplated       |
| Crimp Type                     | F-Crimp        |
| Barrel Type                    | Open           |

Termination Features

|  |  |
|--|--|
|  |  |
|--|--|



|                       |              |
|-----------------------|--------------|
| Product Terminates To | Wire & Cable |
|-----------------------|--------------|

Mechanical Attachment

|                         |        |
|-------------------------|--------|
| Wire Insulation Support | With   |
| Mating Retention Type   | Dimple |

Dimensions

|                                      |                             |
|--------------------------------------|-----------------------------|
| Product Length                       | 15.24 mm[.6 in]             |
| Compatible Insulation Diameter Range | 1.52 – 2.54 mm[.06 – .1 in] |
| Terminal Material Thickness          | .25 mm[.01 in]              |
| Wire Size                            | .32 – .82 mm <sup>2</sup>   |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Insulation Option           | Uninsulated                |
| Operating Temperature Range | -40 – 110 °C[-40 – 230 °F] |

Industry Standards

|                                           |         |
|-------------------------------------------|---------|
| Compatible With Agency/Standards Products | CSA, UL |
|-------------------------------------------|---------|

Packaging Features

|                    |            |
|--------------------|------------|
| Packaging Quantity | 4000       |
| Packaging Method   | Strip/Reel |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                               |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                     |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                     |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                       |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2025 (247)<br>Candidate List Declared Against: JAN 2025 (247)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                           |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                  |

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 2266546-2  
OCEAN-2.0-APPLICATOR-S-070F140OA

TE Part # 2305570-1  
Strip Terminal Cutter-Side Feed-No Crimp

TE Part # 2266546-1  
OCEAN-2.0-APPLICATOR-S-070F140O-RSM

TE Part # 7-2266546-7  
OCEAN\_2.0\_SPARE\_PART\_KIT-070F140O

Also in the Series | FASTON 110

Crimp Terminal Housings(13)

Insertion & Extraction Tools(1)

PCB Terminals(22)

Quick Disconnects(164)

Customers Also Bought


TE Part #6-87756-8  
MOD IV RECP LP

TE Part #5-1393243-9  
RT424005

TE Part #62003-2  
110 FASTON REC 22-18 AWG TPBR

TE Part #60118-1  
110 FASTON REC 22-18 AWG TPBR



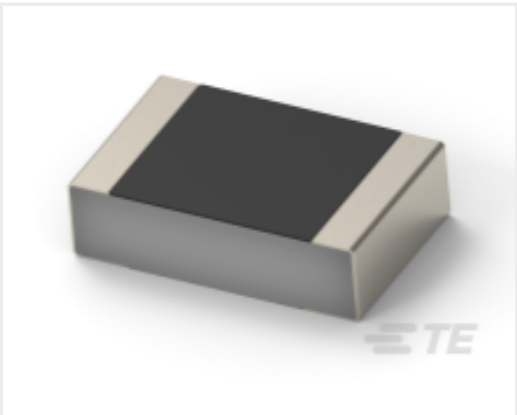

TE Part #5-2176452-0  
CPF 0201 1K74 0.1% 25ppm 1K RL




TE Part #1217083-1  
110 FASTON,PIGGYBACK REC,22-18 AWG,BR



TE Part #2-1761465-1  
PCI Express RA assy 5.8mm slot 2.3 mm pc



TE Part #320553  
PIDG R 22-16 COMM 22-18 MIL 4 mm pc

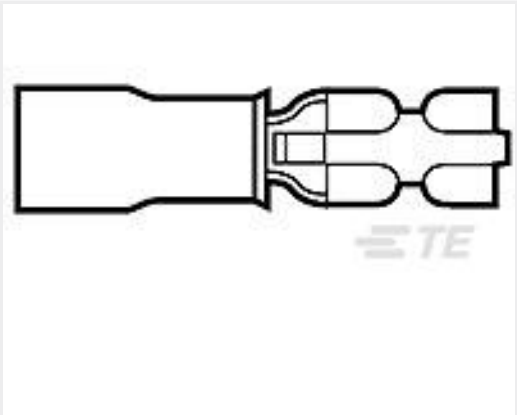

TE Part #640927-1  
RECEPT,PIDG FASTON 16-14 110



TE Part #1478885-4  
PG EMC GLAND PG13.5

Documents

Product Drawings

110 FASTON REC 22-16 AWG BR

English

CAD Files

Customer View Model

ENG\_CVM\_CVM\_62003-1\_AD.2d\_dxf.zip

English

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_62003-1\_AD.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_62003-1\_AD.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

82004 FASTON Terminals (Insulated and Uninsulated) Catalog - FASTON Receptacles Section

English

1654742\_HOUSEHOLD\_APPLIANCES\_RAST5

English

Product Specifications

Application Specification

English



[Agency Approvals](#)

[UL Report](#)

English