

### MAG-MATE

TE Internal #: 62935-3 Poke-In, 24 – 22 AWG Aluminum Wire, .51 – .64 mm Aluminum Wire, 20 – 18 AWG Lead Wire, .5 – .9 mm<sup>2</sup> Lead Wire, MAG-MATE, Magnet Wire Terminals

### View on TE.com >

Terminals & Splices > Magnet Wire Terminals



Magnet Wire Terminal Type: Poke-In Compatible With Cavity Size: Size 2 Aluminum Wire Size: 24 – 22 AWG Lead Wire Size: .5 – .9 mm<sup>2</sup>

# Features

#### duct T Cont **D**.



Product Type Features	
Compatible With Discrete Wire Type	Magnet Wire, Solid
Body Features	
Compatible With Cavity Size	Size 2
Contact Features	
Magnet Wire Terminal Type	Poke-In
Terminal Plating Material	Tin
Terminal Orientation	Twisted
Termination Features	
Termination Method to Wire & Cable	Insulation Displacement (IDC)
Mechanical Attachment	
Mating Retention Type	Locking
Dimensions	
Terminal Height	7.62 mm[.3 in]
Aluminum Wire Size	24 – 22 AWG

## 62935-3

Poke-In, 24 – 22 AWG Aluminum Wire, .51 – .64 mm Aluminum Wire, 20 – 18 AWG Lead Wire, .5 – .9 mm<sup>2</sup> Lead Wire, MAG-MATE, Magnet Wire Terminals



Lead Wire Size	20 – 18 AWG
Magnet Wire Size	.36 – .57 mm
Stock Thickness (Magnet Wire Side)	.41 mm[.016 in]
Product Length	7.87 mm[.31 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-65 – 150 °C[-85 – 302 °F]
Operation/Application	
Compatible With Wire Base Material	Aluminum, Copper
Identification Marking	
Identification Number	10
Packaging Features	
Packaging Quantity	12000
Packaging Method	Reel

# Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Soldar Process Capability	Not applicable for colder process capability

#### Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent to these limits as defined in the Annexes of Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits


## 62935-3

Poke-In, 24 – 22 AWG Aluminum Wire, .51 – .64 mm Aluminum Wire, 20 – 18 AWG Lead Wire, .5 – .9 mm<sup>2</sup> Lead Wire, MAG-MATE, Magnet Wire Terminals




as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

# **Compatible Parts**

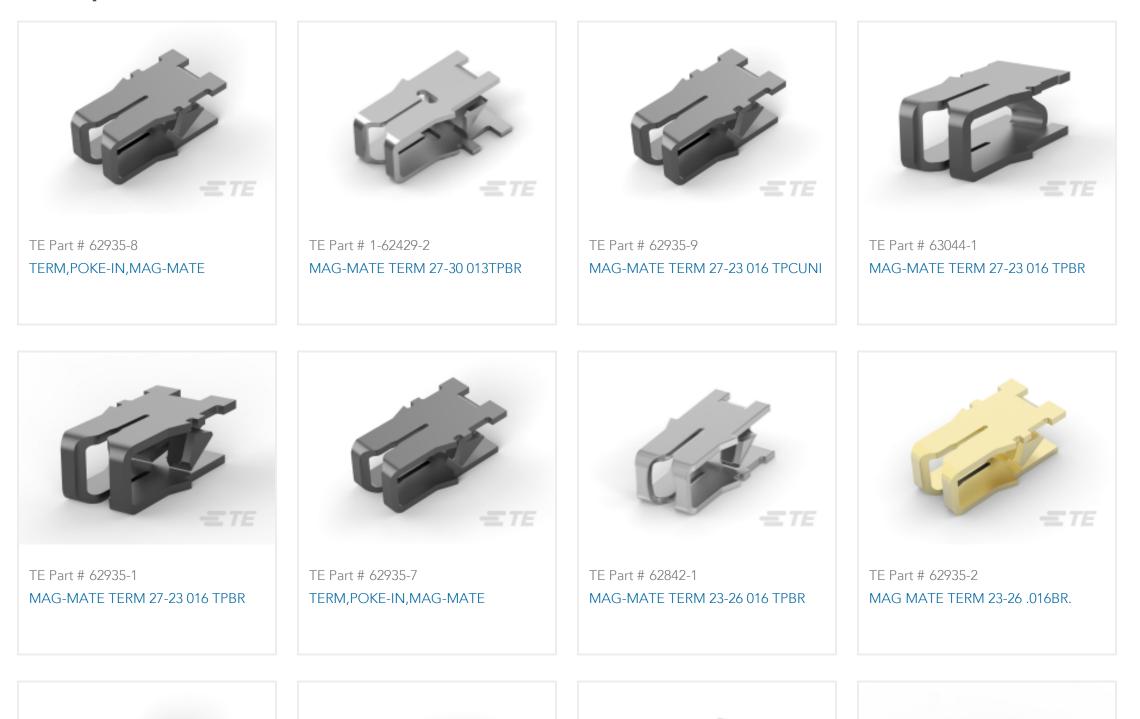



# Also in the Series | MAG-MATE

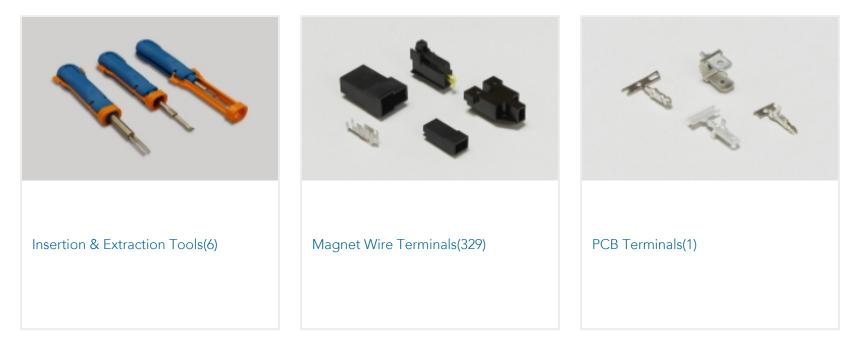


# **Customers Also Bought**

### 62935-3

Poke-In, 24 – 22 AWG Aluminum Wire, .51 – .64 mm Aluminum Wire, 20 – 18 AWG Lead Wire, .5 – .9 mm<sup>2</sup> Lead Wire, MAG-MATE, Magnet Wire Terminals



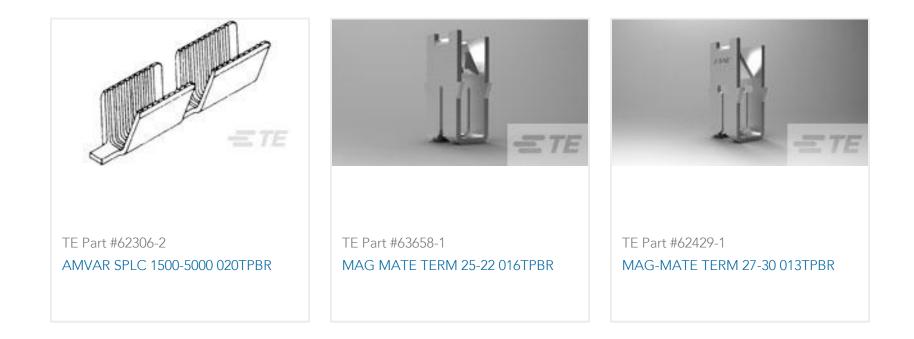

# Documents

# Product Drawings MAG-MATE TERM 27-23 016TPBR

English

**CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_62935-3\_BY.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_62935-3\_BY.3d\_igs.zip

English

Customer View Model

# ENG\_CVM\_CVM\_62935-3\_BY.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Magnet Wire Terminals & Splices

English

Product Specifications Application Specification

English

Agency Approvals UL Report

English