


### AMP-METRIMATE

TE Internal #: 6339168-1 RJ45 Connector, Multiple Ports, 2 x 4, Jack, Shielded, Cat 5, Standard - Latch Down, 8 Position, Low Profile, Through Hole -Solder, AMP-METRIMATE

#### View on TE.com >

Connectors > Modular Jacks & Plugs > RJ45 Connectors

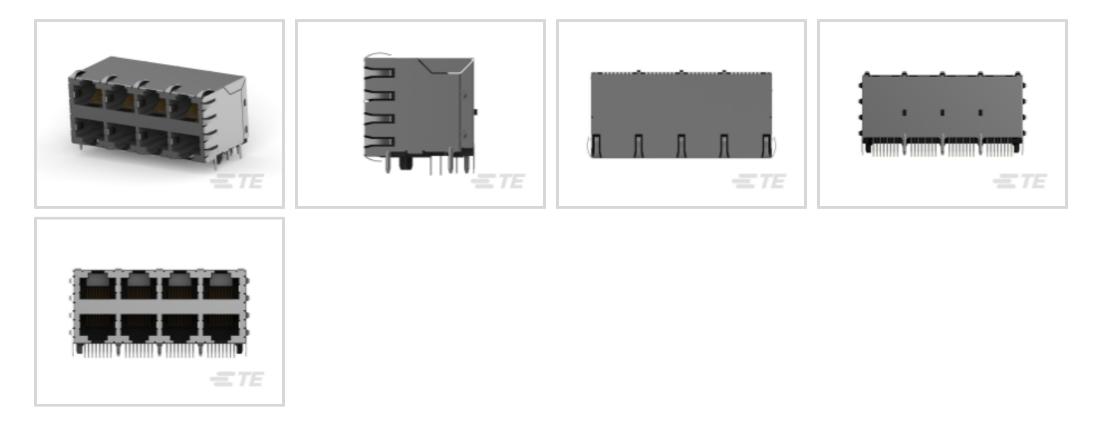

Modular Jack & Plug Interface Type: **RJ45** Port Configuration: **Multiple Ports** Port Matrix Configuration: **2 x 4** Modular Jacks & Plugs Products: **RJ Type Jacks & Plugs** Connector Contact Density: **Standard** 

# Features



### **Product Type Features**

Connector Product Type	Connector Assembly			
Modular Jack & Plug Interface Type	RJ45			
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs			
Modular Connector Style	Jack			
Grounding Options	PCB and Panel Ground			
Connector & Contact Terminates To	Printed Circuit Board			
Configuration Features				
Number of PCB Ground Tabs	7			
Multiple Port Configuration	Stacked			
Port Configuration	Multiple Ports			
Port Matrix Configuration	2 × 4			
Connector Contact Density	Standard			
Number of Positions	8			
Number of Loaded Positions	8			

RJ45 Connector, Multiple Ports, 2 x 4, Jack, Shielded, Cat 5, Standard - Latch Down, 8 Position, Low Profile, Through Hole - Solder, AMP-METRIMATE



PCB Mount Orientation	Right Angle
Body Features	
Grounding Tab Plating Material	Tin over Nickel
Shield Plating Material	Nickel
Shield Material	Copper Alloy
Modular Jack Latch Orientation	Standard - Latch Down
Connector Profile	Low
Contact Features	
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Current Rating (Max)	1 A
Contact Mating Area Plating Material	Gold (Au)
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material Thickness	1.27 μm[50 μin]
Termination Features	
Termination Method to PCB	Through Hole - Solder
Termination Post & Tail Length	3.56 mm[.14 in]

# Mechanical Attachment

Panel Mount Feature	Without			
Connector Mounting Type	Panel Mount			
Housing Features				
Mating Entry Location	Side			
Centerline (Pitch)	1.02 mm[.04 in]			
Housing Color	Black			
Housing Material	PCT Polyester			
Dimensions				
PCB Thickness (Recommended)	1.57 mm[.062 in]			
Connector Height	25.37 mm[.998 in]			
Usage Conditions				
Operating Temperature Range	-40 - 60 °C[-40 - 140 °F]			
Operation/Application				
Indicator Type	No Indicator			

**C** For support call+1 800 522 6752

RJ45 Connector, Multiple Ports, 2 x 4, Jack, Shielded, Cat 5, Standard - Latch Down, 8 Position, Low Profile, Through Hole - Solder, AMP-METRIMATE



Shielded	Yes
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Performance Category	Cat 5
Packaging Features	
Packaging Quantity	10
Packaging Method	Tray
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Compliant Compliant

#### Halogen Content

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Wave solder capable to 265°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**

RJ45 Connector, Multiple Ports, 2 x 4, Jack, Shielded, Cat 5, Standard - Latch Down, 8 Position, Low Profile, Through Hole - Solder, AMP-METRIMATE



TE Part # 188729-1 8P.COVER/SOLD.STOP

# Also in the Series AMP-METRIMATE

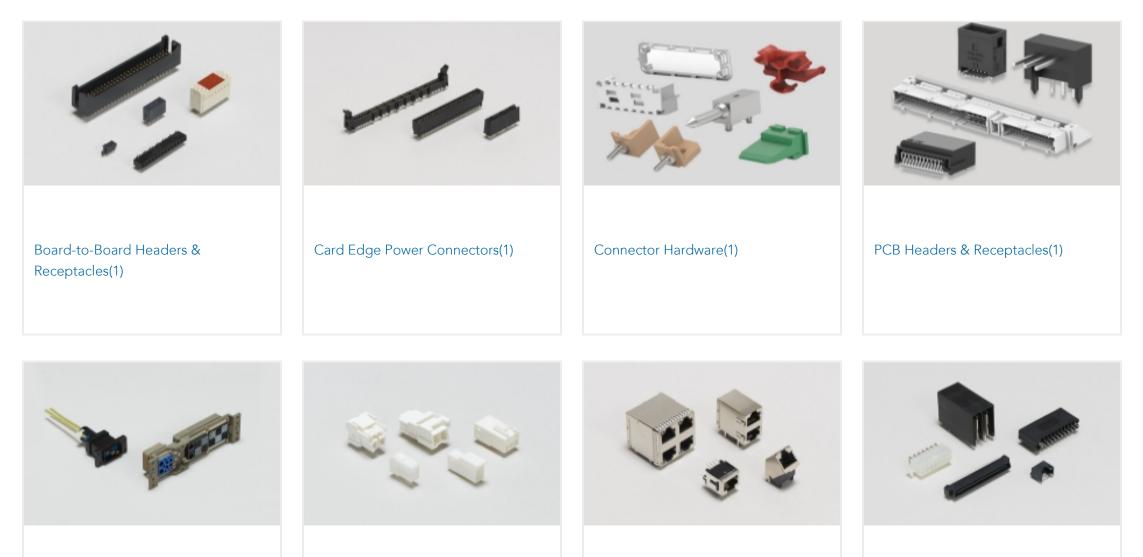

Rack & Panel Connectors(1)	Rectangular Power Connectors(3)	RJ45 Connectors(44)	Standard Rectangular Connectors(2)	

# Customers Also Bought





RJ45 Connector, Multiple Ports, 2 x 4, Jack, Shielded, Cat 5, Standard - Latch Down, 8 Position, Low Profile, Through Hole - Solder, AMP-METRIMATE





# Documents

### Product Drawings ASSY,SHLD,2X4,STK MJ,WAVE PNL

English

### **CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_6339168-1\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_6339168-1\_A.3d\_igs.zip

English

Customer View Model

### ENG\_CVM\_CVM\_6339168-1\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English