




Terminals & Splices > Quick Disconnects

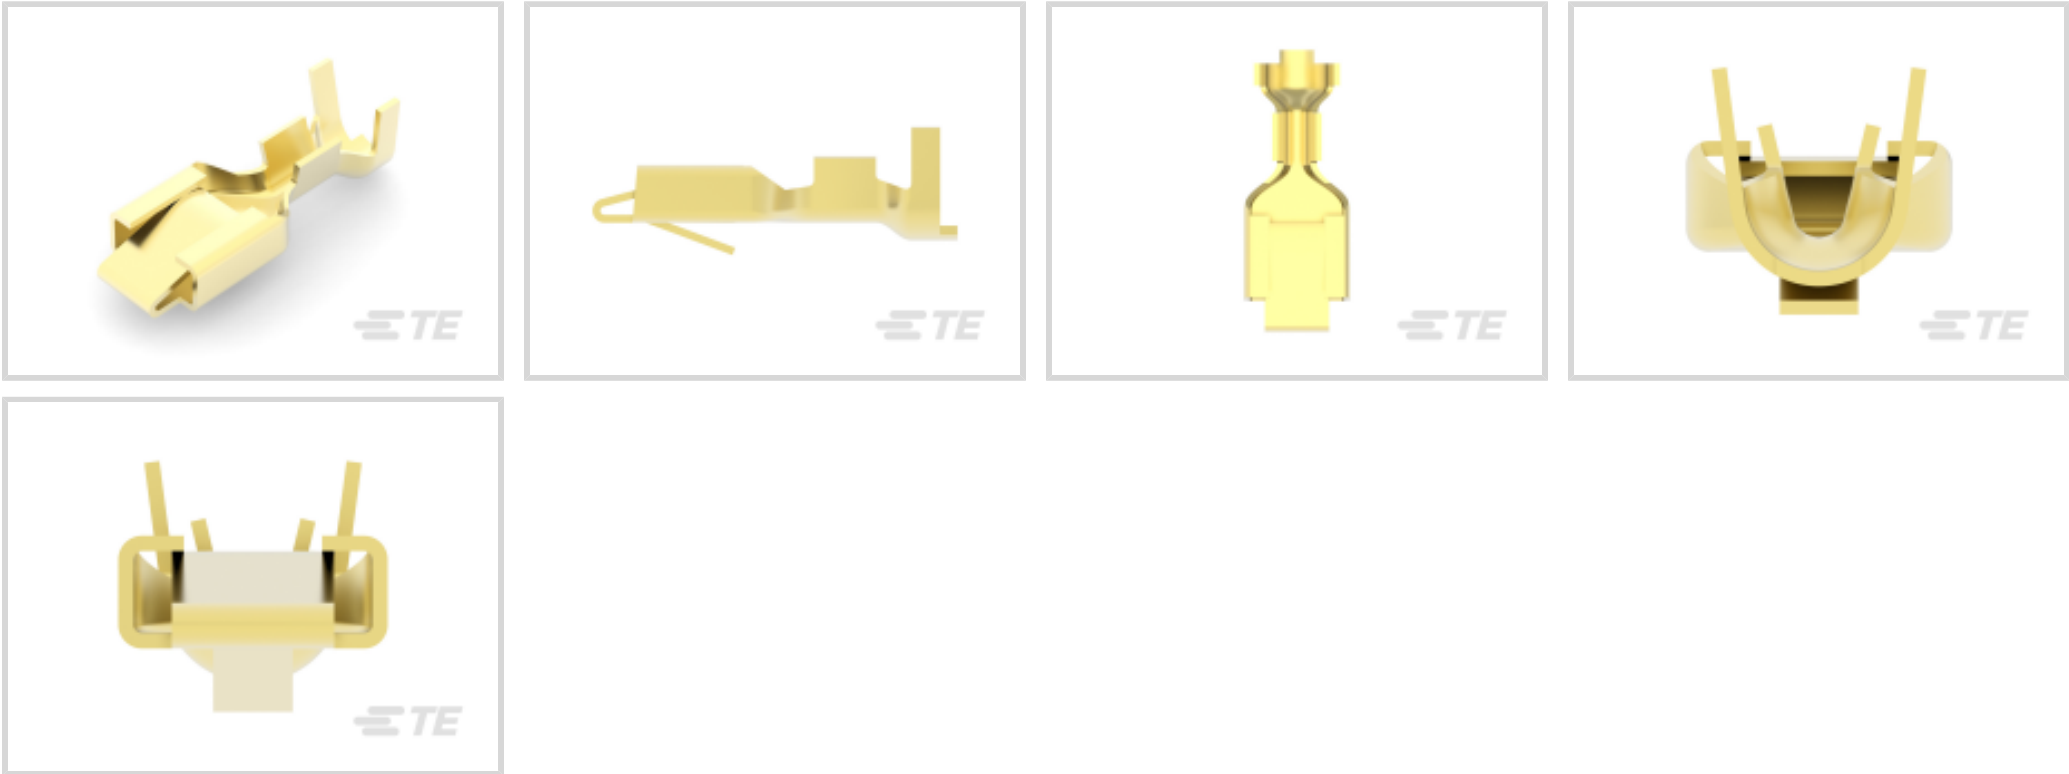

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.82 – 2.08 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Terminal Orientation: **Straight**

Features

Product Type Features

Insertion Force	High
-----------------	------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Unplated
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------



Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Locking Lance

Dimensions

Product Length	20.39 mm[.803 in]
Compatible Insulation Diameter Range	3.9 mm[.154 in]
Terminal Material Thickness	.46 mm[.018 in]
Wire Size	.82 – 2.08 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Packaging Features

Packaging Quantity	2400
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits



as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


 TE Part # 5-2266591-2 OCEAN-2.0-APPLICATOR-S-110F220F-RSA	 TE Part # 5-2266591-1 OCEAN-2.0-APPLICATOR-S-110F220F-RSM	 TE Part # 2266591-2 OCEAN-2.0-APPLICATOR-S-110F220F-RSA	 TE Part # 2266591-1 OCEAN-2.0-APPLICATOR-S-110F220F-RSM
 TE Part # 7-2266591-7 OCEAN_2.0_SPARE_PART_KIT-110F220F	 TE Part # 2305570-1 Strip Terminal Cutter-Side Feed-No Crimp	 TE Part # 640417-1 BLADE REC 250 18-14AWG BR	

Also in the Series | FASTIN-FASTON 250


 Crimp Terminal Housings(195)	 Insertion & Extraction Tools(2)	 Quick Disconnects(216)
----------------------------------	-------------------------------------	----------------------------

Customers Also Bought


 TE Part #1062-16-0177 SOC, SF, SIZE 16, 14-18, SN/SN	 TE Part #2066046-4 2 POS MINI FUSE BOX ASSY	 TE Part #2292800-3 AS16,PLUG BACKSHELL KIT,ST,06P, NC12	 TE Part #DT04-12PA-E004 REC, 12P, BLK, N, A
---	--	--	--

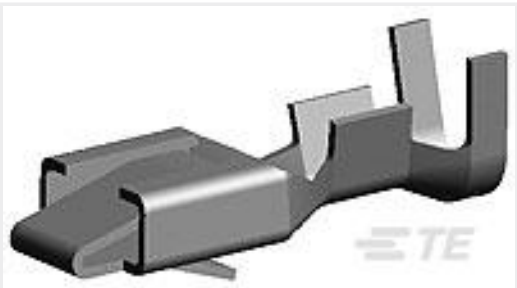

TE Part #640418-2
BLADE REC 250 18-14AWG TPBR

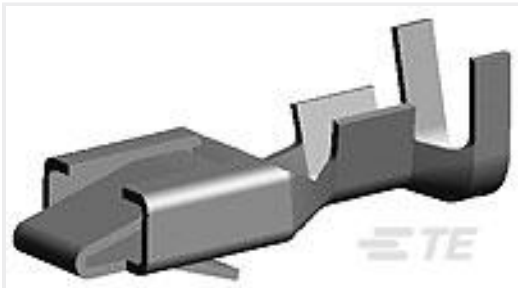

TE Part #640841-1
BLADE REC 250 20-16AWG BR

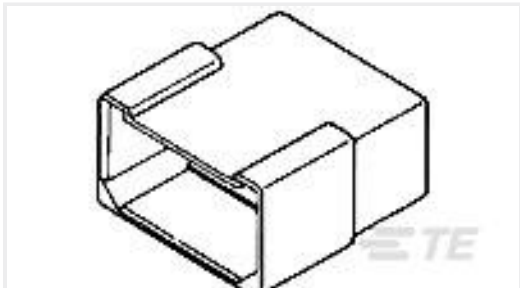

TE Part #180906-5
FF 250 TAB HSG 6P NYLON BLACK



TE Part #42400-2
250 FASTON REC 18-14 AWG TPBR



TE Part #2098253-2
SOC, SF, SIZE 16, 14-16 AWG, NI/SN



TE Part #42946-2
RING 12-8 AWG TPBR

Documents

Product Drawings

BLADE REC 250 18-14AWG BR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_640418-1_AF_c-640418-1-af.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_640418-1_AF_c-640418-1-af.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_640418-1_AF_c-640418-1-af.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

FASTIN_FASTON_Product_Line

English

Product Specifications

Application Specification

English

Special 250 Blade Receptacle Terminal

English

640418-1

Quick Disconnect Receptacle, 18 – 14 AWG, .82 – 2.08 mm² Wire, 6.35 mm [.25 in]
Tab Width, Straight, Brass, Unplated Plating, FASTIN-FASTON 250

