


## EUROCARD | Eurocard Type R

TE Internal #: 650897-5 Receptacle, Board-to-Board, 64 Position, 2.54 mm [.1 in] Centerline, Printed Circuit Board, 2 Row, Right Angle, Eurocard Type R, Eurocard Connectors

### View on TE.com >

### Connectors > PCB Connectors > Backplane Connectors > Eurocard Connectors

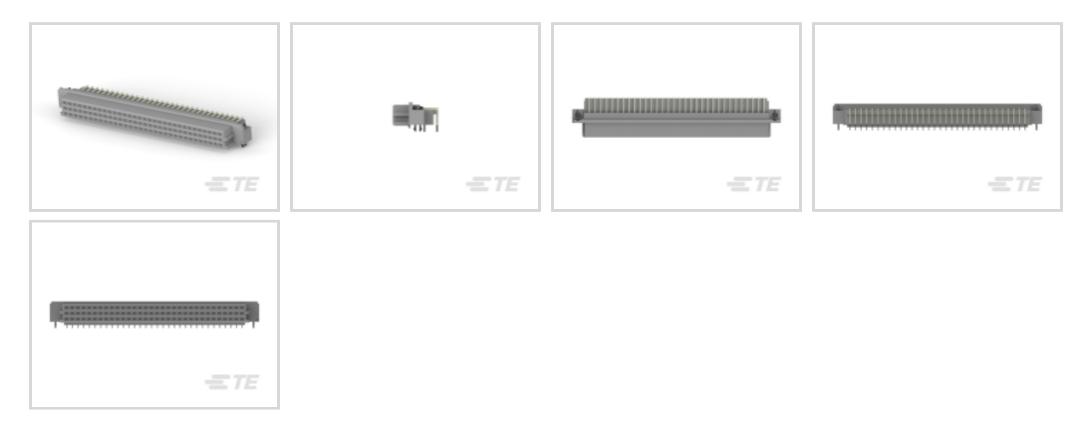

Connector & Housing Type: Receptacle Connector System: Board-to-Board Termination Post & Tail Length: 2.79 mm [.11 in] Number of Positions: 64

Centerline (Pitch): 2.54 mm [.1 in]

## Features



## **Product Type Features**

Connector & Housing Type	Receptacle
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
DIN Size	Standard
DIN Level	II
Configuration Features	
Number of Power or Coaxial Positions	64
Number of Positions	64
Number of Rows	2
PCB Mount Orientation	Right Angle
Number of Columns	48
Rows Loaded	A, C
Number of Signal Positions	64
Electrical Characteristics	

Receptacle, Board-to-Board, 64 Position, 2.54 mm [.1 in] Centerline, Printed Circuit Board, 2 Row, Right Angle, Eurocard Type R, Eurocard Connectors



Operating Voltage	250 VAC
Body Features	
Primary Product Color	Gray
Contact Features	
PCB Contact Termination Area Plating Material Thickness	2.54 – 5.08 μm[100 – 200 μin]
Contact Mating Area Plating Material	Gold (Au)
Contact Base Material	Phosphor Bronze
PCB Contact Termination Area Plating Material	Tin-Lead
Contact Type	Socket
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Contact Current Rating (Max)	1.5 A
Termination Features	
Termination Method to PCB	Through Hole - Solder
Termination Post & Tail Length	2.79 mm[.11 in]
Mechanical Attachment	
Connector Mounting Type	Board Mount
PCB Mount Retention Type	Boardlock
Mating Alignment Type	Polarization
Mating Alignment	With
PCB Mount Alignment	Without
PCB Mount Retention	With
Housing Features	
Housing Material	Polyester GF
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
PCB Thickness (Recommended)	1.57 mm[.062 in]
Row-to-Row Spacing	2.54 mm[.1 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Shielded	No
Circuit Application	Power & Signal

**C** For support call+1 800 522 6752

Receptacle, Board-to-Board, 64 Position, 2.54 mm [.1 in] Centerline, Printed Circuit Board, 2 Row, Right Angle, Eurocard Type R, Eurocard Connectors



### **Industry Standards**

UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Box

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (13% in 4690948374) Aticle Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900

Wave solder capable to 240°C

ppm.

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**

Receptacle, Board-to-Board, 64 Position, 2.54 mm [.1 in] Centerline, Printed Circuit Board, 2 Row, Right Angle, Eurocard Type R, Eurocard Connectors






# Also in the Series | Eurocard Type R

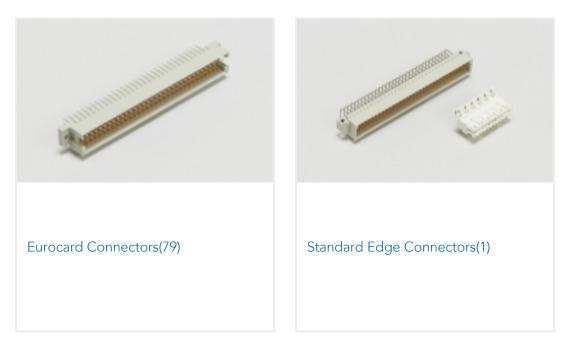

# Customers Also Bought

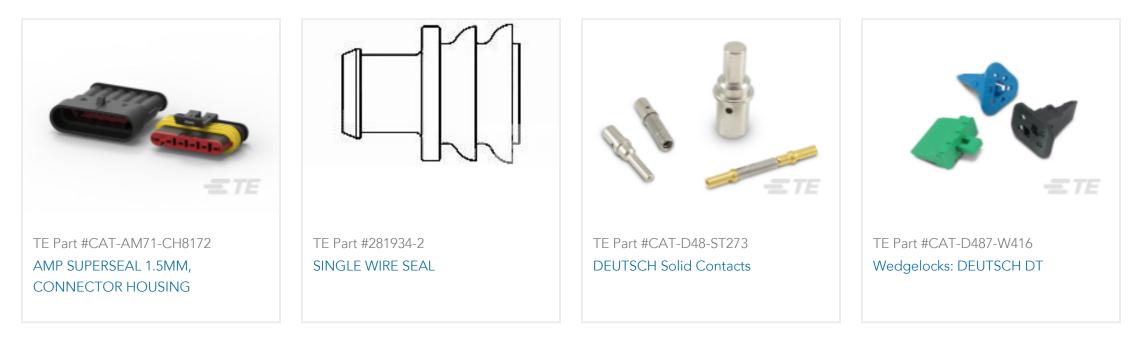



## Documents

## Product Drawings 064 EURO TYPE R RECEPT BL ASSY

English

## **CAD** Files

3D PDF

3D

Receptacle, Board-to-Board, 64 Position, 2.54 mm [.1 in] Centerline, Printed Circuit Board, 2 Row, Right Angle, Eurocard Type R, Eurocard Connectors



**Customer View Model** 

ENG\_CVM\_CVM\_650897-5\_AC.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_650897-5\_AC.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_650897-5\_AC.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English