




Terminals & Splices > Quick Disconnects

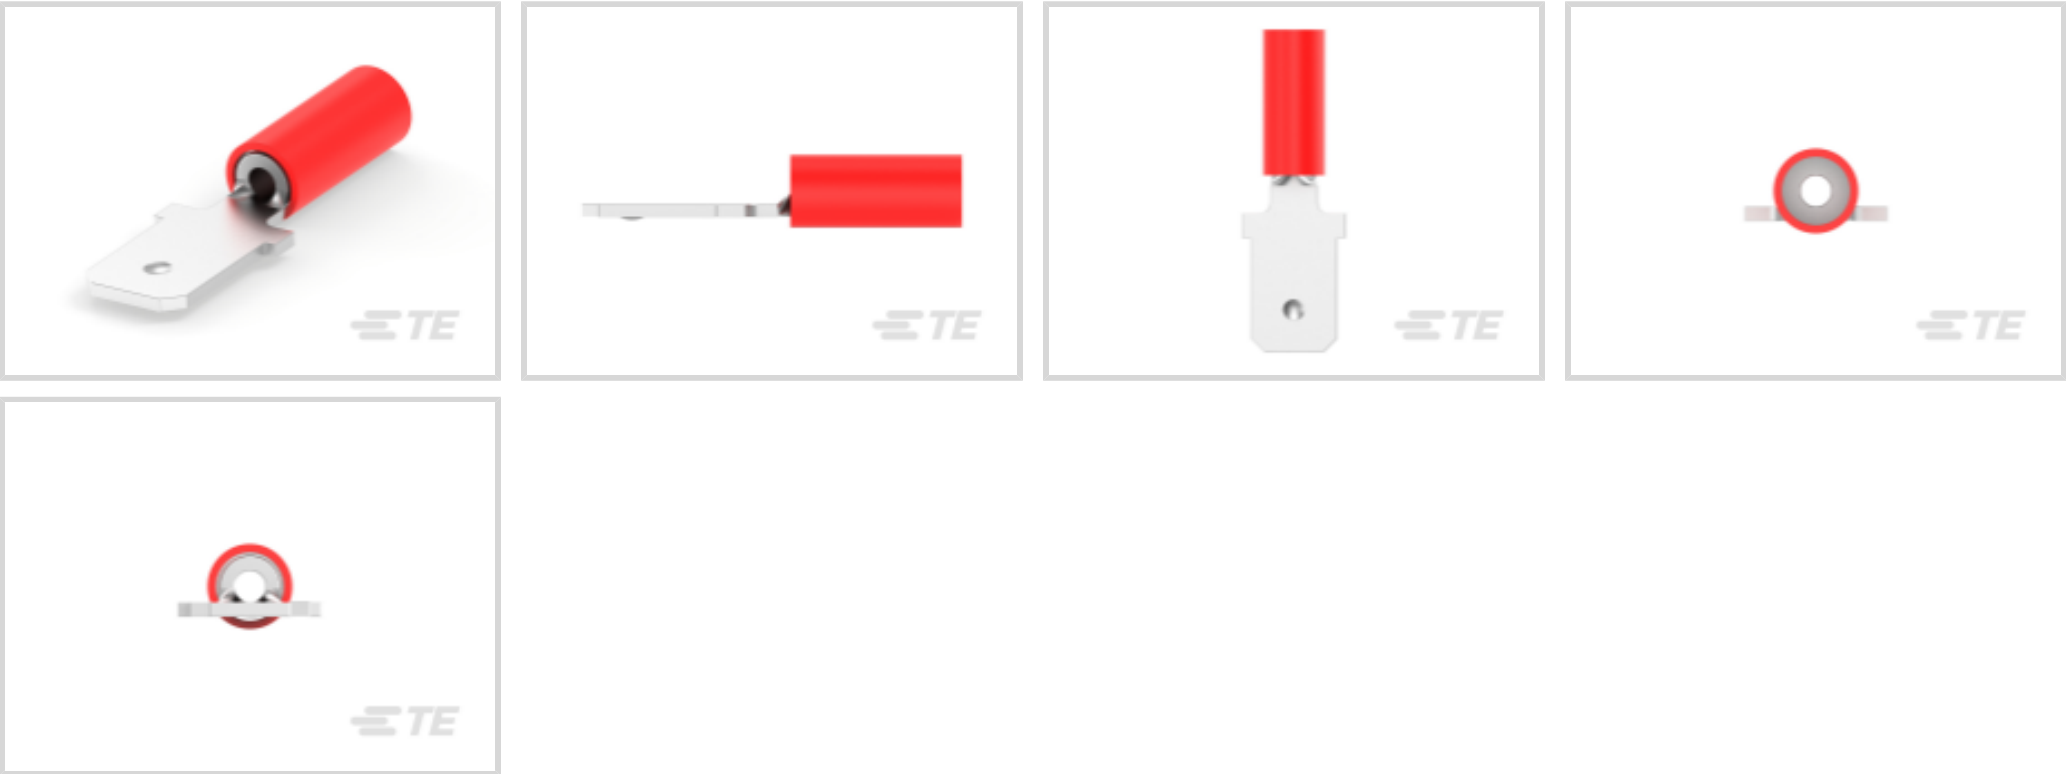

Quick Disconnect Terminal Type: **Tab**
Wire Size: **592 – 3260 CMA**
Mating Tab Width: **6.35 mm [.25 in]**

Features

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Contact Features

Quick Disconnect Terminal Type	Tab
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Copper Alloy
Terminal Plating Material	Tin
Crimp Type	Compression Crimp
Barrel Type	Closed

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions



Product Length	23.11 mm[.91 in]
Compatible Insulation Diameter Range	3.68 mm[.145 in]
Wire Size	592 – 3260 CMA

Usage Conditions

Insulation Option	Partially Insulated
-------------------	---------------------

Packaging Features

Packaging Quantity	5000
Packaging Method	Reel

Other

Barrel Color	Red
--------------	-----

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 169404
[CERTI-LOK DIE](#)



TE Part # 59824-1
[TETRA-CRIMP PIDG PG FASTON 22-10 ASSY](#)



TE Part # 58423-1
[DIE, RBY IS9252](#)



TE Part # 47386
[DAHT PG PIDG 26-16 ASSY](#)



TE Part # 58433-3
[PRO CR ASSY, RBY IS9252](#)

Customers Also Bought



TE Part #2-34162-1
[TERMINAL,PG R 16-14 1/4](#)



TE Part #485043-1
[SPLICE 4000-9000 .020 BR](#)



TE Part #63130-3
[SPLICE REC. 1500-5000 .020 TPBR](#)



TE Part #2-34150-1
[PG R 22-16 COMM 22-18 MIL 1/4](#)




TE Part #62026-1
[187 FASTON REC 20-16 AWG TPBR](#)




TE Part #61944-1
[250 FASTON REC 18-14 AWG BR](#)




TE Part #2-33466-3
[TERMINAL,SOLIS R 6 5/16](#)

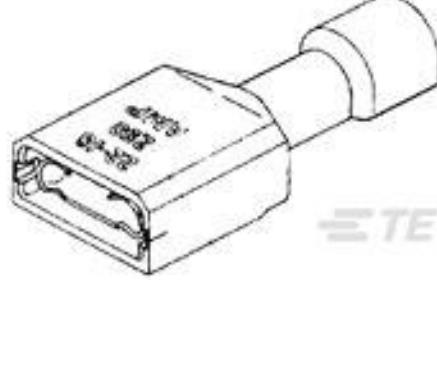

TE Part #2-520261-2
[ULTRA-FAST 187 ASY REC 22-18 TPBR](#)

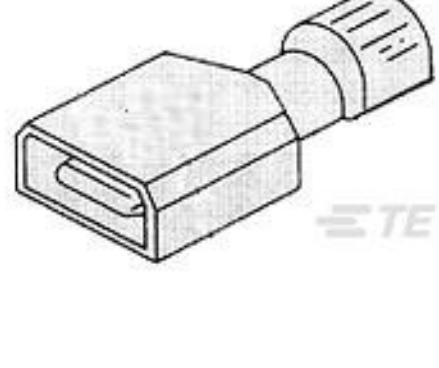

TE Part #2-521055-2
[ULTRAFAST 250 ASSY TAB 22-18 AWG TPBR](#)

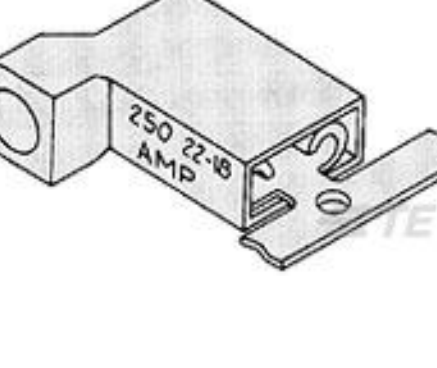

TE Part #3-520132-2
[ULTRAFAST 250 ASSY FLAG REC 16-14 TPBR](#)

Documents



Product Drawings

TAB,PIDG TERMI-BK 22-16

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_66023-4_U.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_66023-4_U.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_66023-4_U.3d_stp.zip

English

Customer View Model

ENG_CVM_66023-4_K.3d_igs.zip

English

Customer View Model

ENG_CVM_66023-4_K.3d_stp.zip

English

Customer View Model

ENG_CVM_66023-4_K.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.