



Connectors > Contacts > Connector Contacts



Contact Type: **Pin**

Contact Mating Area Plating Material: **Tin (Sn)**

Wire Contact Termination Area Plating Material: **Tin-Lead**

Contact Size: **Size 16**

Wire Size: **26 – 24 AWG**

Features

Contact Features

Contact Underplating Material	Nickel
Contact Orientation	Straight
Mating Pin Diameter	1.57 mm[.062 in]
Contact Underplating Material Thickness	1.27 µm[50 µin]
Contact Mating Area Plating Material Thickness	2.54 µm[100 µin]
Wire Contact Termination Area Plating Material Finish	Bright
Wire Contact Termination Area Plating Thickness	1.27 µm[50 µin]
Contact Type	Pin
Contact Mating Area Plating Material	Tin (Sn)
Wire Contact Termination Area Plating Material	Tin-Lead
Contact Size	Size 16
Contact Base Material	Brass
Contact Current Rating (Max)	13 A

Termination Features



Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions

Compatible Insulation Diameter Range	.89 – 1.4 mm [.035 – .055 in]
Wire Size	.12 – .2 mm²

Usage Conditions

Operating Temperature Range	-55 – 90 °C [-67 – 194 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
---	---------

Packaging Features

Packaging Quantity	100
Packaging Method	Box, Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (13% in 4690948374) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 58495-2
PROCRIMPER DIE ASSY MULTIMATE

TE Part # 539972-1
EXTRACTION TOOL

TE Part # 91515-1
CCII TYPE III+ MNL PIN SKT 30-20
ASSY

TE Part # 305183
EXTRACT TOOL TYPE 2 20-16
ASSY

TE Part # 58495-1
PRO CRIMPER ASSY MULTIMATE

TE Part # 200893-2
INSERTION TOOL CONT

Also in the Series | AMP Type III+

Connector Contacts(365)

Insertion & Extraction Tools(4)

Power Contacts(365)


Customers Also Bought



TE Part #1658623-4
20 NOVO MIL 30DP, LEAD FREE



TE Part #1-66099-5
III+ PIN,18-16,TIN ,LP

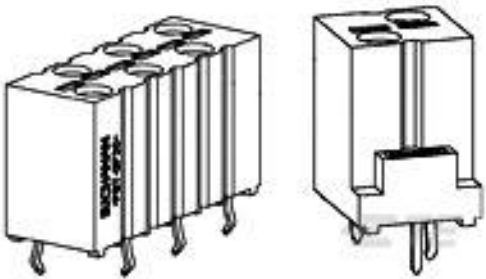

TE Part #1811398-1
ASY,SCRLESS WIRE CONN,VERT,6P



TE Part #350218-1
UMNL PIN 20-14 .0126PTPBR



TE Part #1-2273006-2
M8 x 1.0 straight plug Pigtail Shld



TE Part #1-66103-6
III+ PIN,24-20,15AU/FL,SMPACK



TE Part #2273054-1
M12 Female pnl Mld Rear Mt PG9 pigt A



TE Part #T4111001051-000
M12,MALE,STRAIGHT,A CODE,5P, PG7,GOLD



TE Part #1658622-4
20 NOVO MIL/CTR 30DP,LEAD FREE



TE Part #7-1625999-4
HSC100 68K 5%

Documents

Product Drawings

III+ PIN,26-24,TIN-LEAD,SMPACK

English

CAD Files

Customer View Model

ENG_CVM_CVM_66107-9_AC.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_66107-9_AC.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_66107-9_AC.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications



Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

Japanese

Instruction Sheet (U.S.)

English