

AMP

TE Internal #: 66253-1 Tab Contact, Tin-Lead, 10 AWG, 5 – 6 mm² Wire, Crimp, Copper, Power, -40 – 85 °C [-40 – 185 °F]

View on TE.com >



Connectors > Contacts > Connector Contacts



Contact Type: Tab Contact Mating Area Plating Material: Tin-Lead

Wire Contact Termination Area Plating Material: Tin-Lead

Wire Size: **5 – 6 mm²**

Features

Contact Features

Contact Underplating Material	Copper
Contact Orientation	Right Angle
Contact Mating Area Plating Material Thickness	1.27 μm[50 μin]
Wire Contact Termination Area Plating Material Finish	Bright
Mating Tab Width	5.84 mm[.23 in]
Mating Tab Thickness	2.67 mm[.105 in]
Wire Contact Termination Area Plating Thickness	1.27 μm[50 μin]
Contact Type	Tab
Contact Mating Area Plating Material	Tin-Lead
Wire Contact Termination Area Plating Material	Tin-Lead
Contact Base Material	Copper
Contact Current Rating (Max)	15 A
Termination Features	
Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Compatible Insulation Diameter Range	4.83 – 5.59 mm[.19 – .22 in]

66253-1

Tab Contact, Tin-Lead, 10 AWG, 5 – 6 mm² Wire, Crimp, Copper, Power, -40 – 85 °C [-40 – 185 °F]



Wire Size	$5 - 6 \text{ mm}^2$
Usage Conditions	
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Circuit Application	Power
Packaging Features	
Packaging Quantity	1500
Packaging Method	Reel
Product Compliance For compliance documentation, visit the product page on TE.com>	
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Not Compliant
Product Compliance For compliance documentation, visit the product page on TE.com>	
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Not Compliant

Halogen Content

Solder Process Capability

Pb (13% in 4690948374)

Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

66253-1

Tab Contact, Tin-Lead, 10 AWG, 5 – 6 mm² Wire, Crimp, Copper, Power, -40 – 85 °C [-40 – 185 °F]





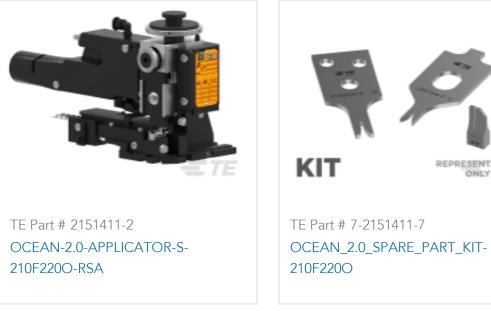





REPRESENTATION

I I PE AII FEIVIALE COINT (STRIP)	
-----------------------------------	--

MALE CONTACT ASSY. (STRIP)

RING TONGUE 10-6 AWG TPBR

TPBR





Documents

66253-1

Tab Contact, Tin-Lead, 10 AWG, 5 – 6 mm² Wire, Crimp, Copper, Power, -40 – 85 °C [-40 – 185 °F]



Product Drawings

MALE CONTACT ASSY. (STRIP)

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_66253-1_AF_c-66253-1-af.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_66253-1_AF_c-66253-1-af.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_66253-1_AF_c-66253-1-af.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Datasheets & Catalog Pages

AMP Circular Connectors for Commercial Signal & Power Applications

English

Power Contacts

English

M_SERIES_PIN_AND_SOCKET_CONNECTORS

English

Product Specifications Application Specification

English