

TE Internal #: 66728-5

Pin Contact, Tin (Sn), 250 VAC, Locking Lance Contact Retention,


Discrete Wire, 28 – 22 AWG, .08 – .34 mm<sup>2</sup> Wire, 175.64 – 753.89

CMA, Crimp, Brass

View on TE.com >



#### Connectors > Contacts > Connector Contacts

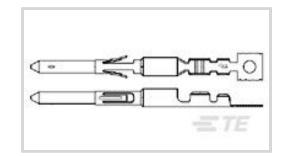

Contact Type: Pin

Contact Mating Area Plating Material: Tin (Sn)

Wire Contact Termination Area Plating Material: Tin

Operating Voltage: 250 VAC

Contact Retention Within Housing: With

### **Features**

## **Configuration Features**

Compatible With Wire & Cable Type	Discrete Wire
Electrical Characteristics	
Operating Voltage	250 VAC
Contact Features	
Wire Contact Termination Area Plating Thickness	2.54 μm[100 μin]
Contact Mating Area Plating Material Thickness	1.27 μm[50 μin]
Contact Type	Pin
Contact Mating Area Plating Material	Tin (Sn)
Wire Contact Termination Area Plating Material	Tin
Contact Retention Within Housing	With
Contact Base Material	Brass
Contact Current Rating (Max)	7.5 A
Termination Features	
Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Locking Lance

**Dimensions** 

Mechanical Attachment

Contact Retention Type Within Housing



Compatible Insulation Diameter Range	.66 – 1.37 mm[.036 – .054 in]
Wire Size	175.64 – 753.89 CMA
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Compatible With Wire Base Material	Copper
Circuit Application	Power & Signal
Circuit Application  Industry Standards	Power & Signal
	Power & Signal  CSA, UL
Industry Standards	
Industry Standards  Compatible With Agency/Standards Products	CSA, UL

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach



# Compatible Parts

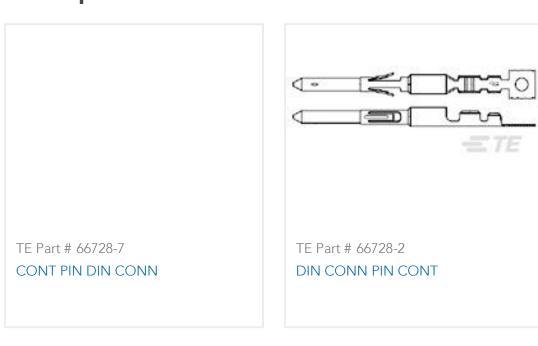


# Customers Also Bought










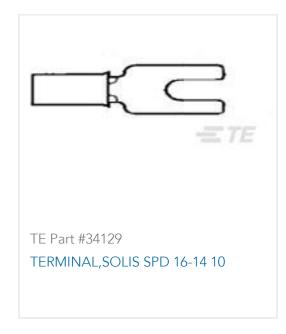

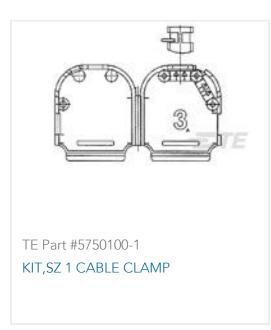









## **Documents**

Product Drawings
CIRC DIN PIN CONTACT,LP

English

CAD Files
3D PDF



3D

**Customer View Model** 

ENG\_CVM\_CVM\_66728-5\_S.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_66728-5\_S.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_66728-5\_S.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Product Specifications** 

**Application Specification** 

English

**Instruction Sheets** 

Instruction Sheet (U.S.)

English

Crimping Die Assemblies 58215-1 through -6 for Circular DIN Connector Ferrules

English