
# 696274-2 - ACTIVE

TE Internal #: 696274-2 Wire Pin, 1.78 mm [.07 in] Pin Diameter, 17 – 13 AWG, 1 – 2.5 mm<sup>2</sup> Wire, 1974 – 5131 CMA, Closed Barrel, Tin Plating, 23.7 mm [.933 in] Length

#### View on TE.com >



Terminals & Splices > Crimp Wire Pins, Tabs & Ferrules

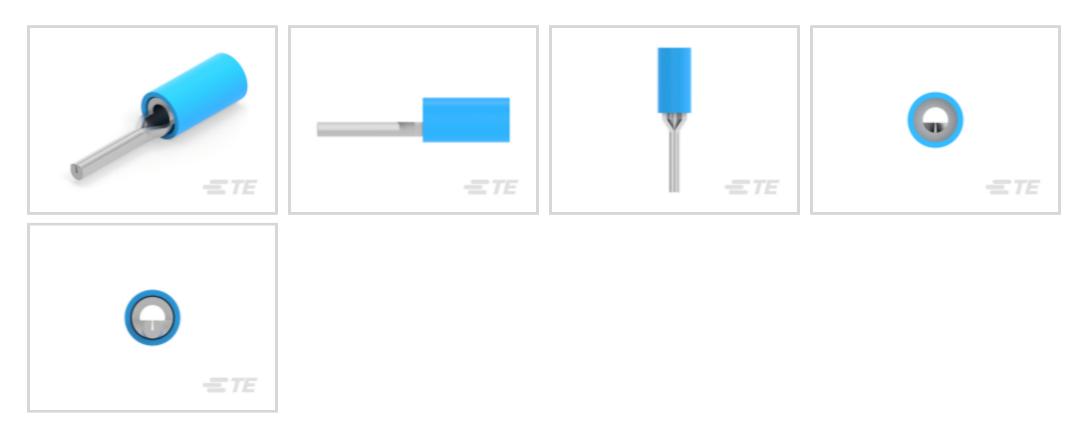

Crimp Wire Terminal Type: Wire Pin

Mating Pin Diameter: 1.78 mm [.07 in ]

Compatible Insulation Diameter Range: 4.32 mm, 2.92 – 4.31 mm [.17 in, .115 – .17 in]

Wire Size: **1 – 2.5 mm<sup>2</sup>** 

### Features

#### **Product Type Features**

Sealable	No	
Compatible With Discrete Wire Type	Stranded	
Wire Insulation Support Retention Type	Insulation Support	
Configuration Features		
Compatible With Wire & Cable Type	Discrete Wire	
Body Features		
Sleeve Material	Copper	
Primary Product Color	Blue	
Insulation Material	Nylon	
Contact Features		
Contact Mating Area Length	9.9 mm[.39 in]	
Contact Fabrication	Stamped & Formed	
Crimp Wire Terminal Type	Wire Pin	
Mating Pin Diameter	1.78 mm[.07 in]	
Barrel Type	Closed	

**C** For support call+1 800 522 6752

### 696274-2

Wire Pin, 1.78 mm [.07 in] Pin Diameter, 17 – 13 AWG, 1 – 2.5 mm<sup>2</sup> Wire, 1974 – 5131 CMA, Closed Barrel, Tin Plating, 23.7 mm [.933 in] Length



Terminal Plating Material	Tin	
Contact Shape & Form	Round	
Terminal Orientation	Straight	
Mechanical Attachment		
Wire Insulation Support	With	
Dimensions		
Compatible Insulation Diameter Range	4.32 mm, 2.92 – 4.31 mm[.17 in][.115 – .17 in]	
Wire Size	1974 – 5131 CMA	
Terminal Material Thickness	.79 mm[.031 in]	
Overall Product Length	23.7 mm[.933 in]	
Usage Conditions		
Insulation Option	Partially Insulated	
Packaging Features		
Packaging Quantity	4000	
Packaging Method	Tape Mounted	

### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant		
EU ELV Directive 2000/53/EC	Compliant No Restricted Materials Above Threshold		
China RoHS 2 Directive MIIT Order No 32, 2016			
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC		
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free		
Solder Process Capability	Not applicable for solder process capability		

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part

#### 696274-2

Wire Pin, 1.78 mm [.07 in] Pin Diameter, 17 – 13 AWG, 1 – 2.5 mm<sup>2</sup> Wire, 1974 – 5131 CMA, Closed Barrel, Tin Plating, 23.7 mm [.933 in] Length



numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**



# Customers Also Bought




TE Part #9-1768044-3 STD12W-MINUS

TE Part #ES4025-000 55A1143-24-9/93/95/96-9



TE Part #YDTS24F15-19SAV001 RECP ASSY

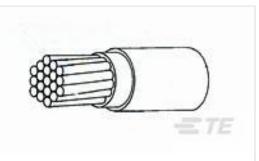

TE Part #282318-003 81044/12-22-8

TE Part #931273-000 HEX40-AC-00-19-A7-1	TE Part #A75939-000 HX-SCE-1K-2.4-50-S1-9	TE Part #NB15134001 HT-200-1/4-X-SP	TE Part #CAT-R21-7310723 Low Profile Heat Shrink Boots: Poly Molded, Lipped, Straight



### Documents

**Product Drawings** 

**&** For support call+1 800 522 6752

#### 696274-2

Wire Pin, 1.78 mm [.07 in] Pin Diameter, 17 – 13 AWG, 1 – 2.5 mm<sup>2</sup> Wire, 1974 – 5131 CMA, Closed Barrel, Tin Plating, 23.7 mm [.933 in] Length



#### TERM, WIRE PIN, PIDG, 16-14, T&R

English

**CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_696274-2\_E.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_696274-2\_E.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_696274-2\_E.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.