




Connectors > Contacts > Connector Contacts

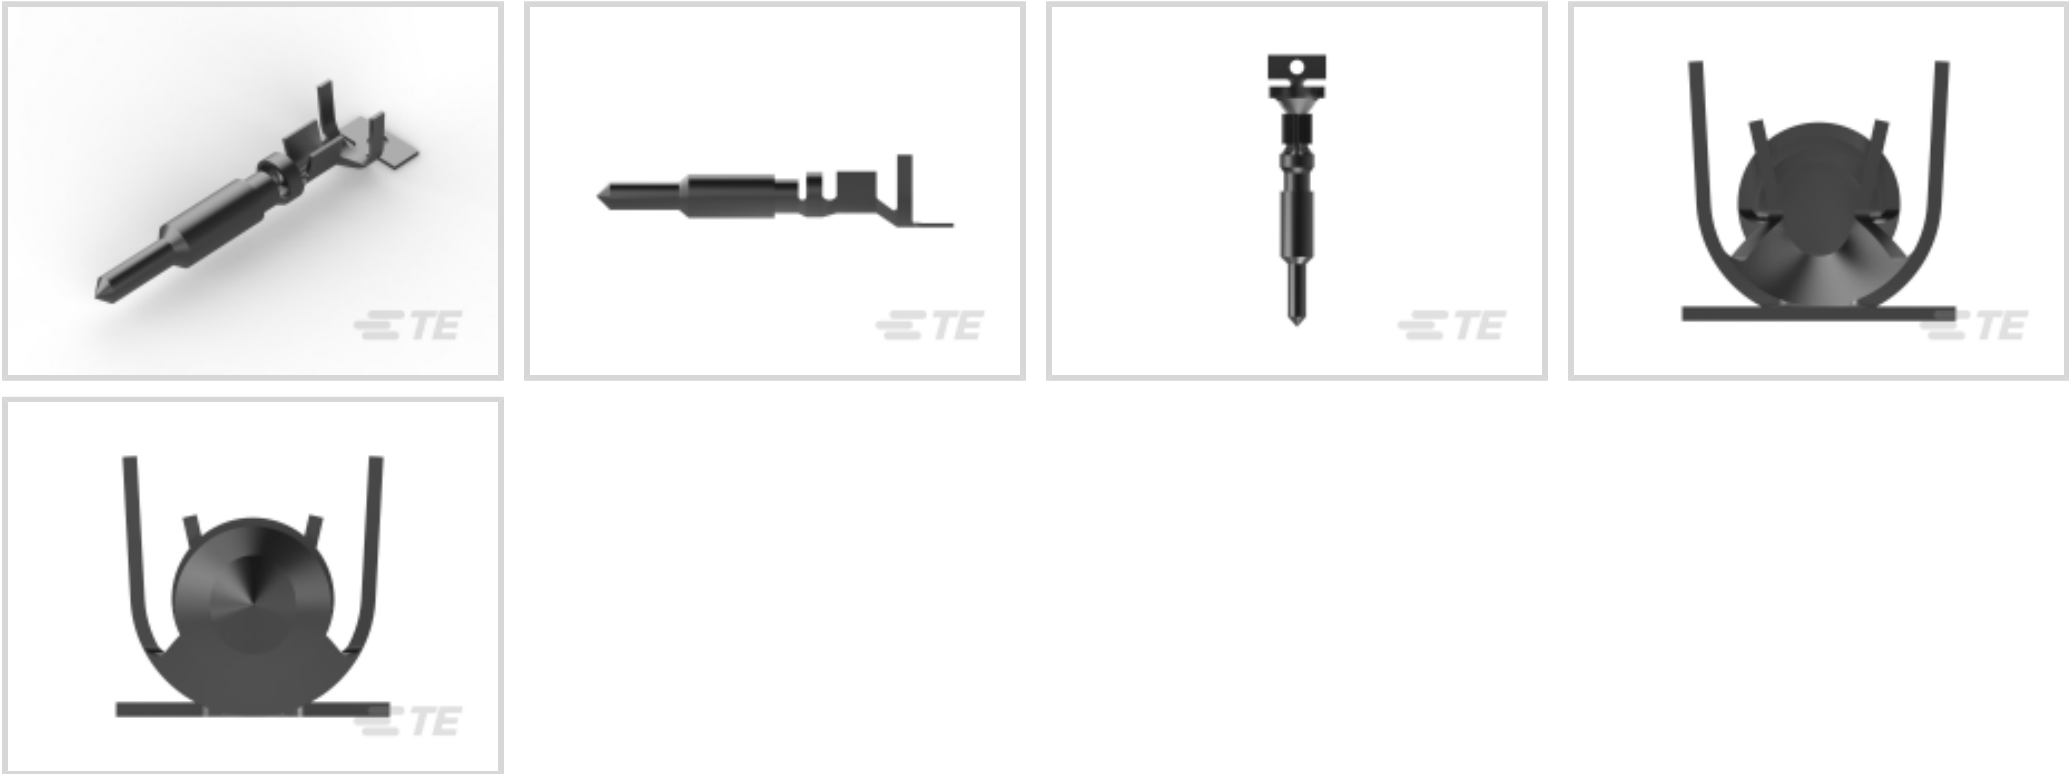

Contact Type: **Pin**
Contact Mating Area Plating Material: **Tin (Sn)**
Wire Contact Termination Area Plating Material: **Pre-Tin**
Operating Voltage: **600 VAC**
Contact Retention Within Housing: **Without**

Features

Product Type Features

Discrete Wire Type	Stranded
--------------------	----------

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Contact Features

Contact Orientation	Straight
Mating Pin Diameter	2.18 mm[.086 in]
Wire Contact Termination Area Plating Material Finish	Matte
Contact Type	Pin
Contact Mating Area Plating Material	Tin (Sn)
Wire Contact Termination Area Plating Material	Pre-Tin
Contact Retention Within Housing	Without
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	7 A

Termination Features



Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions

Compatible Insulation Diameter Range	3.3 – 5.08 mm[.13 – .2 in]
Wire Size	.5 – 2 mm²

Usage Conditions

Operating Temperature Range	-55 – 120 °C[-67 – 248 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL, VDE
---	--------------

Packaging Features

Packaging Quantity	2500
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 2266669-1
OCEAN_2.0_Applicator-S-090F200F-RSM

TE Part # 90547-1
ASSY PRO-CRIMPER UNIV M-N-L

TE Part # 2266669-2
OCEAN_2.0_Applicator-S-090F200F-RSA

TE Part # 2305570-1
Strip Terminal Cutter-Side Feed-No Crimp

TE Part # 91508-1
CCII UNML UNML II PIN SKT 20-18 ASSY

TE Part # 90547-2
PROCRIMPER DIE ASSY UNIV MNL

TE Part # 7-2266669-7
OCEAN_2.0_SPARE_PART_KIT-090F200F

TE Part # 91506-1
CCII UNML UNML II PIN SKT 16-14 ASSY

Also in the Series | Universal MATE-N-LOK

Circular Power Connectors(2)

Connector Contacts(208)

Connector Hardware(12)

Power Contacts(208)

Rectangular Power Connectors(651)

Standard Circular Connectors(1)



Customers Also Bought

Documents

Product Drawings
UMNL II PIN PHBZ, PRE-TIN

English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_770005-3_AA.2d_dxf.zip

English

Customer View Model
ENG_CVM_CVM_770005-3_AA.3d_igs.zip

English

Customer View Model
ENG_CVM_CVM_770005-3_AA.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.



Datasheets & Catalog Pages

SOFT_SHELL_PIN_SOCKET_CONNECTORS_STANDARD_DENSITY

English

Product Specifications

Application Specification

English