



Connectors > Contacts > Connector Contacts



Contact Type: **Receptacle**

Contact Mating Area Plating Material: **Gold (Au)**

Wire Contact Termination Area Plating Material: **Tin**

Operating Voltage: **250 VDC**

Features

Product Type Features

Discrete Wire Type	Stranded
Sealable	No

Electrical Characteristics

Operating Voltage	250 VDC
-------------------	---------

Contact Features

Contact Underplating Material	Nickel
Contact Orientation	Straight
Contact Underplating Material Thickness	1.27 – 2.54 µm[50 – 100 µin]
Contact Mating Area Plating Material Thickness	.38 µm[15 µin]
Mating Square Post Dimension	.64 mm[.025 in]
Wire Contact Termination Area Plating Material Finish	Bright
Wire Contact Termination Area Plating Thickness	1.27 – 2.54 µm[50 – 100 µin]
Barrel Type	Open
Contact Mating Area Plating Material Finish	Bright
Contact Type	Receptacle



Contact Mating Area Plating Material	Gold (Au)
Wire Contact Termination Area Plating Material	Tin
Contact Retention Within Housing	With
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	5 A

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With
Contact Retention Type Within Housing	Locking Lance

Dimensions

Compatible Insulation Diameter Range	.89 – 1.52 mm[.035 – .06 in]
Wire Size	394.71 – 986.76 CMA

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	VDE
---	-----

Packaging Features

Packaging Method	Reel
------------------	------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC




Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

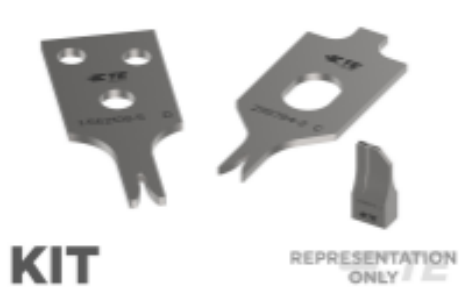

KIT

REPRESENTATION ONLY


TE Part # 7-2151022-7
[OCEAN_2.0_SPARE_PART_KIT-055F070F](#)

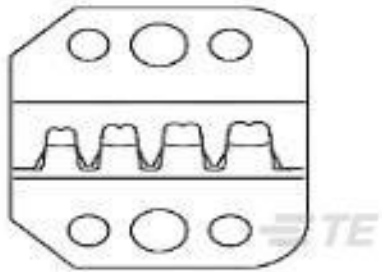

TE Part # 91391-2
[SDE COMM MICRO MNL DIE SET](#)



TE Part # 2151022-1
[OCEAN_2.0_APPLICATOR-S-055F070F-RSM](#)

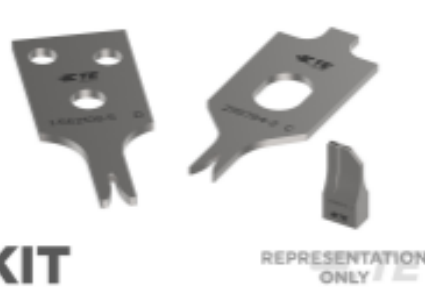

KIT

REPRESENTATION ONLY

TE Part # 7-2837550-7
[OCEAN_2.0_SPARE_PART_KIT-050F070F](#)



TE Part # 2151022-2
[OCEAN_2.0_APPLICATOR-S-055F070F-RSA](#)



TE Part # 2837550-2
[OCEAN_2.0_APPLICATOR-S-050F070F-RSA](#)



TE Part # 2837550-1
[OCEAN_2.0_APPLICATOR-S-050F070F-RSM](#)



TE Part # 843996-6
[TOOL, EXTRACTION RESET](#)



Was called: **SDE PEW 12**

Now renamed to: **SDE SA**
(no other physical changes)

TE Part # 91391-1
[SDE PEW 12MICRO MNL HAND TOOL](#)



TE Part # 91501-1
[CCII MICRO MNL REC 24-20 ASSY](#)

Also in the Series | **Micro MATE-N-LOK**



[Connector Contacts\(27\)](#)



[PCB Headers & Receptacles\(371\)](#)



[Power Contacts\(27\)](#)




[Rectangular Connector Housings\(98\)](#)



[Rectangular Power Connectors\(469\)](#)



[Standard Rectangular Connectors\(98\)](#)

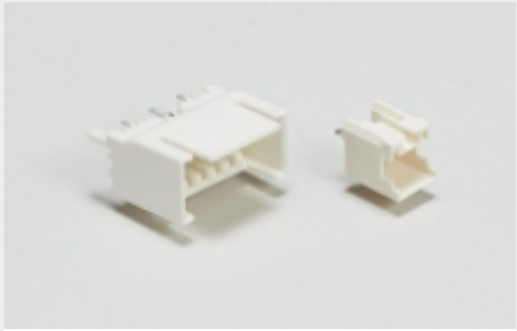

[Wire-to-Board Headers & Receptacles \(371\)](#)


Customers Also Bought




TE Part #794617-2
[2POS,MICRO MNL,RCPT HSG](#)



TE Part #11029805-00
[DT2-028K W/TH LEADS/RIVET](#)

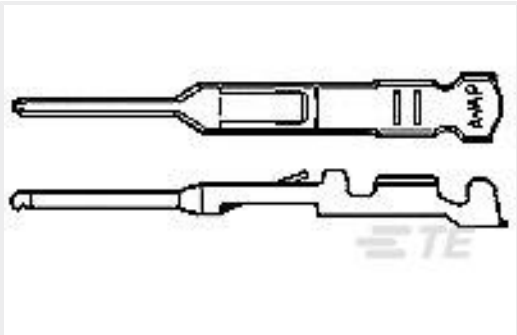

TE Part #170376-3
[EIS CONN. PIN CONTACT](#)

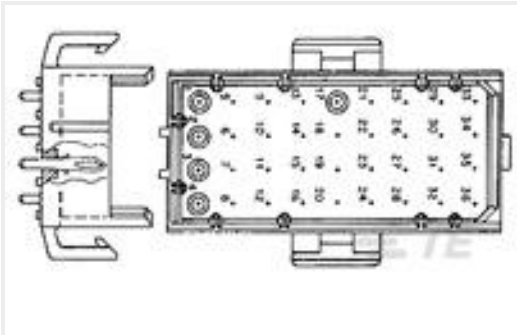

TE Part #640498-4
[03P MR HDR ASSY V0](#)



TE Part #794617-8
[8POS,MICRO MNL,RCPT HSG](#)



TE Part #1879355-4
[RR03 5% 5K6 AMMO](#)




TE Part #1-794615-0
[PANEL MT DBL ROW HSG 10 POS](#)



TE Part #1-794615-4
[PANEL MT DBL ROW HSG 14 POS](#)



TE Part #5-2232263-4
[PTL 1X4 CAP PANEL MT GLW WIRE KEY A DGR](#)

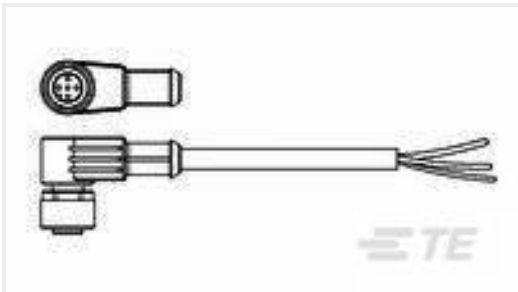

TE Part #1-2273083-3
[M12 x 1.0 angled socket pigt A](#)

Documents



Product Drawings

MICRO MNL RPT CNT STRIP 15AU

English

CAD Files

Customer View Model

ENG_CVM_CVM_794606-2_K.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_794606-2_K.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_794606-2_K.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

MICRO MATE-N-LOK CONNECTOR SYSTEM

English

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English