




Connectors > Contacts > Connector Contacts

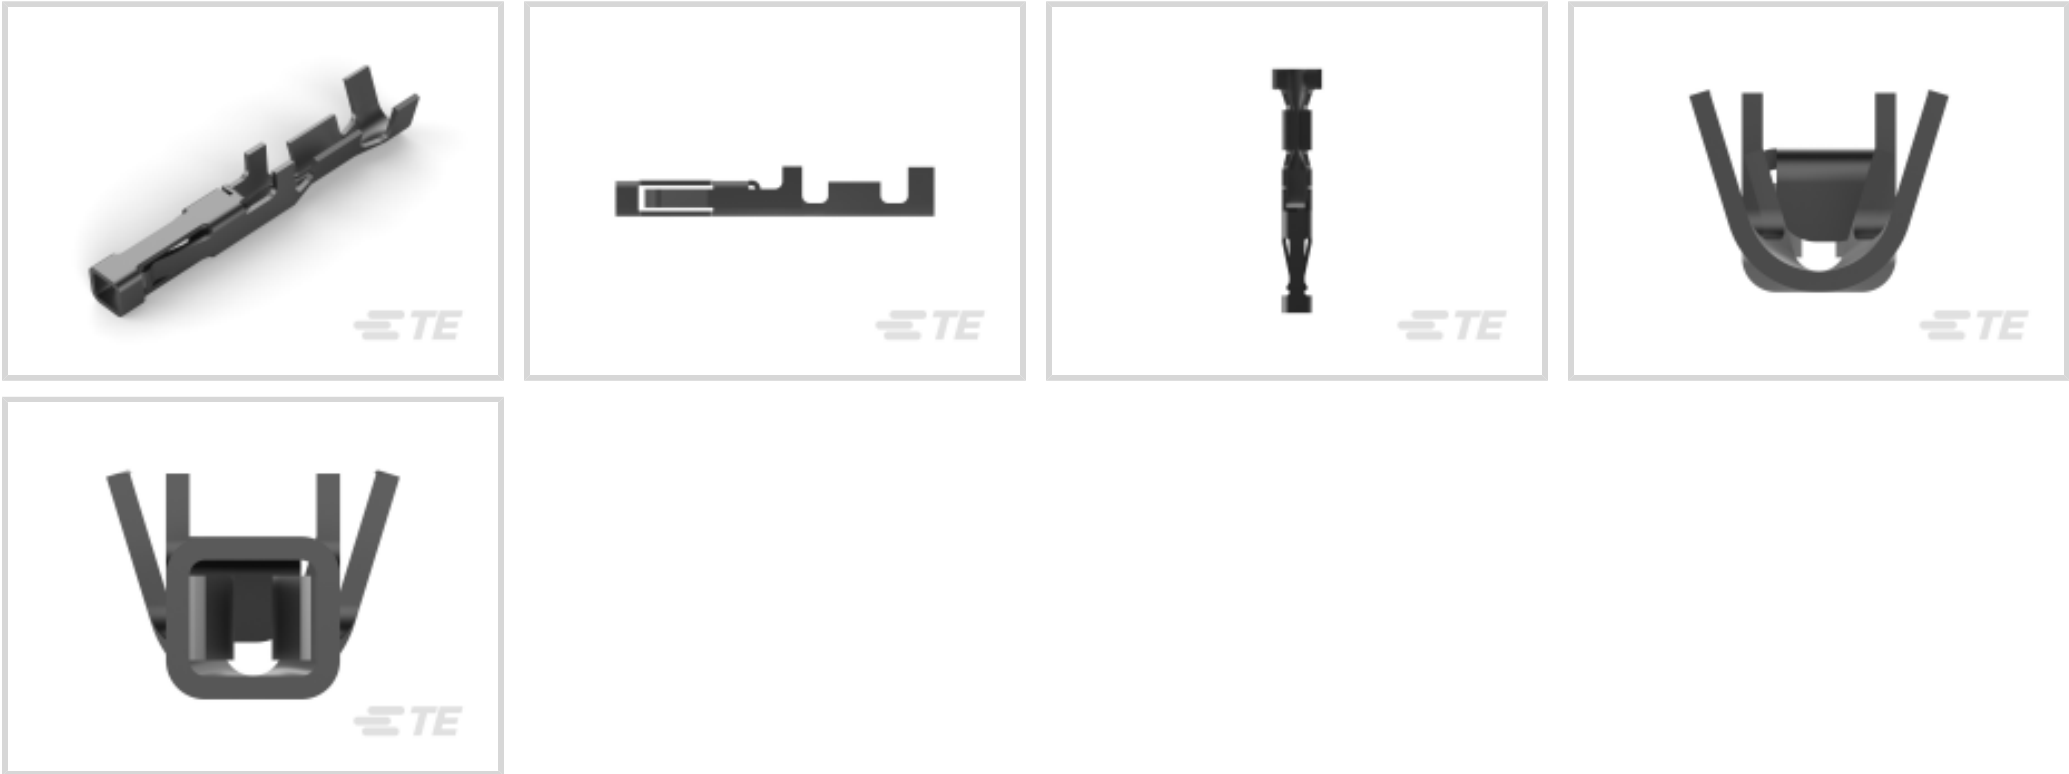

Contact Type: **Receptacle**

Contact Mating Area Plating Material: **Tin (Sn)**

Wire Contact Termination Area Plating Material: **Tin**

Operating Voltage: **250 VDC**

Features

Product Type Features

Discrete Wire Type	Stranded
Sealable	No

Electrical Characteristics

Operating Voltage	250 VDC
-------------------	---------

Contact Features

Contact Orientation	Straight
Contact Mating Area Plating Material Thickness	1.5 – 4 µm[59.05 – 157.48 µin]
Mating Square Post Dimension	.64 mm[.025 in]
Wire Contact Termination Area Plating Material Finish	Bright
Wire Contact Termination Area Plating Thickness	1.5 – 4 µm[59.05 – 157.48 µin]
Barrel Type	Open
Contact Mating Area Plating Material Finish	Bright
Contact Type	Receptacle
Contact Mating Area Plating Material	Tin (Sn)
Wire Contact Termination Area Plating Material	Tin



Contact Retention Within Housing	With
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	5 A

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With
Contact Retention Type Within Housing	Locking Lance

Dimensions

Compatible Insulation Diameter Range	.89 – 1.52 mm[.035 – .06 in]
Wire Size	100 – 254 CMA

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	VDE
---	-----

Packaging Features

Packaging Quantity	15000
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per



homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 843996-6
TOOL, EXTRACTION RESET

TE Part # 91391-1
SDE PEW 12MICRO MNL HAND TOOL

TE Part # 2151142-1
OCEAN_2.0_APPLICATOR-S-042F070F-RSM

TE Part # 7-2151142-7
OCEAN_2.0_SPARE_PART_KIT-042F070F

TE Part # 91391-2
SDE COMM MICRO MNL DIE SET

TE Part # 91502-1
CCII MICRO MNL REC 30-26 ASSY

TE Part # 2425486-1
MICRO MNL BLIND MATE HINGED TPA PLUG 6P

TE Part # 2151142-2
OCEAN_2.0_APPLICATOR-S-042F070F-RSA

Also in the Series | Micro MATE-N-LOK

Connector Contacts(27)

PCB Headers & Receptacles(371)

Power Contacts(27)


Rectangular Connector Housings(98)



Rectangular Power Connectors(469)



Standard Rectangular Connectors(98)

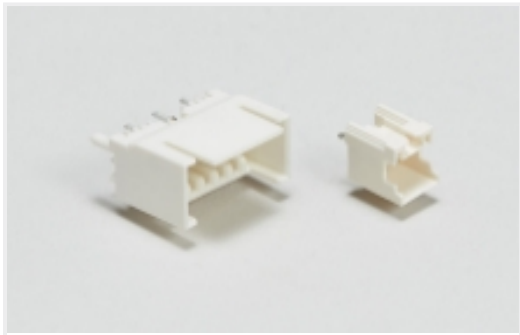

Wire-to-Board Headers & Receptacles (371)

Customers Also Bought



TE Part #925076
4W CIRCULAR MATE-N-LOK SOCKET
HSG NAT




TE Part #794606-1
MICRO MNL RPT CNT STRIP 20-24



TE Part #794617-6
6POS,MICRO MNL,RCPT HSG




TE Part #163301-6
MATENLOK PIN

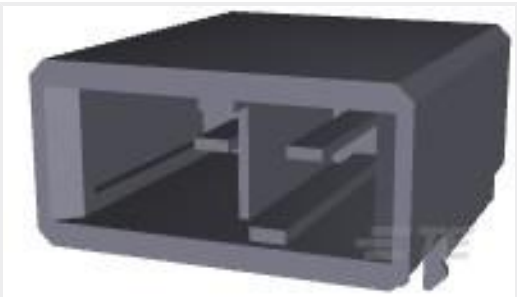

TE Part #1-179276-3
DYNAMIC 3200 HDR ASSY 2P H



TE Part #1-794613-1
PIN CONT 26-30 15 GOLD L/P

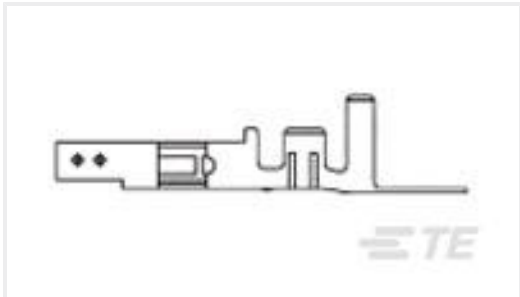

TE Part #1586317-1
VAL-U-LOK SKT BR SN 26-22 LP



TE Part #2-1445050-8
MICRO MNL HDR ASSY S/ROW LF



TE Part #1-794617-0
10POS,MICRO MNL,RCPT HSG



TE Part #794617-4
4POS,MICRO MNL,RCPT HSG

Documents

Product Drawings

MICRO MNL RPT CNT STRIP 26-30

English

CAD Files

Customer View Model

ENG_CVM_794607-1_F.3d_igs.zip

English

Customer View Model



[ENG_CVM_794607-1_F.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_794607-1_F.2d_dxf.zip](#)

English

3D PDF

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_794607-1_J.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_794607-1_J.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_794607-1_J.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG](#)

English

[MICRO MATE-N-LOK CONNECTOR SYSTEM](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL Report](#)

English