




Connectors > Contacts > Connector Contacts

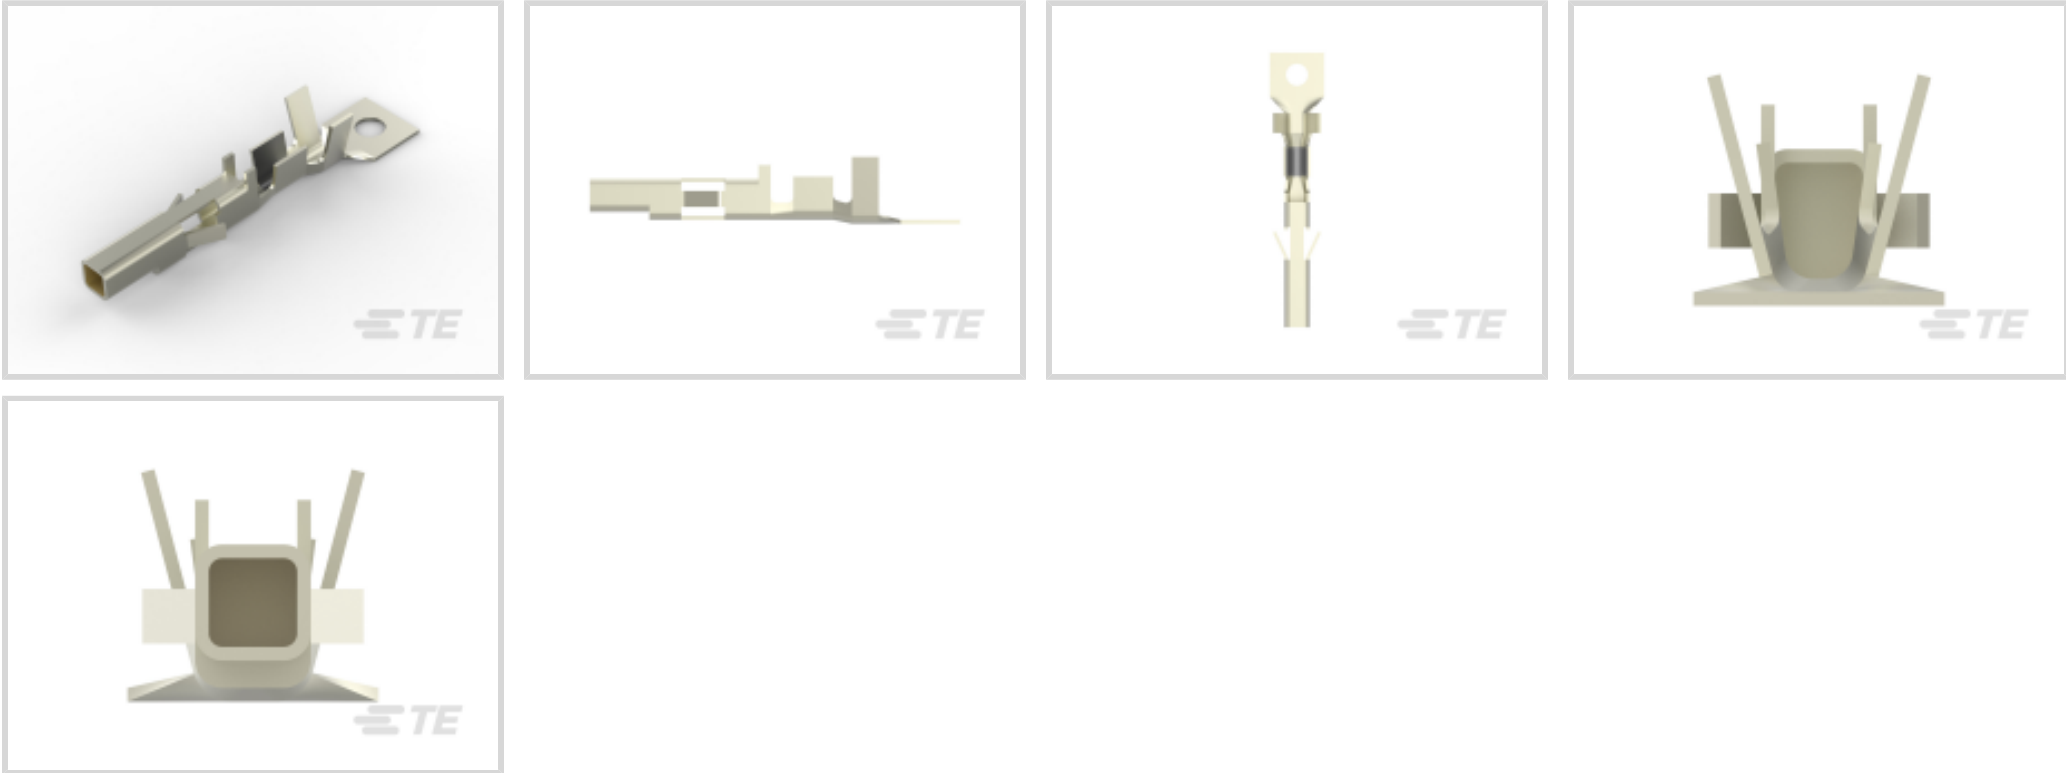

Contact Type: **Socket**

Contact Mating Area Plating Material: **Gold (Au)**

Wire Contact Termination Area Plating Material: **Pre-Tin**

Operating Voltage: **600 VAC**

Contact Retention Within Housing: **With**

Features

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Contact Features

Contact Underplating Material	Nickel
Contact Orientation	Straight
Contact Underplating Material Thickness	1.27 µm[50 µin]
Contact Mating Area Plating Material Thickness	.76 µm[30 µin]
Mating Square Post Dimension	1.14 mm[.045 in]
Wire Contact Termination Area Plating Material Finish	Bright
Contact Shape & Form	Single Beam
Wire Contact Termination Area Plating Thickness	2.54 µm[100 µin]
Contact Type	Socket
Contact Mating Area Plating Material	Gold (Au)
Wire Contact Termination Area Plating Material	Pre-Tin
Contact Retention Within Housing	With
Contact Base Material	Brass



Contact Current Rating (Max)	9 A
------------------------------	-----

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions

Compatible Insulation Diameter Range	1.19 – 1.75 mm[.047 – .069 in]
Wire Size	.13 – .33 mm²

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
---	---------

Packaging Features

Packaging Quantity	5000
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



KIT

REPRESENTATION ONLY

TE Part # 7-2266139-7
[OCEAN_2.0_Spare_Part_Kit-055F070F](#)



TE Part # 2836282-2
[OCEAN_2.0_Applicator-S-055F062F-RSA](#)



TE Part # 2238023-1
[VAL-U-LOK SKT BR SN 26-22 LP](#)



TE Part # 2305570-1
[Strip Terminal Cutter-Side Feed-No Crimp](#)



TE Part # 2836282-1
[OCEAN_2.0_Applicator-S-055F062F-RSM](#)



TE Part # 2266139-1
[OCEAN-2.0-APPLICATOR-S-055F070F-SSM](#)



KIT

REPRESENTATION ONLY

TE Part # 7-2836282-7
[OCEAN_2.0_Spare_Part_Kit-055F062F](#)

Customers Also Bought




TE Part #1-2176326-3
[CRGP 0603 100R 1%](#)



TE Part #CAT-C73765-M1F
[M12 Panel Mount Wire](#)




TE Part #TAD14241311-002
[M12D4-MR-PVC TYPE B RED-1.0M](#)

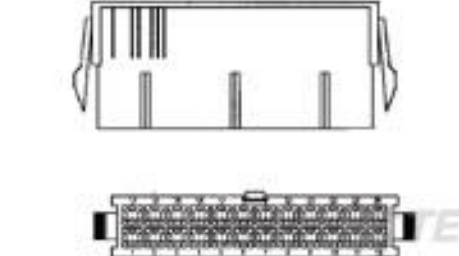

TE Part #1586018-2
[2P PM PLUG VAL-U-LOK V0](#)




TE Part #T4062223004-001
RPC-M8-4MR-0.5SH-M8-4FS-PUR

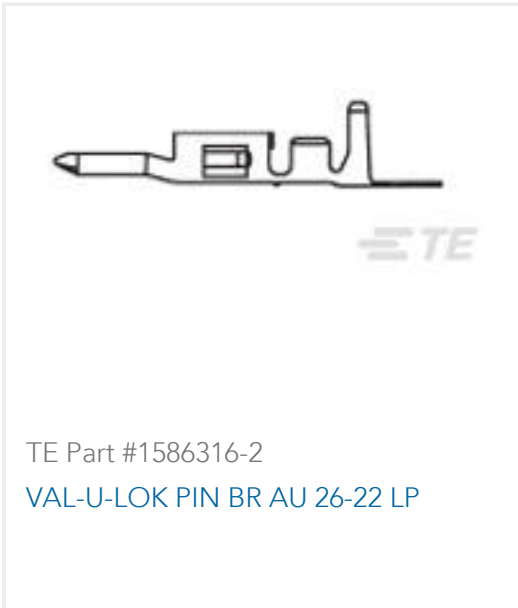


TE Part #1586316-2
VAL-U-LOK PIN BR AU 26-22 LP



TE Part #160293
PLASTI-GRIP, RING, 12-10 5MM

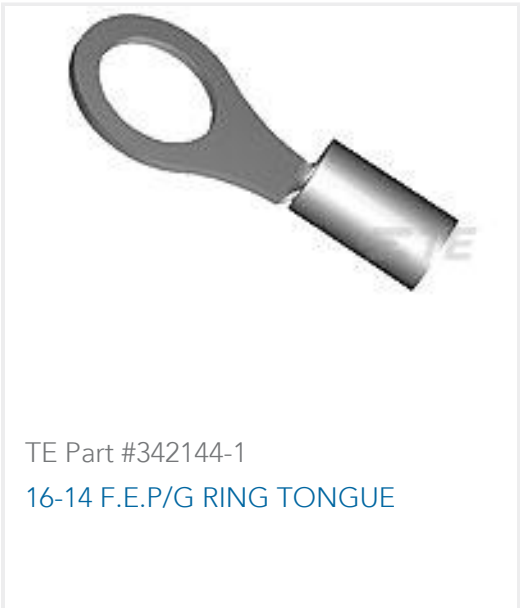

TE Part #342144-1
16-14 F.E.P/G RING TONGUE

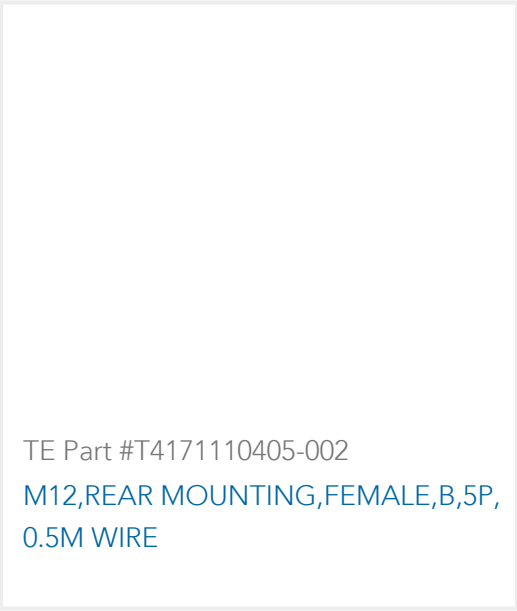

TE Part #T4171110405-002
M12,REAR MOUNTING,FEMALE,B,5P,
0.5M WIRE

Documents

Product Drawings

VAL-U-LOK SKT BR AU 22-26AWG

English

CAD Files

Customer View Model

ENG_CVM_CVM_794958-2_F.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_794958-2_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_794958-2_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

Product Specifications

Application Specification

English

Agency Approvals

CSA Certificate

794958-2

Socket Contact, Gold (Au), 600 VAC, 26 – 22 AWG, .13 – .33 mm² Wire, Crimp, Brass,
Power, -40 – 105 °C [-40 – 221 °F]



English