## FCB-205-HX3 <

### CII

TE Internal #: 8-1617758-9 General Purpose Power Relay, DC, Polarized, Monostable, 2 Form C DPDT-CO, 5 A Contact Rating, 28 VDC Coil Voltage, Panel Mount, Hermetically Sealed

View on TE.com >

Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: General Purpose Power Relay

Current Type: DC

Coil Magnetic System: Polarized, Monostable

Contact Arrangement: 2 Form C DPDT-CO

Contact Current Rating: 5A

### Features

### Product Type Features

Relay & Contactor Type

connectivity

General Purpose Power Relay

### **Configuration Features**

Contact Arrangement	2 Form C DPDT-CO	
Electrical Characteristics		
Coil Resistance	500 Ω	
Contact Current Rating	5 A	
Coil Voltage Rating	28 VDC	
Body Features		
Enclosure Type	Hermetically Sealed	
Contact Features		
Contact Material	Silver Cadmium Oxide	
Terminal Plating	Tin-Lead	
Termination Features		
Main Termination & Connection Type	Solder Hook Terminals	
Coil Termination & Connection Type	Solder Hook Terminals	
Mechanical Attachment		
Product Mounting Feature Type	Mounting Brackets	
	01/11/2025 07.1	

**C** For support call+1 800 522 6752

04/14/2025 07:47PM | Page 1

### FCB-205-HX3

General Purpose Power Relay, DC, Polarized, Monostable, 2 Form C DPDT-CO, 5 A Contact Rating, 28 VDC Coil Voltage, Panel Mount, Hermetically Sealed



Product Mount Type	Panel Mount
Usage Conditions	
Operating Temperature Range	-70 – 125 °C[-94 – 257 °F]
Environmental Ambient Temperature (Max)	125 °C[257 °F]
Operation/Application	
Vibration Resistance	30G's, 70 – 3000Hz
Shock Resistance	200G's, 6ms
Current Type	DC
Coil Magnetic System	Polarized, Monostable
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025

### Halogen Content

Solder Process Capability

### (247)

SVHC > Threshold:

Cadmium oxide (10% in Component Part)

#### Article Safe Usage Statements:

Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Yet Reviewed for halogen content

Not lead free process capable

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

### FCB-205-HX3


General Purpose Power Relay, DC, Polarized, Monostable, 2 Form C DPDT-CO, 5 A Contact Rating, 28 VDC Coil Voltage, Panel Mount, Hermetically Sealed




**Compatible Parts** 



# Customers Also Bought

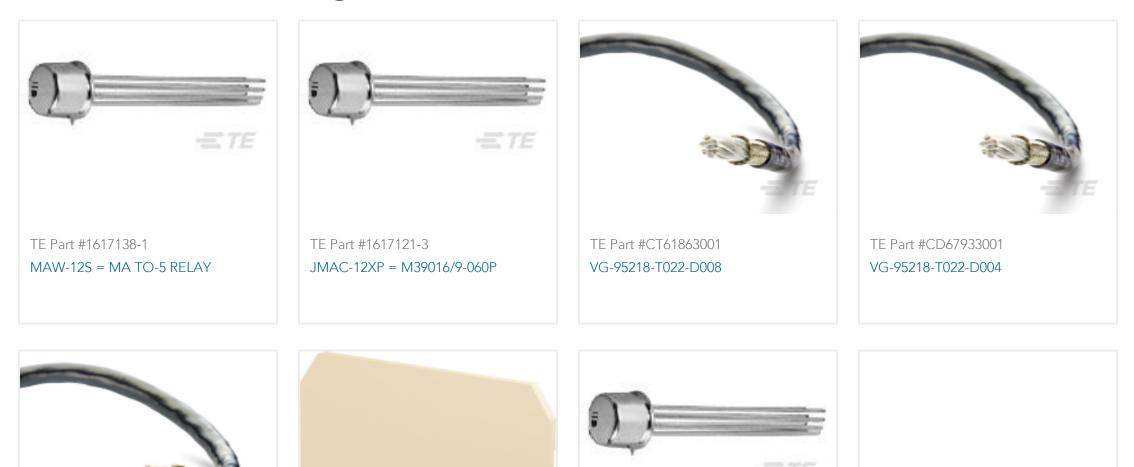

	TE	- <b>=</b> TE		
TE Part #CQ71133001 VG-95218-T022-D005	TE Part #1SNA198692R25 SCH3	500 TE Part #1-1617138-1 MAW-26S2 = MA T05 RELA	TE Part #E077813	

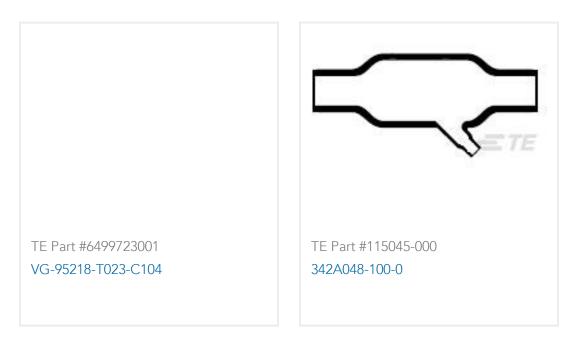

## Documents

Product Drawings

FCB-205-HX3

English

**CAD** Files

3D PDF

3D

### FCB-205-HX3

General Purpose Power Relay, DC, Polarized, Monostable, 2 Form C DPDT-CO, 5 A Contact Rating, 28 VDC Coil Voltage, Panel Mount, Hermetically Sealed



Customer View Model ENG\_CVM\_CVM\_8-1617758-9\_C.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_8-1617758-9\_C.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_8-1617758-9\_C.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 5-1773450-5\_sec5\_FCB-205

English