

TE Internal #: 8-36964-1 Closed End Splice, 22 – 14 AWG, .3 – 2 mm² Wire, .509 – 5.18 kcmil, 509 – 5180 CMA, Copper, Purple, 21.21 mm [.835 in] Length, Loose Piece

View on TE.com >

Terminals & Splices > Splices



Splice Type: Closed End Splice

Wire Size: .3 – 2 mm²

Sealable: No

Compatible Insulation Diameter Range: 4.75 mm [.187 in]

Features

Product Type Features



Splice Accessory Type	Splice
Splice Type	Closed End Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Body Features	
Product Weight	.567 g
Primary Product Color	Purple
Contact Features	
Terminal Plating Material	Tin
Contact Base Material	Copper
Barrel Type	Closed
Mechanical Attachment	

C For support call+1 800 522 6752

8-36964-1

Closed End Splice, 22 – 14 AWG, .3 – 2 mm² Wire, .509 – 5.18 kcmil, 509 – 5180 CMA, Copper, Purple, 21.21 mm [.835 in] Length, Loose Piece



Wire Insulation Support	With
Dimensions	
Wire Size	.509 – 5.18 kcmil
Compatible Insulation Diameter Range	4.75 mm[.187 in]
Terminal Material Thickness	.69 mm[.027 in]
Product Length	21.21 mm[.835 in]
Jsage Conditions	
Insulation Option	Fully Insulated
Operation/Application	
Compatible With Wire Base Material	Copper
dentification Marking	
Splice Marking	VS
ndustry Standards	
Government Qualified Splice	No
Packaging Features	
Packaging Quantity	100
Packaging Method	Loose Piece



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as

8-36964-1

Closed End Splice, 22 – 14 AWG, .3 – 2 mm² Wire, .509 – 5.18 kcmil, 509 – 5180 CMA, Copper, Purple, 21.21 mm [.835 in] Length, Loose Piece




EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Customers Also Bought

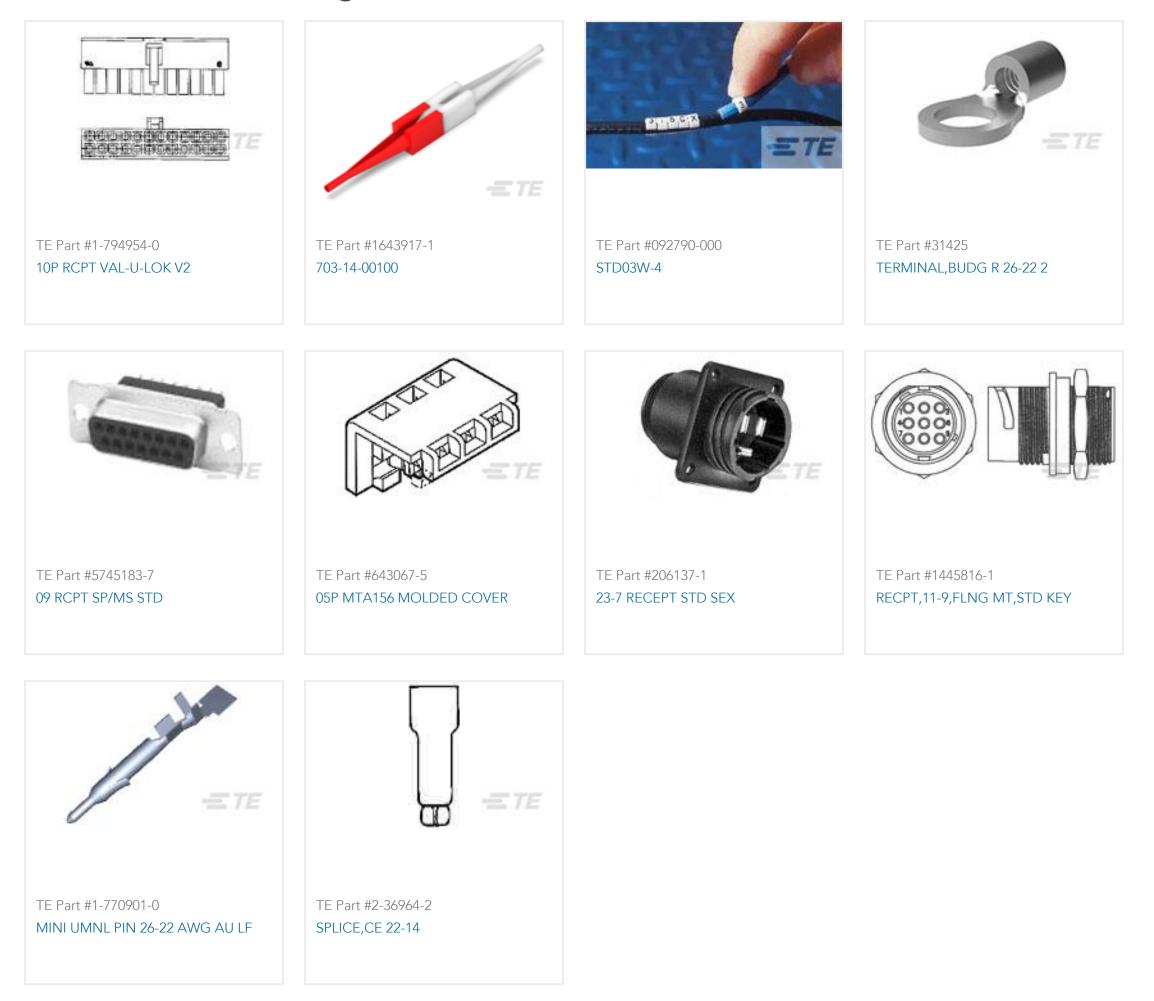

8-36964-1

Closed End Splice, 22 – 14 AWG, .3 – 2 mm² Wire, .509 – 5.18 kcmil, 509 – 5180 CMA, Copper, Purple, 21.21 mm [.835 in] Length, Loose Piece



Documents

Product Drawings SPLICE, CE 22-14

English

CAD Files

Customer View Model ENG_CVM_CVM_8-36964-1_W.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_8-36964-1_W.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_8-36964-1_W.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Instruction Sheets Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

English

UL Report

English