8-5353164-6 - ACTIVE

TE Internal #: 8-5353164-6 PCB Mount Header, Vertical, Board-to-Board, 80 Position, .5 mm [. 02 in] Centerline, Gold (Au), Surface Mount, Signal, Black, Tape & Reel

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Type: PCB Mount Header

PCB Mount Orientation: Vertical

Connector System: Board-to-Board

Number of Positions: 80

Centerline (Pitch): .5 mm [.02 in]

Features

Product Type Features



PCB Connector Type	PCB Mount Header
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly
Configuration Features	
Board-to-Board Configuration	Parallel
Stackable	Yes
PCB Mount Orientation	Vertical
Number of Positions	80
Electrical Characteristics	
Operating Voltage	250 VAC
Insulation Resistance	2 ΜΩ
Dielectric Withstanding Voltage (Max)	500 VAC

PCB Mount Header, Vertical, Board-to-Board, 80 Position, .5 mm [.02 in] Centerline, Gold (Au), Surface Mount, Signal, Black, Tape & Reel



Body Features

Primary Product Color	Black
Contact Features	
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Mating Tab Width	.15 mm[.006 in]
PCB Contact Termination Area Plating Material Thickness	.05 μm[2 μin]
Contact Layout	Inline
Contact Base Material	Copper Alloy
Mating Tab Thickness	.2 mm[.008 in]
PCB Contact Termination Area Plating Material	Gold
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Tab
Contact Current Rating (Max)	.3 A
Termination Features	
Rectangular Termination Post & Tail Width	.6 mm[.024 in]
Rectangular Termination Post & Tail Thickness	.2 mm[.008 in]
Termination Method to PCB	Surface Mount

Mechanical Attachment

Mating Alignment Type	None
PCB Mount Retention Type	None
PCB Mount Alignment Type	None
PCB Mount Retention	Without
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount
Mating Alignment	Without
Housing Features	
Housing Material	LCP
Centerline (Pitch)	.5 mm[.02 in]
Dimensions	
Stack Height	1.5 mm[.059 in]
Usage Conditions	
Housing Temperature Rating	High

PCB Mount Header, Vertical, Board-to-Board, 80 Position, .5 mm [.02 in] Centerline, Gold (Au), Surface Mount, Signal, Black, Tape & Reel



Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
Operation/Application	
Assembly Process Feature	Pick and Place Cover
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	1500
Packaging Method	Tape & Reel
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247)

(247) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Reflow solder capable to 245°C

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

PCB Mount Header, Vertical, Board-to-Board, 80 Position, .5 mm [.02 in] Centerline, Gold (Au), Surface Mount, Signal, Black, Tape & Reel





Customers Also Bought

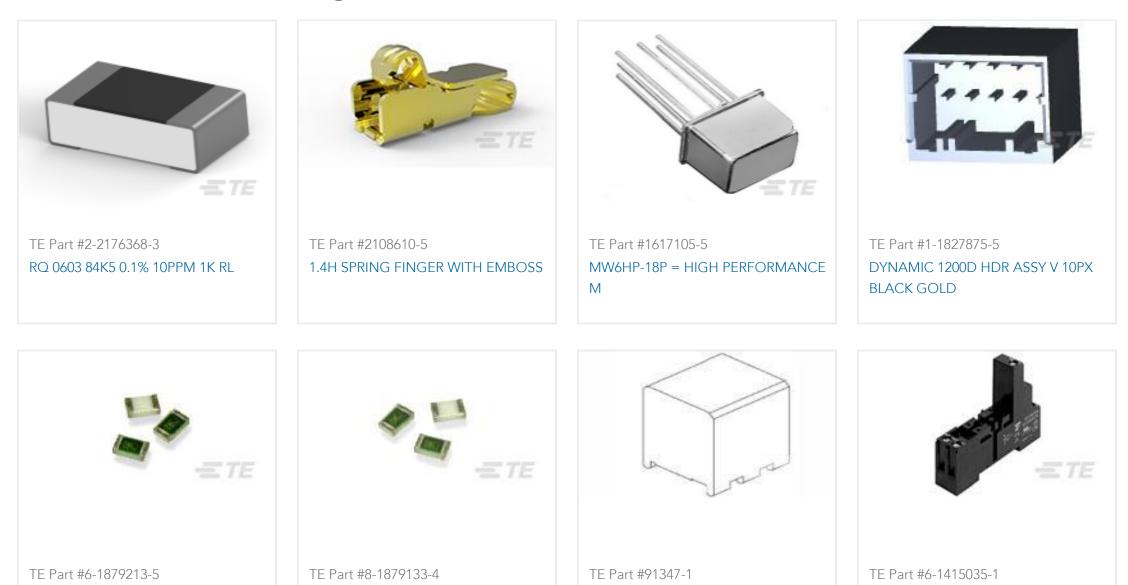

RT78726



Documents

CAD Files

Customer View Model

ENG_CVM_CVM_8-5353164-6_C.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_8-5353164-6_C.3d_igs.zip

English

PCB Mount Header, Vertical, Board-to-Board, 80 Position, .5 mm [.02 in] Centerline, Gold (Au), Surface Mount, Signal, Black, Tape & Reel



Customer View Model

ENG_CVM_CVM_8-5353164-6_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Product Specification

English

Instruction Sheets

0.5MM F-S CONNECTOR(H 1.5MM) (BOARD TO BOARD SMT TYPE) HANDLING AND OPERATION INSTRUCTION SHEET

English

Instruction Sheet (non U.S.)

English