




Connectors > PCB Connectors > PCB Headers & Receptacles

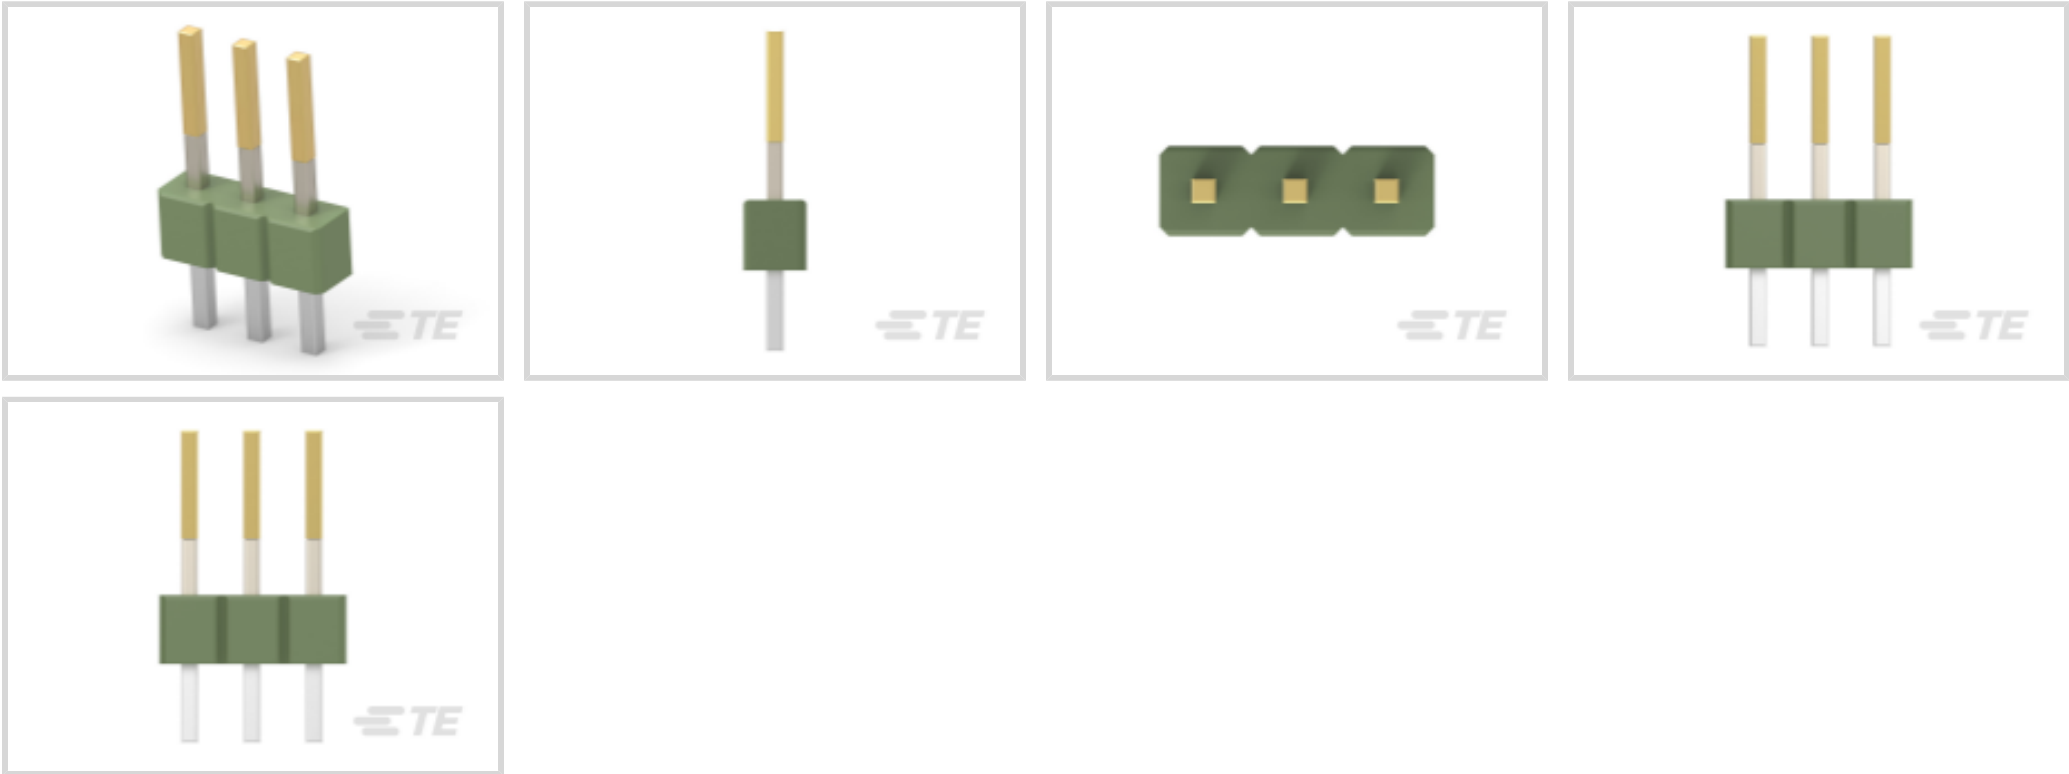

PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Board-to-Board**

Number of Positions: **3**

Number of Rows: **1**

Features

Product Type Features

PCB Connector Type	PCB Mount Header
Connector System	Board-to-Board
Header Type	Breakaway
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Connector Contact Load Condition	Fully Loaded
Board-to-Board Configuration	Parallel
PCB Mount Orientation	Vertical
Number of Positions	3
Number of Rows	1

Electrical Characteristics

Insulation Resistance	5000 MΩ
-----------------------	---------



Dielectric Withstanding Voltage (Max)

750 Vrms

Body Features

Primary Product Color

Green

Contact Features

Contact Underplating Material

Nickel

Contact Underplating Material Thickness

1.27 μm[50 μin]

Contact Mating Area Plating Material Thickness

.76 μm[30 μin]

Mating Square Post Dimension

.63 mm[.025 in]

PCB Contact Termination Area Plating Material Thickness

3 μm[118 μin]

Contact Shape & Form

Square

Contact Layout

Inline

Contact Mating Area Length

6.7 mm[.264 in]

Contact Base Material

Copper Alloy

PCB Contact Termination Area Plating Material

Tin

Contact Mating Area Plating Material

Gold (Au), Gold Flash

Contact Type

Pin

Contact Current Rating (Max)

5 A

Termination Features

Termination Post & Tail Length

3.2 mm[.126 in]

Square Termination Post & Tail Dimension

.63 mm[.025 in]

Termination Method to PCB

Through Hole - Solder

Mechanical Attachment

PCB Mount Retention

Without

PCB Mount Alignment

Without

Connector Mounting Type

Board Mount

Mating Alignment

Without

Housing Features

Housing Material

PBT

Centerline (Pitch)

2.54 mm[.1 in]

Dimensions

PCB Thickness (Recommended)

1.57 mm[.062 in]

Usage Conditions



Housing Temperature Rating	Standard
Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	2000
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 215297-3
3P HV100 REC CON. TE, 7.0MM

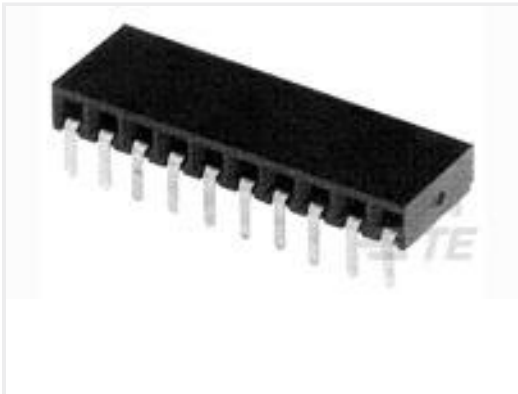

TE Part # 216602-3
HV190 REC ASSY 1X 3P




TE Part # 215299-3
3P HV100 REC CON. TE, 8.5MM



TE Part # 925366-3
MOD 4 REC.HSG 1X03P



TE Part # 1241152-3
3P HV100 REC. CON, SMD, GOLD, BLISTER

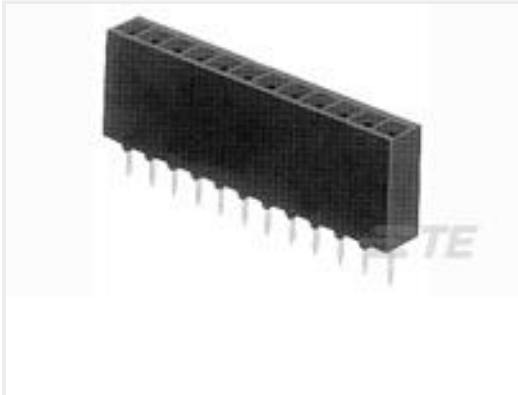


TE Part # 829265-3
3P HV100 REC.CON. B/TE,6.2,NO KINK

Also in the Series | AMPMODU Headers



Automotive Headers(1)

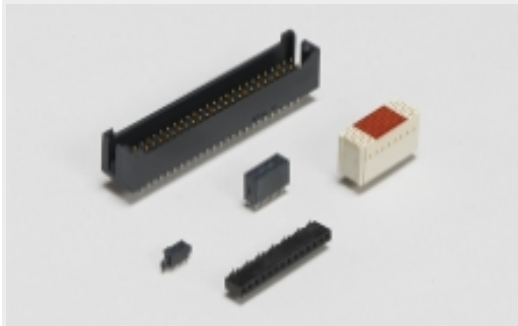


Board-to-Board Headers & Receptacles(1576)



Connector Contacts(47)



Connector Hardware(1)

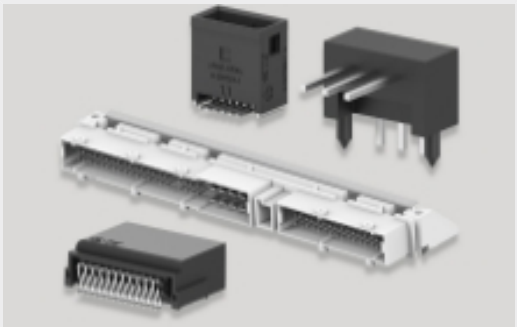


PCB Headers & Receptacles(1621)



Rectangular Power Connectors(43)



Wire-to-Board Connector Assemblies & Housings(5)

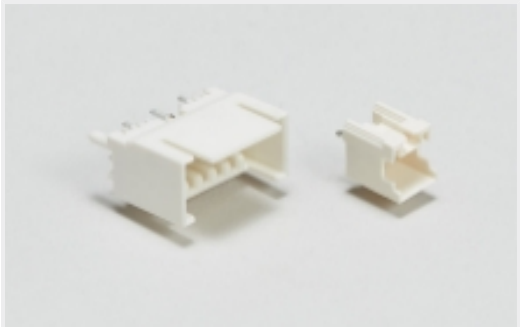


Wire-to-Board Headers & Receptacles (114)

Customers Also Bought



TE Part #3-794677-6
6POS MICRO MNL ASSY,R/A,THRU

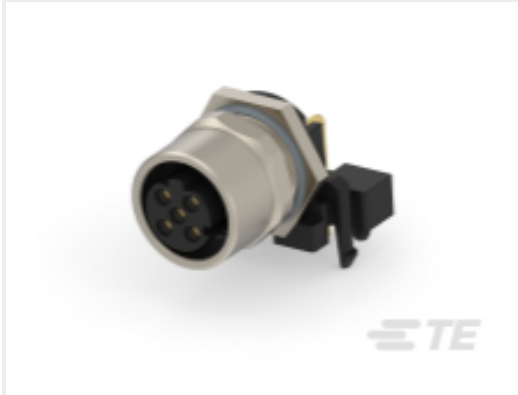

TE Part #T4145515041-001
M12 R/A F PNLREAR STAMPED PIN D-CODE 4P



TE Part #1-826632-2
12P AMPMODU II PIN HDR



TE Part #188753-4
31P.IEC-F MALE CONN



TE Part #2-1614890-0
CPF 0805 8R45 0.1% 25PPM 1K RL

TE Part #1-1623747-2
ER74 220R 1% AMMO PK

TE Part #1-1879927-6
EP 7W 1K5 5%

TE Part #826629-8
AMPMODU II HEADER

TE Part #826631-5
5P AMPMODU II STIFT LEI

TE Part #826632-4
4P AMPMODU II PIN HDR.

Documents

Product Drawings

3P AMPMODU II

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_826629-3_R.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_826629-3_R.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_826629-3_R.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Agency Approvals

UL Report

English