# 861253-1 ~ ACTIVE

# LGH

TE Internal #: 861253-1 Lead Assembly, 15000 VDC, Wire-to-Panel, Wire & Cable, Receptacle, Socket, Panel Mount, -55 – 125 °C [-67 – 257 °F], Package

#### View on TE.com >



Connectors > Power Connectors > Circular Power > Circular Power Connectors



### Connector Product Type: Lead Assembly

Operating Voltage: 15000 VDC

Connector System: Wire-to-Panel

Sealable: No

Connector & Contact Terminates To: Wire & Cable

# Features

### Product Type Features

Connector Seal & Plug Type

Connector Product Type

Connector System

Hermetically Sealed

Lead Assembly

Wire-to-Panel

Sealable	No
Connector & Contact Terminates To	Wire & Cable
Connector & Housing Type	Receptacle
Electrical Characteristics	
Operating Voltage	15000 VDC
Body Features	
Product Weight	3 g[.09 oz]
Positive Stop Ferrule	Without
Contact Features	
Contact Type	Socket
Contact Protection	Without
Mechanical Attachment	
Panel Mount Feature Type	Flange
Mating Alignment	With
Connector Mounting Type	Panel Mount

**C** For support call+1 800 522 6752

# 861253-1

Lead Assembly, 15000 VDC, Wire-to-Panel, Wire & Cable, Receptacle, Socket, Panel Mount, -55 – 125 °C [-67 – 257 °F], Package



#### Dimensions

Assembly Length	24.96 mm[.983 in]
Usage Conditions	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Shielded	No
Packaging Features	
Packaging Quantity	40
Packaging Method	Package
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025

# (247)

SVHC > Threshold:

Pb (13% in 4690948374)

#### Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Halogen Content

Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## 861253-1

Lead Assembly, 15000 VDC, Wire-to-Panel, Wire & Cable, Receptacle, Socket, Panel Mount, -55 – 125 °C [-67 – 257 °F], Package



# Customers Also Bought

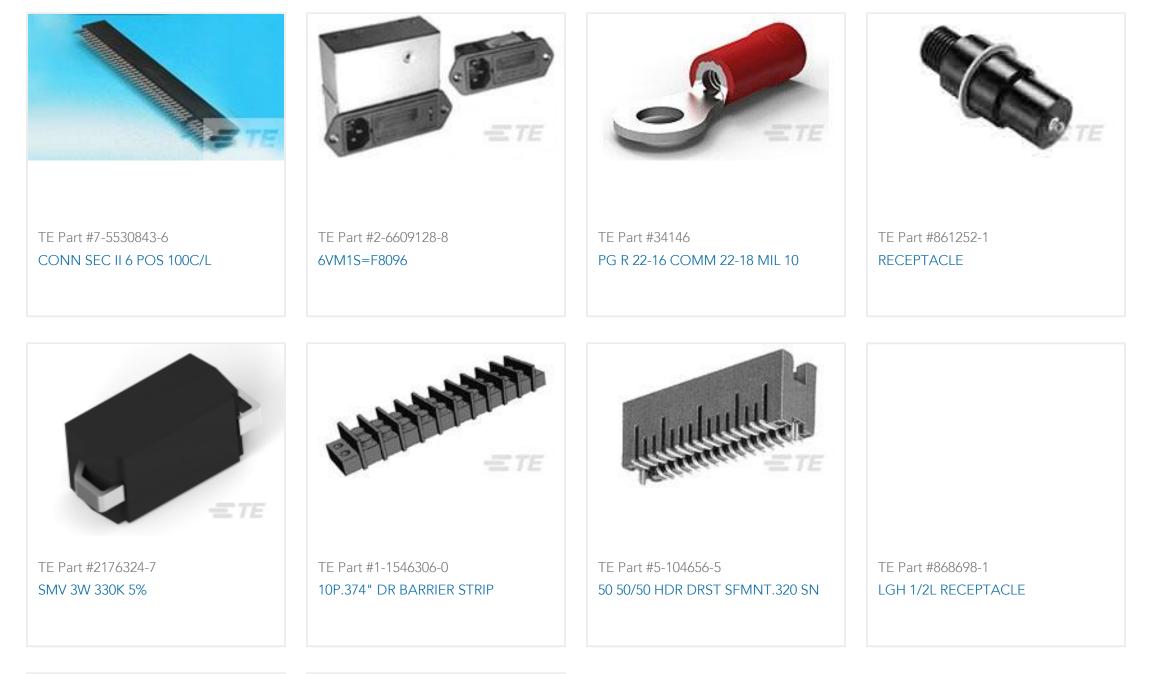



TE Part #38946-20L

TE Part #4162-202-1631L

CONT SOC ASSY

CONT SOC ASSY

# Documents

Product Drawings RECEPTACLE

English

**CAD** Files

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_861253-1\_AL.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_861253-1\_AL.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_861253-1\_AL.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**C** For support call+1 800 522 6752

# 861253-1

Lead Assembly, 15000 VDC, Wire-to-Panel, Wire & Cable, Receptacle, Socket, Panel Mount, -55 – 125 °C [-67 – 257 °F], Package



Datasheets & Catalog Pages 1654742\_HOUSEHOLD\_APPLIANCES\_RAST5

English