

# Potter & Brumfield | Potter & Brumfield SSRK

TE Internal #: 9-1393030-1

AC Input Solid State Relay, 1 Form A SPST-NO, 90 – 280 VAC Input, 24 – 240 Vrms Output, 30 A Contact Rating, AC Output, DIN Rail,

Black

View on TE.com >



Relays & Contactors > Solid State Relays > P&B Solid State Relays, SSRK Series











Input Current Type: AC

Contact Arrangement: 1 Form A SPST-NO

Input Voltage: 90 – 280 VAC

Output Voltage Rating: 24 – 240 Vrms

Output Switching: Zero

All P&B Solid State Relays, SSRK Series (10)

# **Features**

### **Configuration Features**

Relay Options	Integral Heatsink
Contact Arrangement	1 Form A SPST-NO

#### **Electrical Characteristics**

Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms
Input Voltage	90 – 280 VAC
Output Voltage Rating	24 – 240 Vrms
Contact Current Rating	30 A

# **Body Features**

Primary Product Color	Black
Product Weight	280 g[9.87 oz]

#### **Termination Features**

Relay Connection Type Terminals
---------------------------------



	$\sim$ $\sim$ $\sim$ $\sim$ $\sim$
Terminal Configuration	Screw Lerminals
of the state of th	

#### Mechanical Attachment

Product Mounting Feature Type	Mounting Hole
Product Mount Type	DIN Rail

#### **Dimensions**

Product Length	82.3 mm[3.24 in]
Product Width	22.5 mm[.885 in]
Product Height	111.5 mm[4.38 in]

### **Usage Conditions**

Operating Temperature Range	-30 - 80 °C[-22 - 176 °F]

# Operation/Application

Input Current Type	AC
Output Switching	Zero
Output Current Type	AC

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability


### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits



as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# Also in the Series | Potter & Brumfield SSRK

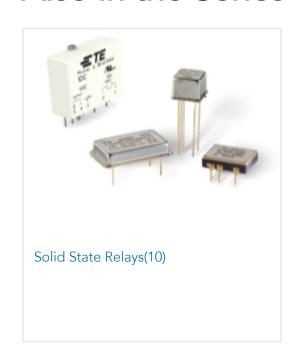

# Customers Also Bought

















### **Documents**

#### **CAD Files**

**Customer View Model** 

ENG\_CVM\_CVM\_9-1393030-1\_A2.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_9-1393030-1\_A2.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_9-1393030-1\_A2.3d\_stp.zip

English

AC Input Solid State Relay, 1 Form A SPST-NO, 90 – 280 VAC Input, 24 – 240 Vrms Output, 30 A Contact Rating, AC Output, DIN Rail, Black



3D PDF

3D

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

# Datasheets & Catalog Pages

Potter & Brumfield SSRK SSRM Series

English

SSRK\_Datasheet

English

Agency Approvals

UL

English