

PRD-3DY0-110

✓ ACTIVE

TE Internal #: 9-1393127-4

General Purpose Power Relay, DC, Monostable, 1 Form X SPST-NO-DM, 25 A Contact Rating, 110 VDC Coil Voltage, 600 VAC Contact Voltage

[View on TE.com >](#)



Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: **General Purpose Power Relay**

Current Type: **DC**

Coil Magnetic System: **Monostable**

Contact Arrangement: **1 Form X SPST-NO-DM**

Contact Current Rating: **25 A**

Features

Product Type Features

Relay & Contactor Type	General Purpose Power Relay
------------------------	-----------------------------

Configuration Features

Contact Number of Poles	2
Contact Arrangement	1 Form X SPST-NO-DM

Electrical Characteristics

Coil Resistance	6050 Ω
Contact Switching Voltage (Max)	600 VAC
Contact Current Rating	25 A
Coil Voltage Rating	110 VDC
Contact Voltage Rating	125 VDC
Coil Power Rating DC	2 W
Insulation Initial Dielectric Between Contacts & Coil	2000 Vrms

Termination Features

Main Termination & Connection Type	8-32 Screw
Coil Termination & Connection Type	6-32 Screw

Mechanical Attachment

Product Mount Type	Panel Mount
--------------------	-------------

Dimensions

--	--



Product Width	63.8 mm
Product Length	63.3 mm
Product Height	63.5 mm

Usage Conditions

Operating Temperature Range	-55 – 80 °C[-67 – 176 °F]
Environmental Ambient Temperature (Max)	80 °C[176 °F]

Operation/Application

Current Type	DC
Coil Magnetic System	Monostable

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Customers Also Bought

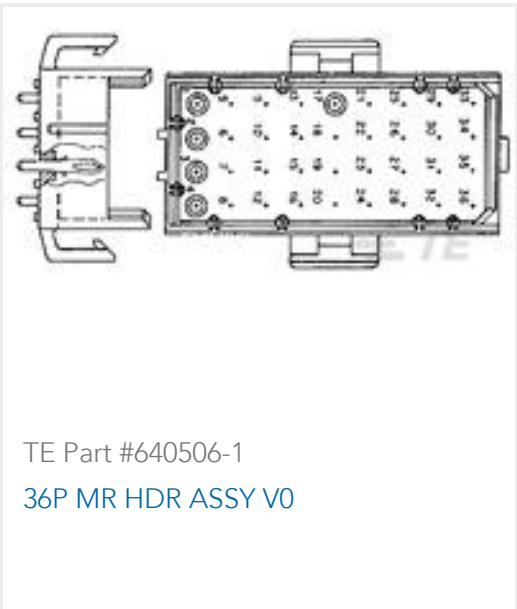

Documents

CAD Files

3D PDF

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_9-1393127-4\\_B.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_9-1393127-4\\_B.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_9-1393127-4\\_B.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[PRD 10 to 50 Amp Heavy Duty AC or DC Power Relay](#)

English



Product Specifications

Definitions General Purpose Relays

English

Agency Approvals

UL

English