AMP | BNC

TE Internal #: 9-331350-3

TE Internal Description: BNC PLUG PTFE

View on TE.com >



Connectors > RF Connectors > Coax Connectors



RF Interface: BNC

RF Connector Style: Plug

RF Connector Mated Outer Diameter (Approximate): 14.53 mm [.572 in]

Impedance: 50Ω

Compatible With RF Cable Type: RG 179, RG 187

Features

Product Type Features

Connector Seal & Plug Type	Interfacial Seal
RF Interface	BNC
RF Connector Style	Plug
Compatible With RF Cable Type	RG 179, RG 187
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	1

Electrical Characteristics

Number of Coaxial Contacts

Impedance	50 Ω	

Body Features

Cable Connector Orientation Str	raight
Body Material Bra	ass
Body Material Finish Pla	ated
Body Plating Material Silv	lver

Contact Features

Crimp Type	Dual Crimp
RF Connector Center Contact Underplating Material	Nickel



RF Connector Center Contact Plating Material	Gold (Au)
RF Connector Center Contact Material	Brass
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
RF Connector Coupling Mechanism	Bayonet
RF Contact Captivation Method	Mechanical
Dimensions	
RF Connector Mated Outer Diameter (Approximate)	14.53 mm[.572 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-65 – 165 °C[-85 – 329 °F]
Operation/Application	
Operating Frequency	4 GHz
Packaging Features	
Packaging Method	Package
Other	
Coupling Nut Base Material	Brass
Grade	Military

Product Compliance

Dielectric Material

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Pb (4% in Contact/Component) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

PTFE



Halogen Content	Low Bromine/Chlorine - Br and Cl < 900
	ppm per homogenous material. Also BFR
	/CFR/PVC Free


Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Also in the Series | BNC

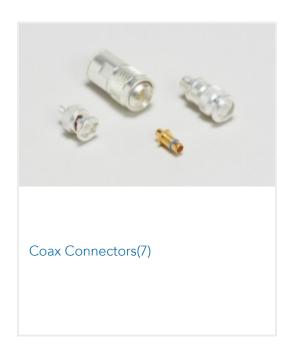

Customers Also Bought



Documents

CAD Files

Customer View Model ENG_CVM_CVM_9-331350-3_BR.2d_dxf.zip

English

3D PDF

3D



Customer View Model

ENG_CVM_CVM_9-331350-3_BR.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_9-331350-3_BR.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Instruction Sheets

COAXICON 50-Ohm RF Series BNC Plug Connectors 225395-(), 225886-(), and 331350-()

English

Instruction Sheet (U.S.)

English