


TE Internal #: 925552-1 Pin, 2.92 mm [.115 in] Pin Diameter, 20 – 17 AWG, .5 – 1 mm² Wire, 1021 – 2048 CMA, Open Barrel, Unplated Plating, 10.9 mm [.43 in] Length, Reel

View on TE.com >

connectivity

Terminals & Splices > Crimp Wire Pins, Tabs & Ferrules

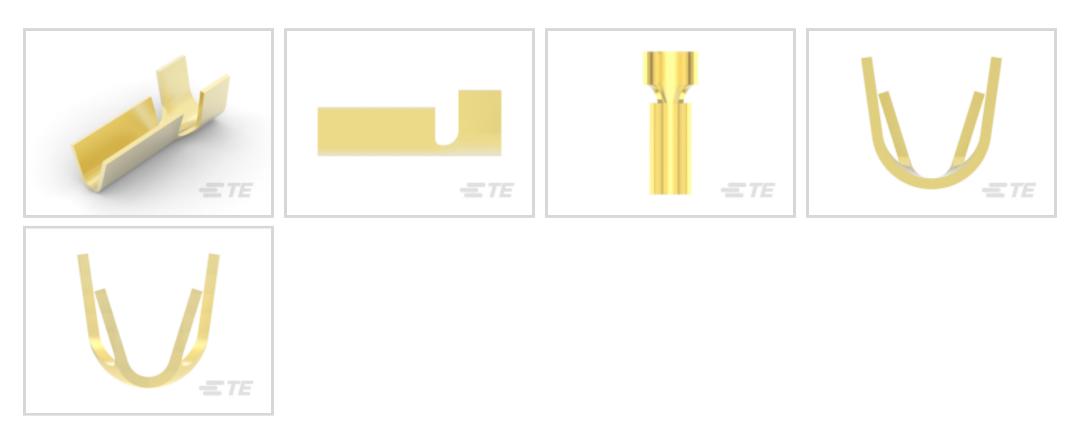

Crimp Wire Terminal Type: Pin

Mating Pin Diameter: 2.92 mm [.115 in]

Compatible Insulation Diameter Range: 3.3 mm, 1.8 – 3.3 mm [.13 in, .071 – .13 in]

Wire Size: .5 – 1 mm²

Features

Product Type Features

Compatible With Discrete Wire Type	Stranded
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Contact Features	
Crimp Wire Terminal Type	Pin
Mating Pin Diameter	2.92 mm[.115 in]
Barrel Type	Open
Terminal Plating Material	Unplated
Terminal Orientation	Straight
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Compatible Insulation Diameter Range	3.3 mm, 1.8 – 3.3 mm[.13 in][.071 – .13 in]
Wire Size	1021 – 2048 CMA

925552-1

Pin, 2.92 mm [.115 in] Pin Diameter, 20 – 17 AWG, .5 – 1 mm² Wire, 1021 – 2048 CMA, Open Barrel, Unplated Plating, 10.9 mm [.43 in] Length, Reel



Barrel Inside Diameter	1.27 mm[.05 in]
Terminal Material Thickness	.33 mm[.013 in]
Overall Product Length	10.9 mm[.43 in]
Usage Conditions	
Insulation Option	Uninsulated
Packaging Features	
Packaging Quantity	20000
Packaging Method	Reel
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Not applicable for solder process capability

Solder Process Capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

925552-1

Pin, 2.92 mm [.115 in] Pin Diameter, 20 – 17 AWG, .5 – 1 mm² Wire, 1021 – 2048 CMA, Open Barrel, Unplated Plating, 10.9 mm [.43 in] Length, Reel



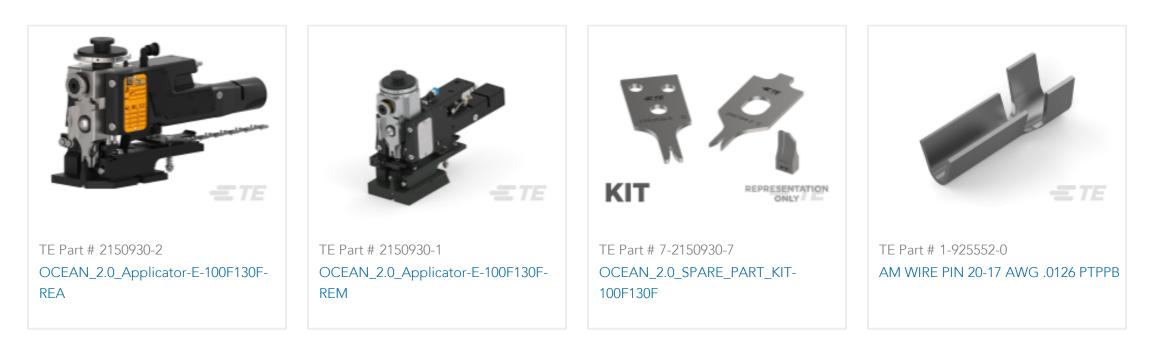



Customers Also Bought



110 FASTON REC 22-18 AWG TPBR

8P.374" DR BARRIER STRIP





Documents

925552-1

Pin, 2.92 mm [.115 in] Pin Diameter, 20 – 17 AWG, .5 – 1 mm² Wire, 1021 – 2048 CMA, Open Barrel, Unplated Plating, 10.9 mm [.43 in] Length, Reel



Product Drawings AM WIRE PIN 20-17 .013 BR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_925552-1_U.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_925552-1_U.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_925552-1_U.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English