




Connectors > Contacts > Connector Contacts

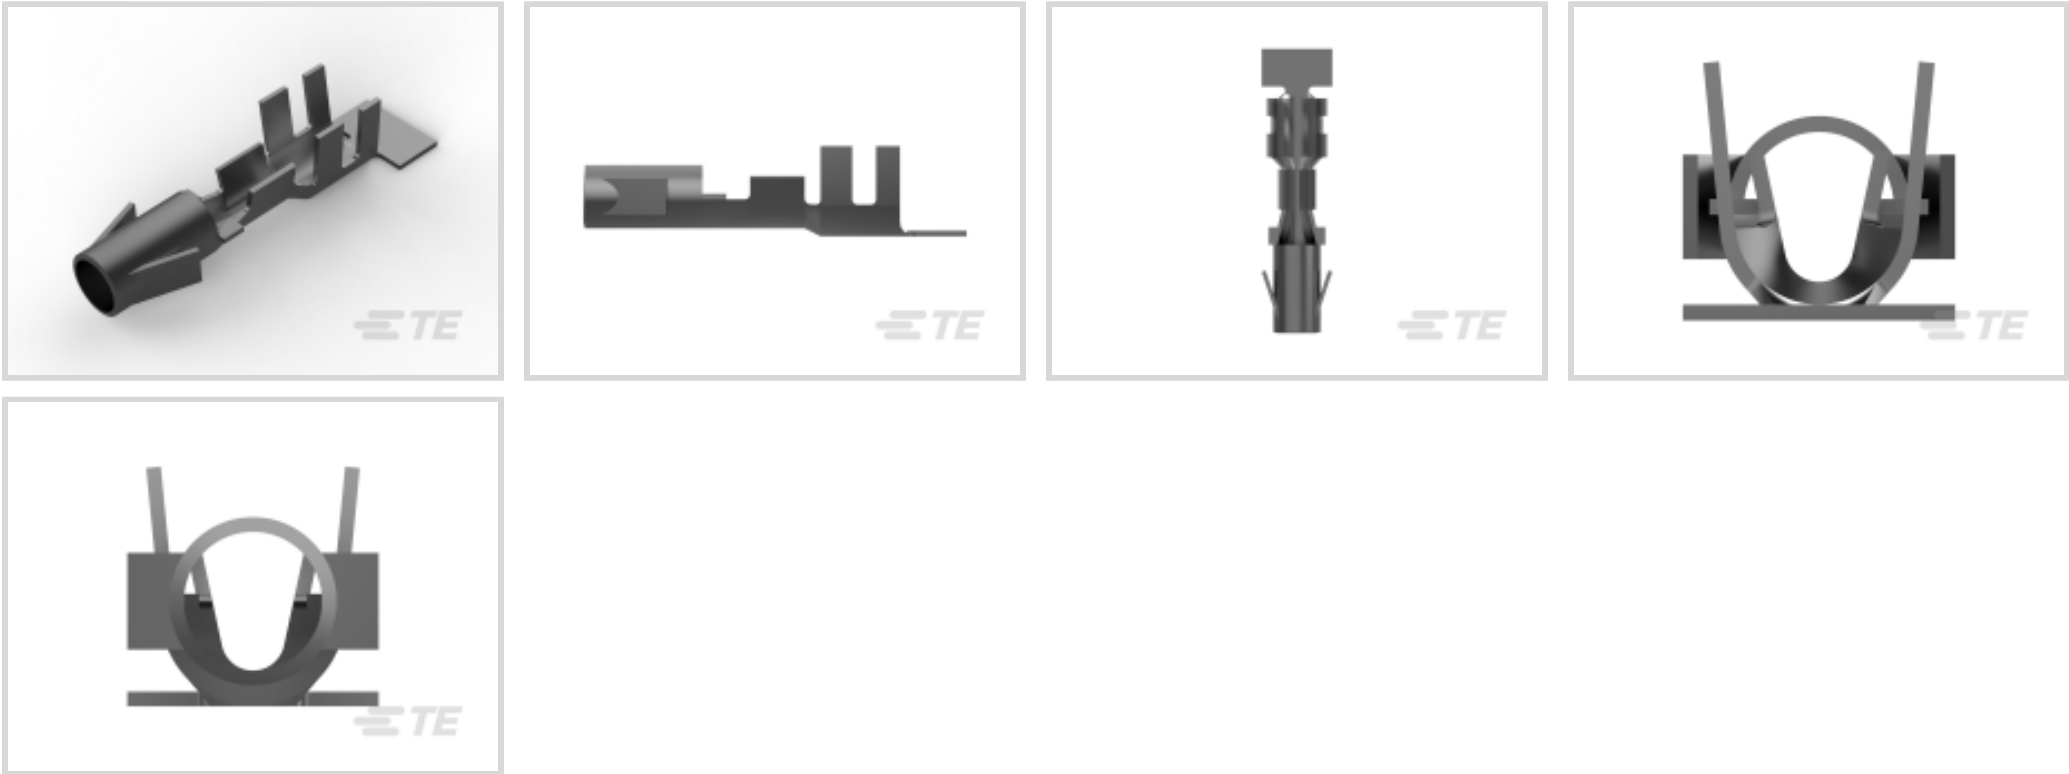

Contact Type: **Socket**

Contact Mating Area Plating Material: **Tin (Sn)**

Wire Contact Termination Area Plating Material: **Pre-Tin**

Operating Voltage: **250 VAC**

Contact Retention Within Housing: **With**

Features

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Contact Features

Contact Orientation	Straight
Mating Pin Diameter	3.56 mm[.14 in]
Wire Contact Termination Area Plating Material Finish	Bright
Contact Type	Socket
Contact Mating Area Plating Material	Tin (Sn)
Wire Contact Termination Area Plating Material	Pre-Tin
Contact Retention Within Housing	With
Contact Base Material	Brass
Contact Current Rating (Max)	17 A

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable



Mechanical Attachment

Wire Insulation Support	With
Contact Retention Type Within Housing	Locking Lance

Dimensions

Compatible Insulation Diameter Range	2.5 – 4.5 mm[.098 – .177 in]
Wire Size	.5 – 2 mm²

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Packaging Features

Packaging Quantity	2500
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 1-480510-0 04P .140 MNL PLUG NAT	 TE Part # 539764-1 EXTRACTION TOOL	 TE Part # 1-480672-0 09P .140 MNL PLUG PM NAT	 TE Part # 1-480585-0 09P .140 MNL PLUG NAT
 TE Part # 925451-1 M-N-L SOCKET HSG	 TE Part # 1-480672-9 09P .140 MNL PLUG PM BLK	 TE Part # 2151320-1 OCEAN_2.0_APPLICATOR-S-100F190O180F-RSM	 TE Part # 1-350346-0 03P .140 MNL PLUG P/M NAT
 TE Part # 1-350344-0 02P .140 MNL PLUG NAT	 TE Part # 7-2151320-7 OCEAN_2.0_SPARE_PART_KIT-100F190O180F	 TE Part # 1752938-2 SDE DIE SET 3.5 MM MNL	

Also in the Series | Commercial MATE-N-LOK

 Connector Caps & Covers(2)	 Connector Contacts(150)	 Connector Seals & Cavity Plugs(1)	 Insertion & Extraction Tools(3)
--------------------------------	-----------------------------	---------------------------------------	-------------------------------------



PCB Headers & Receptacles(56)



Power Contacts(146)



Rectangular Power Connectors(182)



Standard Circular Connectors(2)



Wire-to-Board Headers & Receptacles (56)


Customers Also Bought



TE Part #1-1703839-1
2POS,TAB 2.8X0.8,TAB HSG,ASSY



TE Part #CAT-SE594-M1F
M8 Male Straight Single Ended Cable Assembly

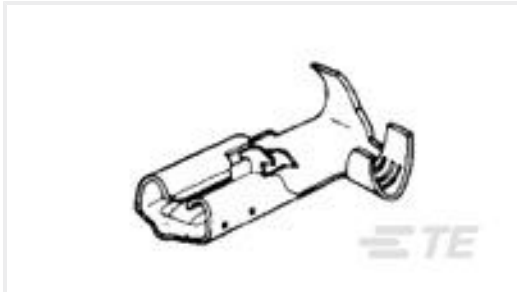


TE Part #172761-1
PL 250 FLAG REC 18-22 0.40 X 49.2 PTBR



TE Part #925712-1
.140 DIA SOCKET



TE Part #1-6609053-1
15EHT1=F7669 S0

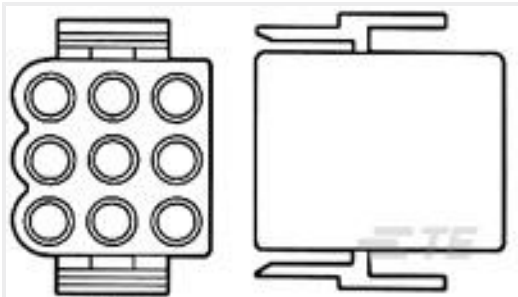

TE Part #1-480585-0
09P .140 MNL PLUG NAT



TE Part #962938-1
MPT REC 9.5 Contact SWS Sn



TE Part #EC1125-000
06183900



TE Part #925712-2
.140 DIA SOCKET

Documents



CAD Files

Customer View Model

[ENG_CVM_925714-1_Y.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_925714-1_Y.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_925714-1_Y.2d_dxf.zip](#)

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English