




Terminals & Splices > Quick Disconnects

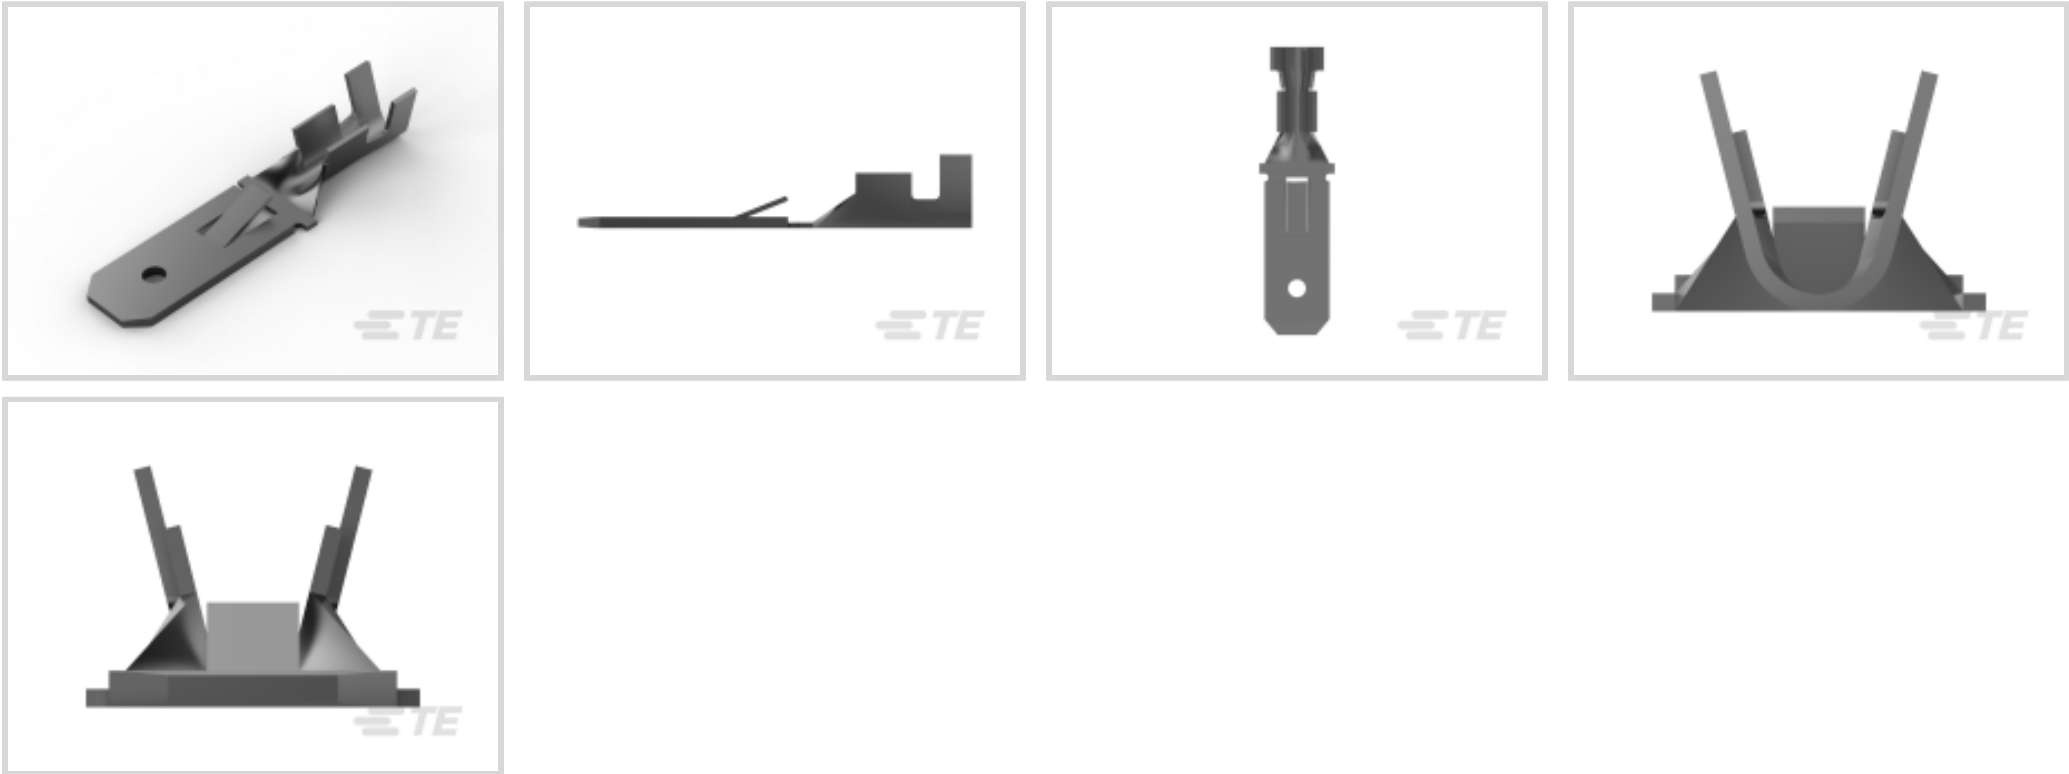

Quick Disconnect Terminal Type: **Tab**

Wire Size: **1.03 – 2.62 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Tab
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Locking Lance Height	1.4 mm[.06 in]
Wire Insulation Support	With
Mating Retention Type	Locking Lance

Dimensions

Product Length	27.9 mm[1.098 in]
Compatible Insulation Diameter Range	2.1 – 2.9 mm[.083 – .114 in]
Terminal Material Thickness	.41 mm[.016 in]
Wire Size	1.03 – 2.62 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Packaging Features

Packaging Quantity	3000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these



limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 2150195-2
OCEAN_2.0_Applicator-E-110F140OV-REA

TE Part # 1-1579007-4
EXTRACTION TOOL

TE Part # 4-1579007-3
EXTRACTION TOOL KIT

TE Part # 7-2150195-7
OCEAN_2.0_SPARE_PART_KIT-110F140OV

Also in the Series | FASTIN-FASTON 250

Crimp Terminal Housings(195)

Insertion & Extraction Tools(2)

Quick Disconnects(216)

Customers Also Bought

TE Part #62253-2
250 FASTON REC 14-10 TPBR

TE Part #6-160448-5
FF 250 REC 1.0-2.5MM2 TPBR

TE Part #656077-000
CWT-3803

TE Part #6-2208684-3
39POS,AMP MCP2.8,REC HSG,ASSY




TE Part #176291-9
UNIV POWER CAP HSG 18P F/H



TE Part #35135
TERMINAL,SOLIS R 12-10 1/2



TE Part #K1153019
Limit switch G12-421-M-18 920

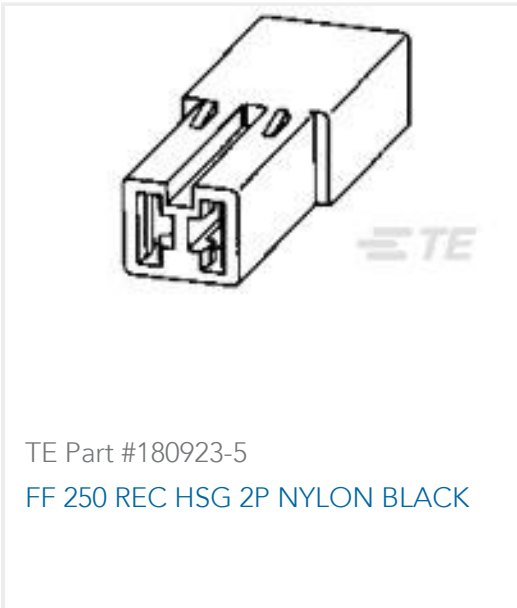

TE Part #180923-5
FF 250 REC HSG 2P NYLON BLACK



TE Part #1-66359-5
III+ PIN, 18-14,TIN,STRIP



TE Part #940251N001
102L033/U(S100)

Documents

Product Drawings

FF 250 TAB 17-13 AWG .016 TPBR

English

CAD Files

Customer View Model

ENG_CVM_CVM_928962-4_G.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_928962-4_G.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_928962-4_G.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

1654742_HOUSEHOLD_APPLIANCES_RAST5

English

Product Specifications

EB**General Application Specification for Open Barrel Terminals

English

Application Specification

English

