
**966066-2 ~** ACTIVE

TE Internal #: 966066-2 Ferrule, 23 AWG, .25 mm<sup>2</sup> Wire, 509 CMA, Closed Barrel, Tin Plating, 12 mm [.472 in] Length, Box, Discrete Wire, Stranded Wire, Partially Insulated

#### View on TE.com >



Terminals & Splices > Crimp Wire Pins, Tabs & Ferrules

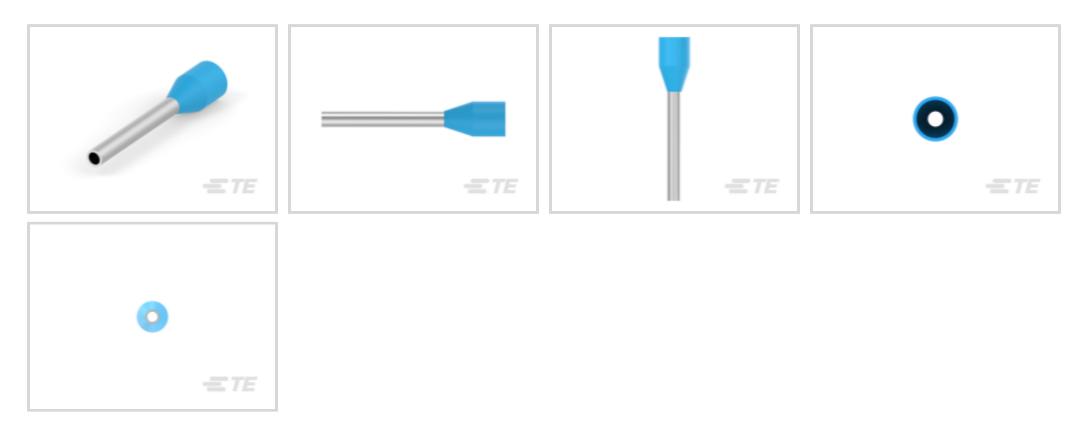

Crimp Wire Terminal Type: Ferrule

Compatible Insulation Diameter Range: 1.7 mm [.06 in ]

Wire Size: 509 CMA

## Features

### Product Type Features

Sealable

Compatible With Discrete Wire Type	Stranded
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Body Features	
Primary Product Color	Light Blue
Contact Features	
Contact Mating Area Length	8 mm[.312 in]
Crimp Wire Terminal Type	Ferrule
Barrel Type	Closed
Terminal Plating Material	Tin
Terminal Orientation	Straight
Mechanical Attachment	
Wire Insulation Support	Without
Dimensions	

### 966066-2

Ferrule, 23 AWG, .25 mm<sup>2</sup> Wire, 509 CMA, Closed Barrel, Tin Plating, 12 mm [.472 in] Length, Box, Discrete Wire, Stranded Wire, Partially Insulated



Strip Length	10 mm[.394 in]
2-Wire Size	23 AWG
Compatible Insulation Diameter Range	1.7 mm[.06 in]
Wire Size	509 CMA
Barrel Inside Diameter	1.8 mm[.07 in]
Terminal Material Thickness	.15 mm[.005 in]
Overall Product Length	12 mm[.472 in]
Usage Conditions	
Insulation Option	Partially Insulated
Packaging Features	
Packaging Quantity	500
Packaging Method	Box
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Presses Capability	Not applicable for colder process capability

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

### 966066-2

Ferrule, 23 AWG, .25 mm<sup>2</sup> Wire, 509 CMA, Closed Barrel, Tin Plating, 12 mm [.472 in] Length, Box, Discrete Wire, Stranded Wire, Partially Insulated



# **Compatible Parts**



# Customers Also Bought



TE Part #966067-2 FER,WIRE,PL SLV,.50/20,L8,WHITE,LP	TE Part #6-1393227-5 RTE24006F	TE Part #966066-3 FER,WIRE,PL SLV,.34/22,L6,TURQOISE, LP	TE Part #539660-1 ADERENDHUELSEN (Ferrule) Crimp Tool



## Documents

Product Drawings FER,WIRE,PL SLV,.25/24,L8,LIGHT-BLUE,LP

English

#### **CAD** Files

3D PDF

3D

### 966066-2

Ferrule, 23 AWG, .25 mm<sup>2</sup> Wire, 509 CMA, Closed Barrel, Tin Plating, 12 mm [.472 in] Length, Box, Discrete Wire, Stranded Wire, Partially Insulated



Customer View Model ENG\_CVM\_CVM\_966066-2\_C.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_966066-2\_C.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_966066-2\_C.3d\_stp.zip

English

**Customer View Model** 

ENG\_CVM\_966066-2\_C2.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_966066-2\_C2.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_966066-2\_C2.2d\_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Wire Ferrules

English

WIRE END FERRULES

English

Agency Approvals CSA Certificate

English