## HT-SCE-5K-1/8-2.0-9 - ACTIVE

### Sigma SC

TE Internal #: 991361-000 Ladder, High Temperature, 2:1, White, 1 Markers per Sleeve, 50 mm [2 in] Length, 3.18 mm [.125 in] Expanded Inside, Sigma SC, Printable Tubing

View on TE.com >





Printable Tubing Type: Ladder

Printable Tubing Grade: High Temperature

Shrink Ratio: 2:1

Primary Product Color: White

Markers per Sleeve: 1

All HT-SCE High Temperature Sleeves (51)

## Features

### Product Type Features

Printable Tubing Type

Printable Tubing Grade

Ladder

High Temperature



### **Body Features**

Shrink Ratio	2:1
Primary Product Color	White
Markers per Sleeve	1
Dimensions	
Product Length	50 mm[2 in]
Expanded Inside Diameter (Min)	3.18 mm[.125 in]
Recovered Inside Diameter (Max)	1.58 mm[.062 in]
Compatible Cable Diameter Range	1.75 – 2.66 mm[.068 – .104 in]
Usage Conditions	
Operating Temperature Range	-55 – 225 °C[-67 – 437 °F]
Printer/Label Features	
Printer Technology	Thermal Transfer
Packaging Features	

**C** For support call+1 800 522 6752

04/14/2025 11:00PM | Page 1

### HT-SCE-5K-1/8-2.0-9

Ladder, High Temperature, 2:1, White, 1 Markers per Sleeve, 50 mm [2 in] Length, 3.18 mm [.125 in] Expanded Inside, Sigma SC, Printable Tubing



# Packaging Quantity 5000

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**



## HT-SCE-5K-1/8-2.0-9


Ladder, High Temperature, 2:1, White, 1 Markers per Sleeve, 50 mm [2 in] Length, 3.18 mm [.125 in] Expanded Inside, Sigma SC, Printable Tubing






TE Part # 1-2186501-1 T3212-SWARE-PRINTER

## Also in the Series | Sigma SC

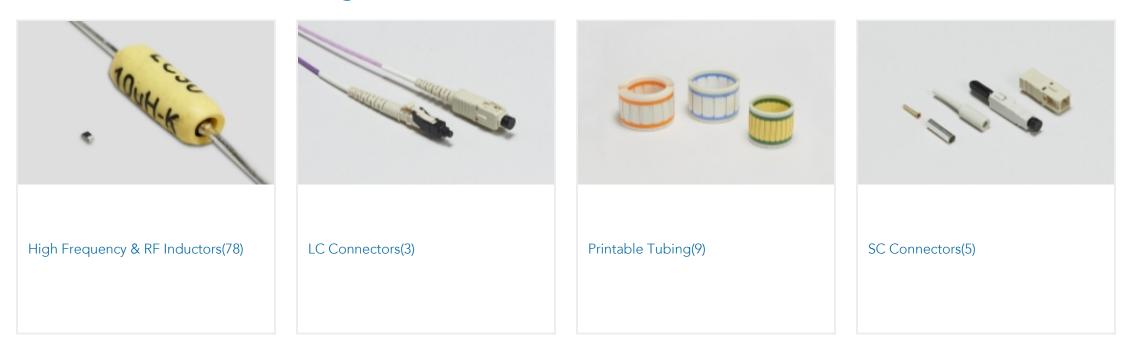

## Customers Also Bought

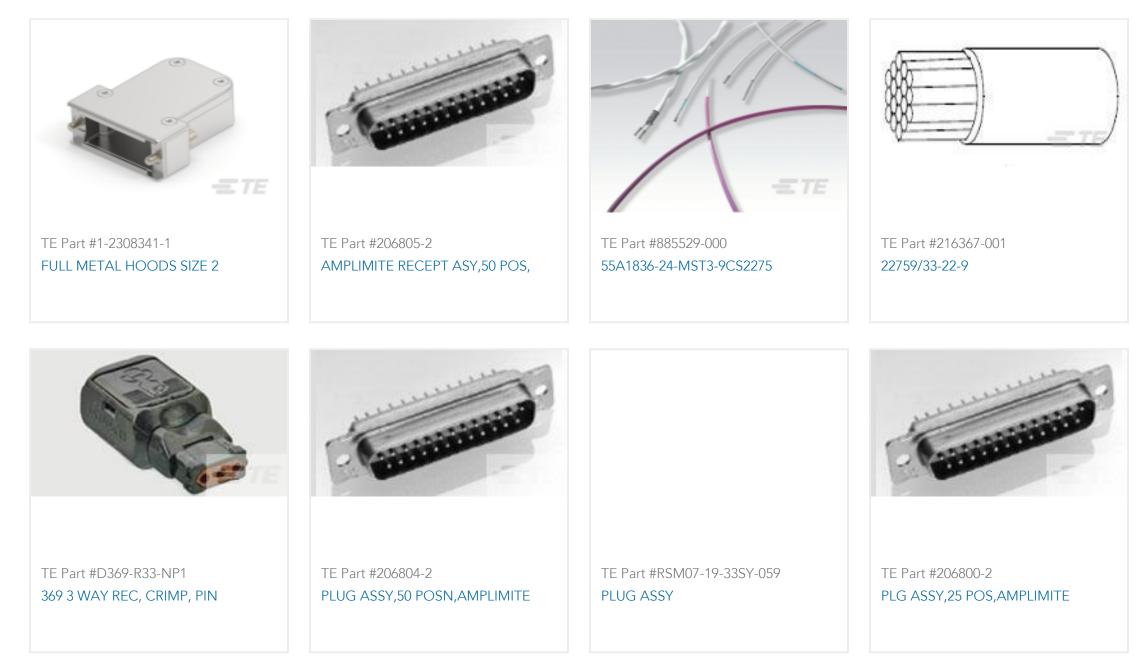



## HT-SCE-5K-1/8-2.0-9

Ladder, High Temperature, 2:1, White, 1 Markers per Sleeve, 50 mm [2 in] Length, 3.18 mm [.125 in] Expanded Inside, Sigma SC, Printable Tubing



## Documents

Datasheets & Catalog Pages HT-SCE High Temperature Heat Shrink Identification System

English

Cable Identification Product Shelf Life

English

Product Specifications
IDENTIFCATION PRINTER PRODUCT RIBBON MATRIX

English

Instruction Sheets Instruction Sheet (non U.S.)

English