


RAYCHEM | RAYCHEM GelWrap

TE Internal #: CB2011-000 Splice Closure, ≤ 1 kV, 4 – 95 mm² Conductor, #14 – 4/0 AWG/kcmil Conductor, Various LV Cable Shield, 1 Main Wires (Max), RAYCHEM GelWrap



Energy & Power > Power Cable Accessories > Joints & Splices

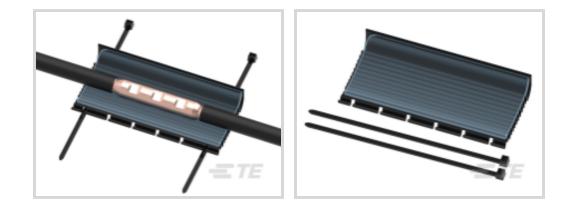

Installation Technology: Power Gel
Product Availability: Europe, Middle East & Africa
Installation Instruction: English
Joints & Splice Product Type: Splice Closure
Voltage Class: ≤1 kV

Features

Product Type Features

Cable Sealing Method	Gel
Filler	PowerGel
Shelf Life	Unlimited
Installation Technology	Power Gel
Joints & Splice Product Type	Splice Closure
Cable Shield Style	Various LV
Closing Method	Snap
Configuration Features	
Number of Main Wires (Max)	1
Electrical Characteristics	
Voltage Class	$\leq 1 \text{ kV}$
Body Features	
Primary Product Color	Black
Flexibility	Semi-Flexible
Dimensions	
Compatible Conductor Cross-Section Range	4 – 95 mm²
Compatible Conductor Range	#14 – 4/0 AWG/kcmil



GELWRAP-18/4-200UL(B6)

Splice Closure, ≤ 1 kV, 4 – 95 mm² Conductor, #14 – 4/0 AWG/kcmil Conductor, Various LV Cable Shield, 1 Main Wires (Max), RAYCHEM GelWrap



Compatible Insulation Diameter Range	4 – 18 mm[.7 – .15 in]
Usage Conditions	
Operating Temperature Range	-40 – 90 °C
Fluid Resistance Type	Hydrochloric Acid, Motor Oil, Sodium Chloride, Sodium Hydroxide
Environmental Resistance	Moisture, Protection Against Humidity, Rain, Self Sealing, Water Repelant, Weathering
Operation/Application	
Mechanical Resistance	Against Mechanical Impact
UV-Stabilized	Yes
Industry Standards	
Compatible With Approved Standards Products	ANSI C119.1, UL
Product Availability	
Product Availability	Europe, Middle East & Africa
Packaging Features	
Packaging Quantity	6

Other

Product Use

PowerGel-filled wraparound for LV splices and cable jacket repair

English

Installation Instruction

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU Compliant EU ELV Directive 2000/53/EC Compliant No Restricted Materials Above Threshold China RoHS 2 Directive MIIT Order No 32, 2016 EU REACH Regulation (EC) No. 1907/2006 Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC Low Halogen - Br, Cl, F, I < 900 ppm per Halogen Content homogenous material. Also BFR/CFR/PVC Free Solder Process Capability Not applicable for solder process capability

L For support call+1 800 522 6752

GELWRAP-18/4-200UL(B6)

Splice Closure, ≤ 1 kV, 4 – 95 mm² Conductor, #14 – 4/0 AWG/kcmil Conductor, Various LV Cable Shield, 1 Main Wires (Max), RAYCHEM GelWrap



Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





Also in the Series | RAYCHEM GelWrap

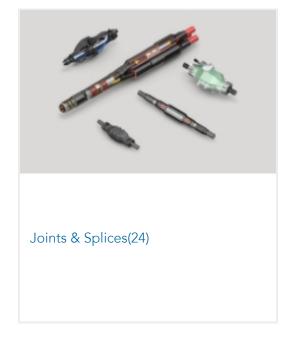


Customers Also Bought

C For support call+1 800 522 6752

GELWRAP-18/4-200UL(B6)

Splice Closure, $\leq 1 \text{ kV}$, 4 – 95 mm² Conductor, #14 – 4/0 AWG/kcmil Conductor, Various LV Cable Shield, 1 Main Wires (Max), RAYCHEM GelWrap



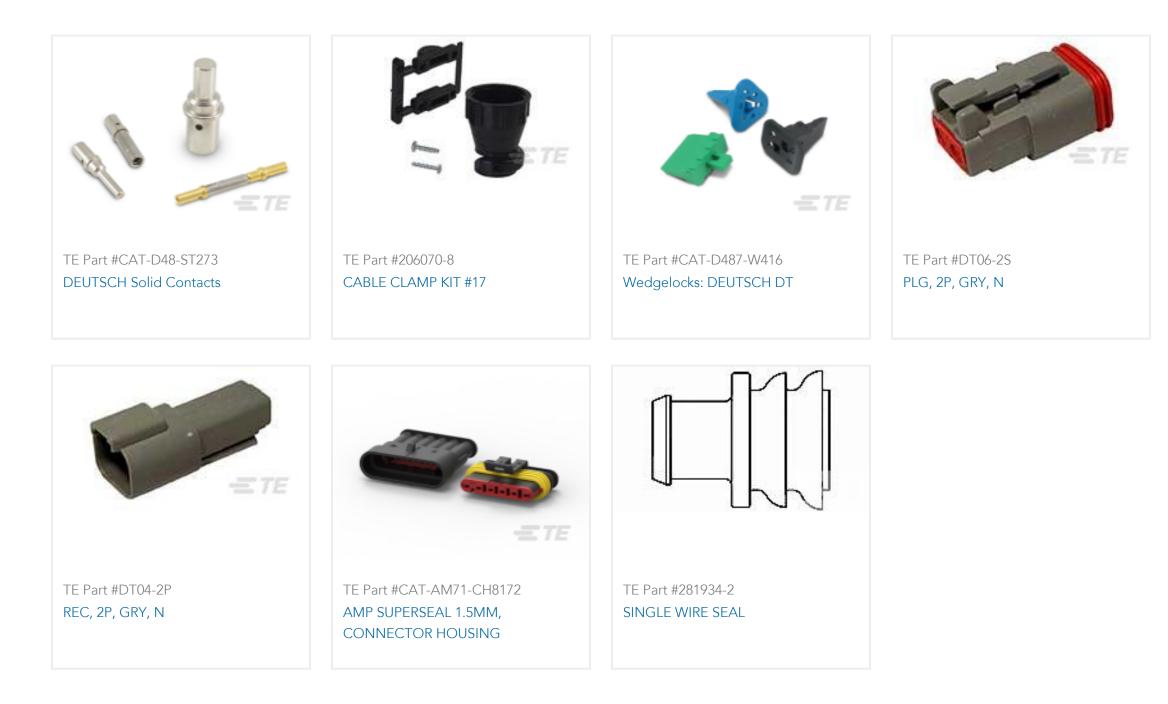

Documents

Product Drawings GELWRAP-18/4-200UL(B6)

English

Datasheets & Catalog Pages GELWRAP-WRAPAROUND-SLEEVE-CABLE-ACCESSORIES

English

Agency Approvals

UL Report

English