




Heat Shrink Tubing > SST Heat Shrink Tubing

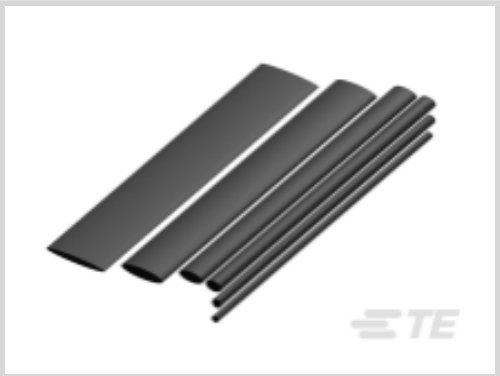

Tubing Product Type: **Heat Shrink Tubing**

Primary Product Color: **Black**

Shrink Ratio: **3:1**

Wall Type: **Single Wall**

Recovered Inside Diameter (Max): **3.81 mm [.15 in]**

[All SST Heat Shrink Tubing \(63\)](#)

Features

Product Type Features

Tubing Product Type	Heat Shrink Tubing
Wall Type	Single Wall

Electrical Characteristics

Operating Voltage (Max)	.6 kV
-------------------------	-------

Body Features

Fluid Type	Aviation Fuel, De-Icing Fluid, Hydraulic Fluid, Lubricating Oil, Water
Primary Product Color	Black
Shrink Ratio	3:1
Primary Product Material	Irradiated Modified Polyolefin
Flexibility	Semi-Rigid

Dimensions

Product Length	762 mm[30 in]
Recovered Wall Thickness (Tolerance)	1.78 mm[.07 in]
Recovered Inside Diameter (Max)	3.81 mm[.15 in]
Expanded Inside Diameter (Min)	10.16 mm[.4 in]
Tubing Size Range	3.81 – 10.16 mm[.15 – .4 in]



Usage Conditions

Resistance Properties	Moisture
Shrink Temperature (Min)	90 °C
Tubing Flammability Type	Non-Flame-Retardant
Operating Temperature Range	-55 – 110 °C
Recovery Temperature	121 °C

Operation/Application

Mechanical Resistance	Abrasion, Fluids, Moisture
-----------------------	----------------------------

Product Availability

Applicable Region	Global
-------------------	--------

Packaging Features

Packaging Method	Box
------------------	-----

Other

Meets Low Outgassing Requirements	No
Product Source	Czech Republic

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products



will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 955018-000
CLTEQ-M105-TUNNEL-OVEN




TE Part # 2326489-1
MODEL 105 TUNNEL OVEN, 36"
ENTRY, STAND A




TE Part # 2394980-1
MOD 105 TUN OVEN, 69" ENTRY,
STANDARD

Also in the Series | RAYCHEM SST/SST-FR

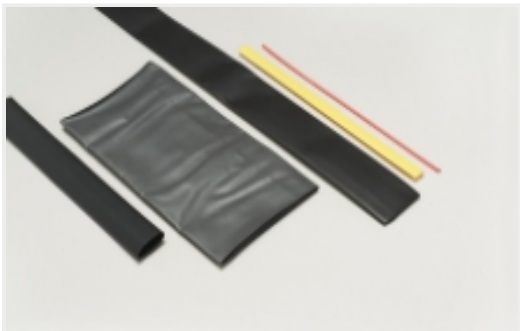

Heat Shrink Tubing(65)



Single Wall Tubing(62)

Customers Also Bought



TE Part #102917-5
MOD IV RECP PLTD 15 SEL



TE Part #350547-2
UMN L PIN 20-14 AUBR L/P



TE Part #2-521055-2
ULTRAFAST 250 ASSY TAB 22-18
AWG TPBR



TE Part #DTM04-2P
REC, 2P, GRY, N



TE Part #2-1761713-3
IDC LOW PRO HDR 10P VERT SHT L




TE Part #CAT-HST-SWFRX4
SWFR-X4 Heat Shrink Tubing



TE Part #1757820-7
AMPLIMITE,ASY,RCPT,STD,109,ZN,2,
CT



TE Part #794270-1
02P UMN L WIRE SEAL

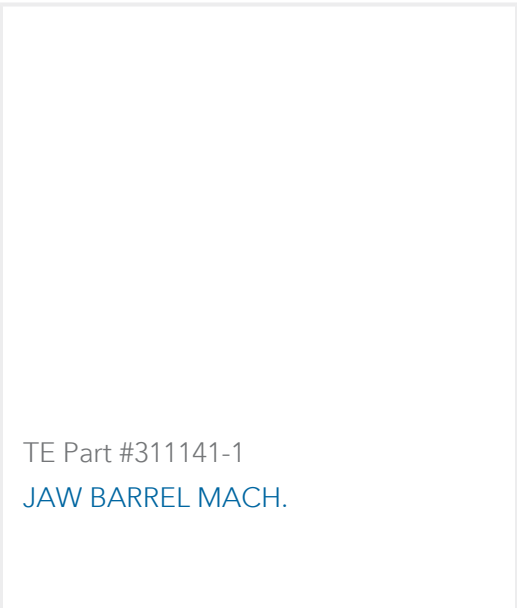

Documents

Product Drawings

SST-30-04/226

English

Datasheets & Catalog Pages

Measuring_Single_Wall_Tubing

English

SST and SST-FR Pages from 9-1773447-9

English

Selecting_Correct_Tubing_1216

English

Product Specifications

Application Specification

English