CSTA263NN00440001000 - ACTIVE

TE Internal #: CSA263N00440001000 6 Position Circular Connector, Cable-to-Cable, Power & Signal, Cable Mount (Free-Hanging), Electrodeposited Nickel, Zinc Alloy, PA66

View on TE.com >

Connectors > Circular Connectors > Standard Circular Connectors



Number of Positions: 6

Connector System: Cable-to-Cable

Sealable: No

Circuit Application: Power & Signal

Connector Mounting Type: Cable Mount (Free-Hanging)

Features

Product Type Features



Connector Product Type	Housing Assembly
Connector System	Cable-to-Cable
Sealable	No
Circular Connector Type	Plug
Shell Type	Metal
Configuration Features	
Number of Positions	6
Number of Power Positions	4
Number of Signal Positions	2
Contacts Preloaded	No
Electrical Characteristics	
Operating Voltage	250 VDC, 630 VDC
Body Features	
Environmental Protection	IP67

6 Position Circular Connector, Cable-to-Cable, Power & Signal, Cable Mount (Free-Hanging), Electrodeposited Nickel, Zinc Alloy, PA66



Environmental Protection Type	Sealed
Shell Plating Material	Electrodeposited Nickel
Shell Base Material	Zinc Alloy
Circular Connector Insulation Material Type	PA66
Mechanical Attachment	
Mating Retention Type	Screw
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Mating Retention	With
Housing Features	
Circular Connector Shell Size	40
Alignment Keyed	0°
Dimensions	
Cable Diameter Range	9 – 16 mm[.35 – .63 in]
Usage Conditions	
IP Water Sealing Level	IP67
Operating Temperature Range	-20 – 130 °C[-4 – 266 °F]

Operation/Application

Durability Rating	500 Cycles
Circuit Application	Power & Signal
Shielded	Yes
Industry Standards	
UL Flammability Rating	UL 94V-0
Compatible With Approved Standards Products	UL
Product Compliance	
Product Compliance For compliance documentation, visit the product page on TE.com>	
·	Compliant with Exemptions
For compliance documentation, visit the product page on TE.com>	Compliant with Exemptions Compliant with Exemptions
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	

6 Position Circular Connector, Cable-to-Cable, Power & Signal, Cable Mount (Free-Hanging), Electrodeposited Nickel, Zinc Alloy, PA66



Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Pb (3.5% in Component) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Yet Reviewed for halogen content

Halogen Content


Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts

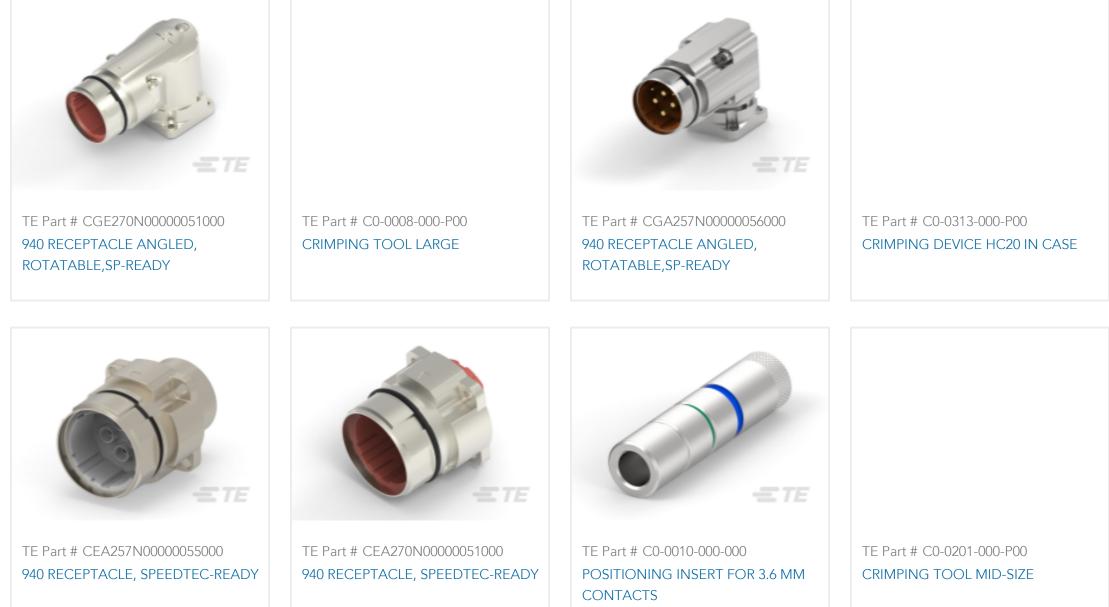




6 Position Circular Connector, Cable-to-Cable, Power & Signal, Cable Mount (Free-Hanging), Electrodeposited Nickel, Zinc Alloy, PA66





Customers Also Bought

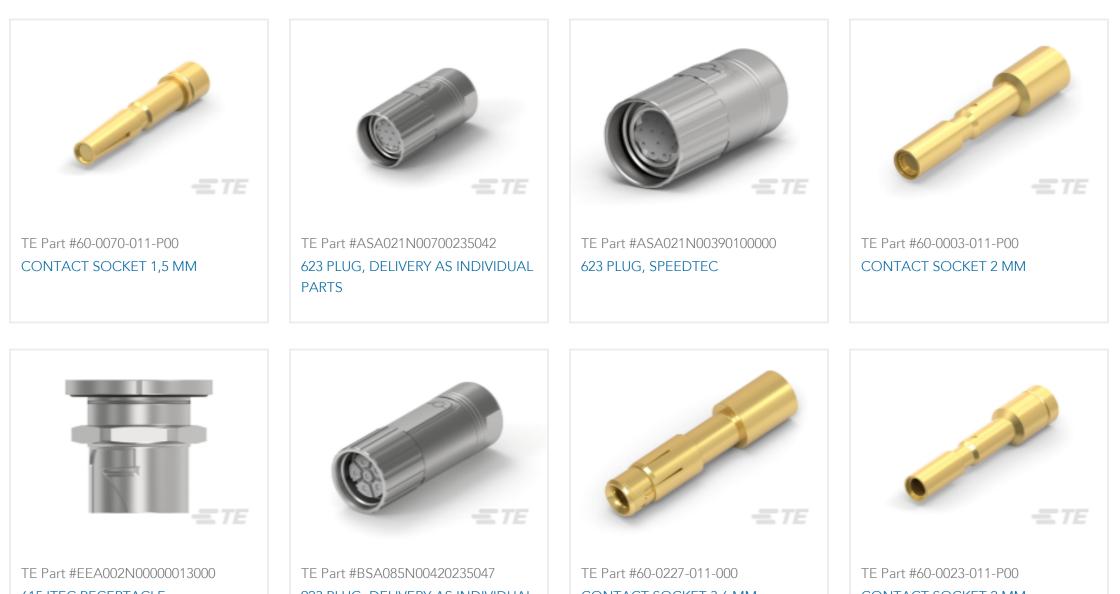


615 ITEC RECEPTACLE

923 PLUG, DELIVERY AS INDIVIDUAL PARTS

CONTACT SOCKET 3,6 MM

CONTACT SOCKET 2 MM

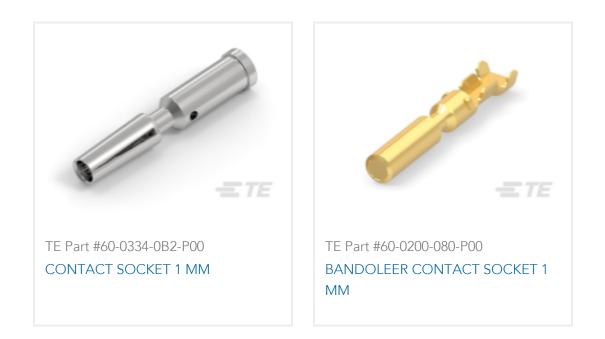

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_CSA263N00440001000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_CSA263N00440001000_A.3d_igs.zip

English

6 Position Circular Connector, Cable-to-Cable, Power & Signal, Cable Mount (Free-Hanging), Electrodeposited Nickel, Zinc Alloy, PA66



Customer View Model

ENG_CVM_CVM_CSA263N00440001000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages CSA263N00440001000

English

fuer Datenblaetter, die online konfigurierbar sind

German

Product Specifications

German