SHF260-0113-2-9 ACTIVE

RAYCHEM | RAYCHEM SHF Series

TE Internal #: CV6257-000

1000 VAC, -65 – 260 °C, 2 AWG, Nickel-Coated Copper, RAYCHEM

SHF Series, Power Cable

View on TE.com >



Wire & Cable > Power Cable > Flexible Power Cable, 1000 VAC



Cable Type: SHF260

Operating Voltage: 1000 VAC

Wire & Cable Insulation Material: Modified PFA

Operating Temperature Range: -65 – 260 °C

Wire Size: 2 AWG

All Flexible Power Cable, 1000 VAC (18)

Features

Product Type Features

Froduct Type realures	
Wall Type	Single Wall
Configuration Features	
Number of Strands	1665
Number of Conductors	1
Electrical Characteristics	
Operating Voltage	1000 VAC
Body Features	
Wire Color (Base)	White
Wire & Cable Insulation Material	Modified PFA
Conductor Material	Nickel-Coated Copper
Dimensions	
Strand Size	34 AWG
Outside Cable Diameter	9.83 mm[.387 in]
Conductor Diameter Range	8.26 mm[.325 in]

2 AWG

Wire Size



Cable Type	SHF260
Operating Temperature Range	-65 – 260 °C

Product Compliance


For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Out of Scope - excluded from Halogen requirements
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

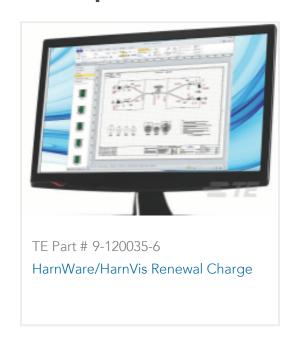

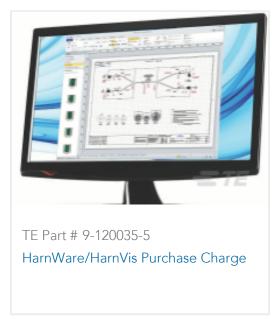

Also in the Series | RAYCHEM SHF Series



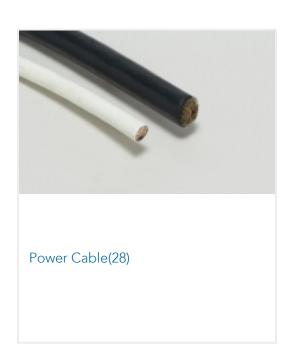

Customers Also Bought





















Documents

Product Drawings SHF260-0113-2-9

English

Datasheets & Catalog Pages
SHF-260 Highly Flexible Wire

English

Product Specifications

1000 VAC, -65 – 260 °C, 2 AWG, Nickel-Coated Copper, RAYCHEM SHF Series, Power Cable



Wire, Electric, Modified Perfluoroalkoxy Copolymer Resin-Insulated, Nickel-Coated Copper

English