DEUTSCH | DEUTSCH DRC

TE Internal #: DRC12-70PB 70 Position Housing, Housing for Male Terminals, Wire-to-Wire, 5.49 mm [.216 in] Centerline, Sealable, Black, Wire & Cable, Power, DEUTSCH DRC

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DRC Housings



Number of Positions: 70

Connector & Housing Type: Housing for Male Terminals

Mating Pin Diameter: 1.59 mm [.063 in]

Connector System: Wire-to-Wire

Centerline (Pitch): 5.49 mm [.216 in]

All DEUTSCH DRC Housings (117)

Features

Product Type Features

Mixed & Hybrid Connector

Connector Shape

No

Rectangular

Connector & Housing Type	Housing for Male Terminals	
Connector System	Wire-to-Wire	
Sealable	Yes	
Primary Locking Feature	Integrated in Housing	
Connector & Contact Terminates To	Wire & Cable	
Configuration Features		
Blank Cavity Position	0	
Connector Seal Code	N Seal	
Number of Positions	70	
Number of Rows	5	
Electrical Characteristics		
Operating Voltage	250 VDC	
Nominal Voltage Architecture	12 V, 24 V, 48 V	
Body Features		
Cable Exit Angle	180°	

C For support call+1 800 522 6752

70 Position Housing, Housing for Male Terminals, Wire-to-Wire, 5.49 mm [.216 in] Centerline, Sealable, Black, Wire & Cable, Power, DEUTSCH DRC



Primary Product Color	Black	
Connector & Keying Code	В	
Contact Features		
Contact Size	Size 16	
Contact Type	Pin	
Mating Pin Diameter	1.59 mm[.063 in]	
Contact Current Rating (Max)	13 A	
Mechanical Attachment		
Strain Relief	Add By Accessory	
Terminal Position Assurance	No	
Mating Alignment Type	Keyed	
Mating Alignment	With	
Connector Mounting Type	With Panel Mount	
Connector Mounting Type		

Dimensions

Row-to-Row Spacing	5.49 mm[.216 in]	
Product Width	126.82 mm[4.993 in]	
Product Length	44.63 mm[1.757 in]	
Connector Height	58.93 mm[2.32 in]	
Usage Conditions		
Operating Temperature (Max)	125 °C[257 °F]	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]	
Operation/Application		
Circuit Application	Power	
Industry Standards		
IP Rating	IP68, IP6К9К	
Compatible With Agency/Standards Products	SAE J2030	
UL Flammability Rating	20mm Flame Test per Standard UL-94	
Packaging Features		

C For support call+1 800 522 6752

70 Position Housing, Housing for Male Terminals, Wire-to-Wire, 5.49 mm [.216 in] Centerline, Sealable, Black, Wire & Cable, Power, DEUTSCH DRC



Packaging Quantity	21
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC	
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.	
Solder Process Capability	Not reviewed for solder process capability	


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

70 Position Housing, Housing for Male Terminals, Wire-to-Wire, 5.49 mm [.216 in] Centerline, Sealable, Black, Wire & Cable, Power, DEUTSCH DRC



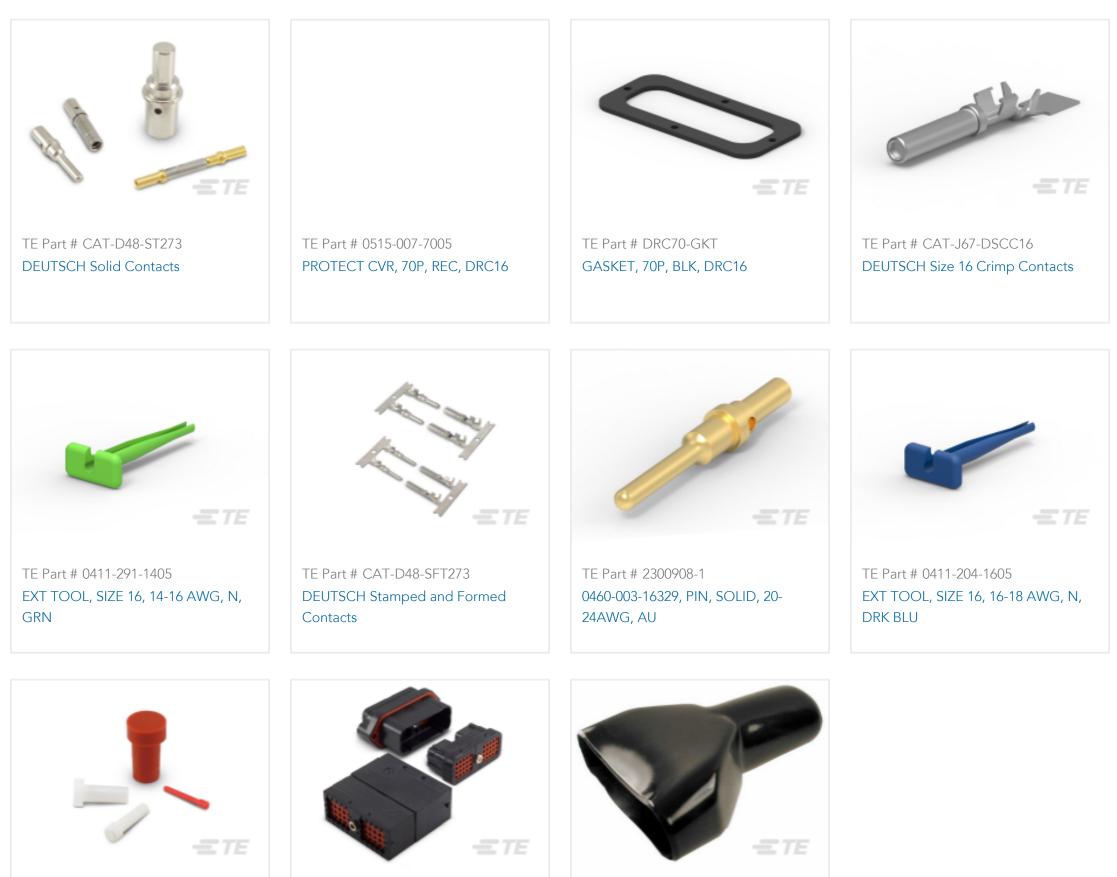

TE Part # CAT-D48-SP729 DEUTSCH Sealing Plugs

TE Part # CAT-D799-CH8172 TE Part # DRC70-BT DEUTSCH DRC Housings BOOT, 70P, 16SZ, PLG/REC, ST, BLK



Also in the Series DEUTSCH DRC

Automotive Headers(44)	Automotive Housings(117)	Connector Backshells(6)	Connector Strain Relief(3)



Customers Also Bought

70 Position Housing, Housing for Male Terminals, Wire-to-Wire, 5.49 mm [.216 in] Centerline, Sealable, Black, Wire & Cable, Power, DEUTSCH DRC





Documents

Product Drawings REC, 70P, BLK, N, FLANGE, B

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_DRC12-70PB_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_DRC12-70PB_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DRC12-70PB_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages **TERMINALS AND CONNECTORS**

English

ICT Terminals and Connectors Catalogue

English

Product Specifications **Application Specification**

English

Agency Approvals UL Report

English