

### DEUTSCH | DEUTSCH DRC

TE Internal #: DRC26-50S01 50 Position Housing, Housing for Female Terminals, Wire-to-Wire, 4.42 mm [.174 in] Centerline, Sealable, Black, Wire & Cable, Power, DEUTSCH DRC

#### View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DRC Housings



### Number of Positions: 50

Connector & Housing Type: Housing for Female Terminals

Mating Pin Diameter: 1.02 mm [.04 in ]

Connector System: Wire-to-Wire

Centerline (Pitch): 4.42 mm [.174 in ]

All DEUTSCH DRC Housings (117)

### Features

### Product Type Features

Mixed & Hybrid Connector

Connector Shape

No

Rectangular

Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	50
Number of Rows	5
Electrical Characteristics	
Operating Voltage	250 VDC
Nominal Voltage Architecture	24 V, 48 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Black
Connector & Keying Code	01

**C** For support call+1 800 522 6752

50 Position Housing, Housing for Female Terminals, Wire-to-Wire, 4.42 mm [.174 in] Centerline, Sealable, Black, Wire & Cable, Power, DEUTSCH DRC



### **Contact Features**

Contact Size	Size 20
Contact Type	Socket
Mating Pin Diameter	1.02 mm[.04 in]
Contact Current Rating (Max)	7.5 A
Mechanical Attachment	
Strain Relief	With
Terminal Position Assurance	No
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PAGF
Centerline (Pitch)	4.42 mm[.174 in]
Dimensions	
Row-to-Row Spacing	4.42 mm[.174 in]
Compatible Insulation Diameter Range	1.02 – 2.41 mm[.04 – .095 in]
Product Width	68.58 mm[2.7 in]
Product Length	32.36 mm[1.274 in]
Connector Height	36.45 mm[1.435 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
IP Rating	IP68, IP6K9K
Compatible With Agency/Standards Products	SAE J2030
UL Flammability Rating	20mm Flame Test per Standard UL-94
Packaging Features	
Packaging Quantity	125

50 Position Housing, Housing for Female Terminals, Wire-to-Wire, 4.42 mm [.174 in] Centerline, Sealable, Black, Wire & Cable, Power, DEUTSCH DRC



Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Not reviewed for solder process capability

Halogen Content

Solder Process Capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**




50 Position Housing, Housing for Female Terminals, Wire-to-Wire, 4.42 mm [.174 in] Centerline, Sealable, Black, Wire & Cable, Power, DEUTSCH DRC



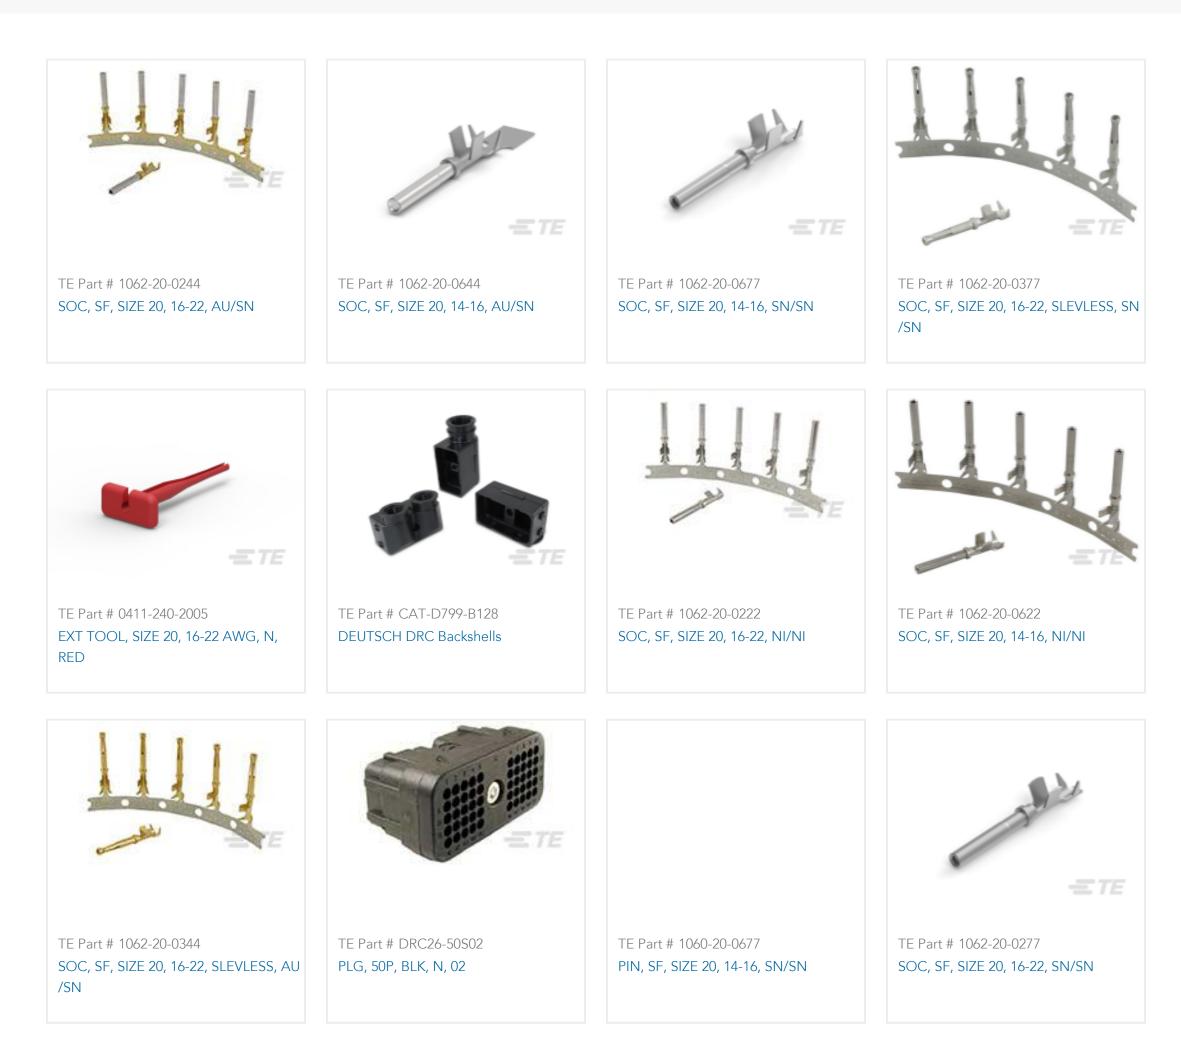



# Also in the Series | DEUTSCH DRC

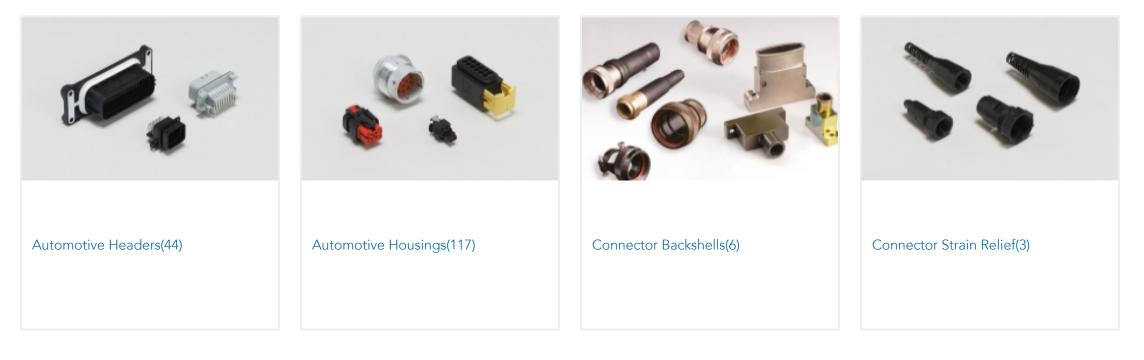

50 Position Housing, Housing for Female Terminals, Wire-to-Wire, 4.42 mm [.174 in] Centerline, Sealable, Black, Wire & Cable, Power, DEUTSCH DRC





# **Customers Also Bought**





## Documents

Product Drawings

PLG, 50P, BLK, N, 01

English

## CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_DRC26-50S01\_99\_c-drc26-50s01-99.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_DRC26-50S01\_99\_c-drc26-50s01-99.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_DRC26-50S01\_99\_c-drc26-50s01-99.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

50 Position Housing, Housing for Female Terminals, Wire-to-Wire, 4.42 mm [.174 in] Centerline, Sealable, Black, Wire & Cable, Power, DEUTSCH DRC



Datasheets & Catalog Pages TERMINALS AND CONNECTORS

English

ICT Terminals and Connectors Catalogue

English

Product Specifications

**Product Specification** 

English

Agency Approvals UL Report English