DEUTSCH | DEUTSCH DT, DEUTSCH DTHD

TE Internal #: DTHD04-1-4P 1 Position Housing, Housing for Male Terminals, Wire-to-Wire, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DTHD Housings



Number of Positions: 1

Connector & Housing Type: Housing for Male Terminals

Mating Pin Diameter: 5.72 mm [.225 in]

Connector System: Wire-to-Wire

Sealable: Yes

All DEUTSCH DTHD Housings (13)



Features

Product Ty	ype	Features
------------	-----	----------

Mixed & Hybrid Connector	No		
Connector Shape	Circular		
Connector & Housing Type	Housing for Male Terminals		
Connector System	Wire-to-Wire		
Sealable	Yes		
Primary Locking Feature	Integrated in Housing		
Connector & Contact Terminates To	Wire & Cable		
Configuration Features			
Number of Positions	1		
Number of Rows	1		
Electrical Characteristics			
Operating Voltage	250 VDC		

1 Position Housing, Housing for Male Terminals, Wire-to-Wire, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



Nominal Voltage Architecture	12 V, 24 V, 48 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Black
Contact Features	
Contact Size	Size 4
Contact Type	Pin
Mating Pin Diameter	5.72 mm[.225 in]
Contact Current Rating (Max)	100 A
Mechanical Attachment	
Strain Relief	With
Terminal Position Assurance	No
Mating Alignment Type	Polarization
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	

Housing Material

PEI (Polyetherimide)

Dimensions

Compatible Insulation Diameter Range	6.63 – 10.67 mm[.261 – .42 in]			
Product Width	26.54 mm[1.045 in]			
Product Length	52.53 mm[2.068 in]			
Connector Height	43.18 mm[1.7 in]			
Usage Conditions				
Operating Temperature (Max)	125 °C[257 °F]			
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]			
Operation/Application				
Circuit Application	Power			
Industry Standards				
IP Rating	Not Tested			
UL Flammability Rating	Not Tested			
Packaging Features				

1 Position Housing, Housing for Male Terminals, Wire-to-Wire, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



Packaging Quantity	500
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in

Halogen Content

Solder Process Capability

Component Part)

Article Safe Usage Statements:

Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


1 Position Housing, Housing for Male Terminals, Wire-to-Wire, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



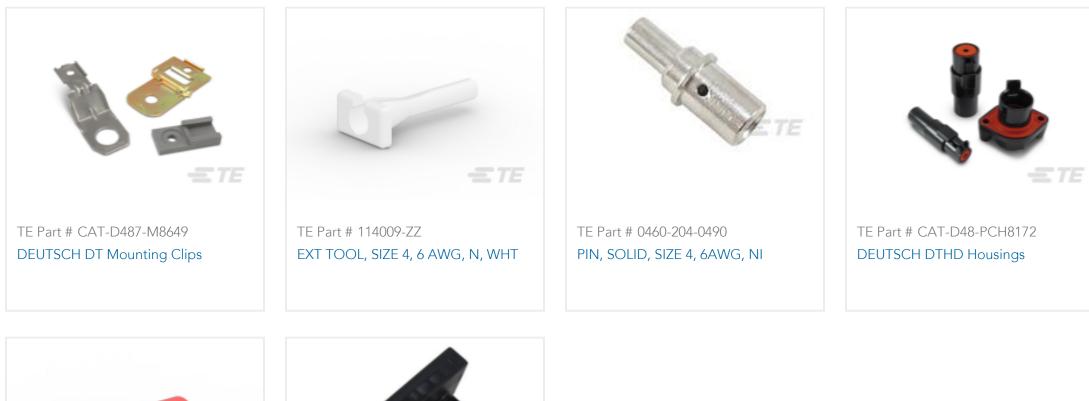




Also in the Series DEUTSCH DT

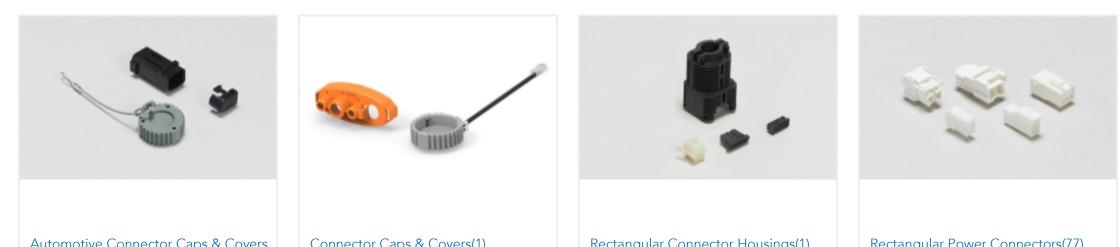


Automotive connector cups a covers		Rectangular connector riousings(r)	Rectangular rower connectors(///
(19)			

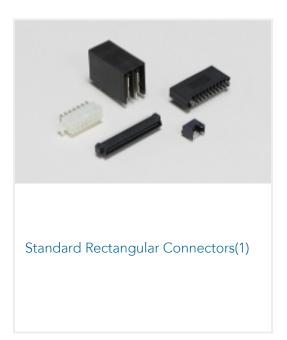


Also in the Series DEUTSCH DTHD

1 Position Housing, Housing for Male Terminals, Wire-to-Wire, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



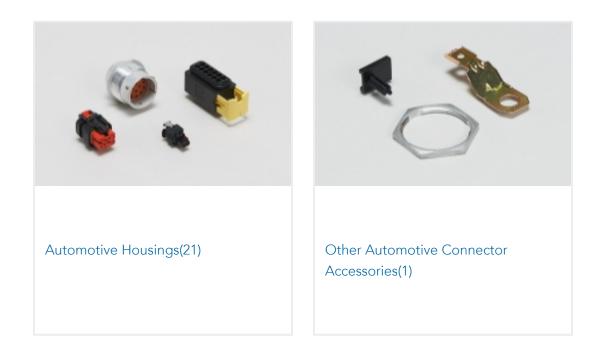

Customers Also Bought

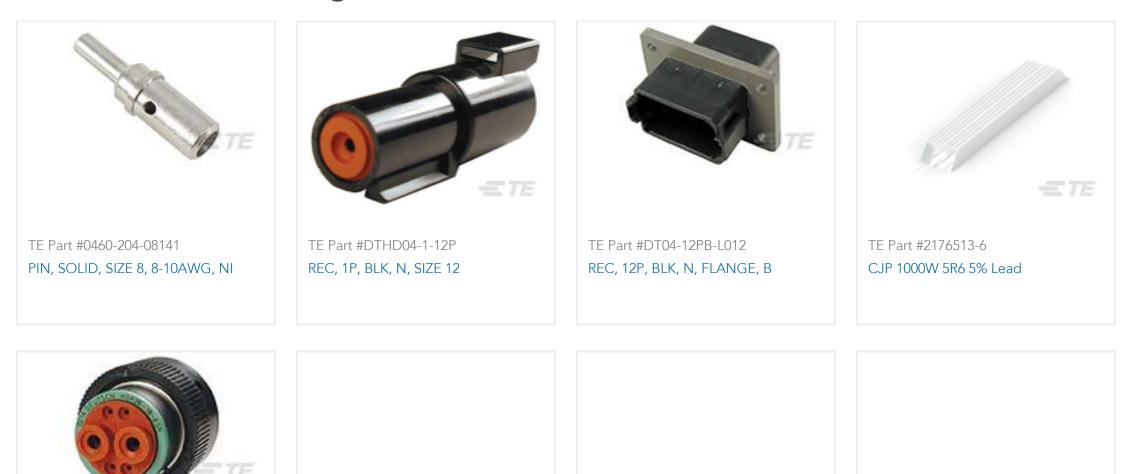

TE Part #HDP26-18-6SN

TE Part #WELDON-OKAO231100

TE Part #OK90-2056-00

TE Part #WELDON-MINI-16X0

PLG, 6P, BLK, N, 4/16, S	WELDON-OKAO-2311-00	WELDON DT 3 PIN KT	WELDON-MINI
TE Part #Y-0K90-3595-000000	TE Part #Y-0K90-3496-000000		
DT 8 CAV 4 KEYINGS W/ WDGE	DTM06-4S WITH CONTACT AND		
&CONT	WEDGE		

Documents

Product Drawings REC, 1P, BLK, N, SIZE 4

English

CAD Files

Customer View Model

ENG_CVM_CVM_DTHD04-1-4P_99.2d_dxf.zip

English

3D PDF

C For support call+1 800 522 6752

1 Position Housing, Housing for Male Terminals, Wire-to-Wire, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



3D

Customer View Model ENG_CVM_CVM_DTHD04-1-4P_99.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DTHD04-1-4P_99.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue English

CONNECTOR SELECTOR

English

Product Specifications Application Specification

English