## DTHD04-1-8P-E003 ✓ ACTIVE



### DEUTSCH | DEUTSCH DT, DEUTSCH DTHD

TE Internal #: DTHD04-1-8P-E003

1 Position Housing, Housing for Male Terminals, Wire-to-Wire,

Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging),

Hybrid

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DTHD Housings











Number of Positions: 1

Connector & Housing Type: Housing for Male Terminals

Mating Pin Diameter: 3.61 mm [ .142 in ]

Connector System: Wire-to-Wire

Sealable: Yes

All DEUTSCH DTHD Housings (13)

### **Features**

## **Product Type Features**

Connector ShapeCircularConnector & Housing TypeHousing for Male TerminalsConnector SystemWire-to-WireSealableYesPrimary Locking FeatureIntegrated in Housing	Mixed & Hybrid Connector	No
Connector System  Wire-to-Wire  Sealable  Yes	Connector Shape	Circular
Sealable Yes	Connector & Housing Type	Housing for Male Terminals
	Connector System	Wire-to-Wire
Primary Locking Feature Integrated in Housing	Sealable	Yes
	Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To Wire & Cable	Connector & Contact Terminates To	Wire & Cable

### **Configuration Features**

Connector Modification	End Cap
Number of Positions	1
Number of Rows	1

#### **Electrical Characteristics**



Operating Voltage	250 VDC
Nominal Voltage Architecture	12 V, 24 V, 48 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Black
Contact Features	
Contact Size	Size 8
Contact Type	Pin
Mating Pin Diameter	3.61 mm[.142 in]
Contact Current Rating (Max)	60 A
Mechanical Attachment	
Strain Relief	With
Terminal Position Assurance	No
Mating Alignment Type	Polarization
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PEI (Polyetherimide)
Dimensions	
Compatible Insulation Diameter Range	4.83 – 6.09 mm[.19 – .24 in]
Product Width	20.32 mm[.8 in]
Product Length	53.8 mm[2.118 in]
Connector Height	23.88 mm[.94 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
IP Rating	Not Tested
UL Flammability Rating	Not Tested
De also ation at Forettaine s	



Packaging Quantity	1000
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Dodecamethylcyclohexasiloxane (D6) (.5% in 26178080431) Decamethylcyclopentasiloxane (D5) (.5% in 26178080431) Octamethylcyclotetrasiloxane (D4) (.5% in 26178080431) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

1 Position Housing, Housing for Male Terminals, Wire-to-Wire, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid


















## Also in the Series | DEUTSCH DT











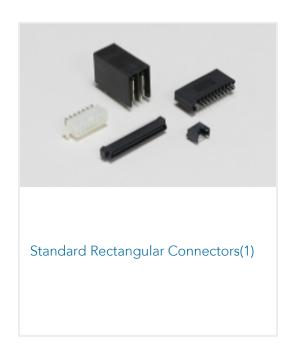

Also in the Series | DEUTSCH DTHD



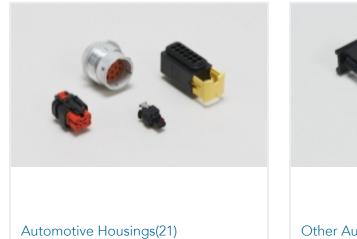

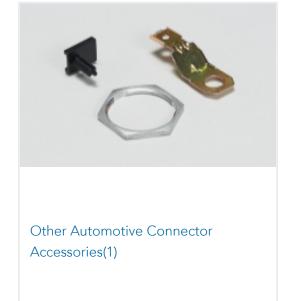


## Customers Also Bought








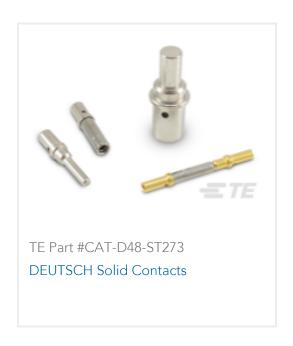







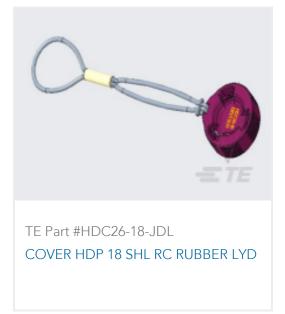

## **Documents**

**Product Drawings** 

REC, 1P, BLK, N, SIZE 8, CAP

English

## **CAD Files**

**Customer View Model** 

ENG\_CVM\_CVM\_DTHD04-1-8P-E003\_99.2d\_dxf.zip

English

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_DTHD04-1-8P-E003\_99.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_DTHD04-1-8P-E003\_99.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

1 Position Housing, Housing for Male Terminals, Wire-to-Wire, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



Datasheets & Catalog Pages

TERMINALS AND CONNECTORS

English

ICT Terminals and Connectors Catalogue

English

**CONNECTOR SELECTOR** 

English

**Product Specifications** 

**Application Specification** 

English