

DTM06-4S-E004

✓ ACTIVE

DEUTSCH | DEUTSCH DT, DEUTSCH DTM

TE Internal #: DTM06-4S-E004

4 Position Housing, Housing for Female Terminals, Wire-to-Wire, 4.19 mm [.165 in] Centerline, Sealable, Black, Wire & Cable, Power, Hybrid

[View on TE.com >](#)



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DTM Housings



Number of Positions: 4

Connector & Housing Type: **Housing for Female Terminals**

Mating Pin Diameter: 1.02 mm [.04 in]

Connector System: **Wire-to-Wire**

Centerline (Pitch): 4.19 mm [.165 in]

[All DEUTSCH DTM Housings \(113\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Blank Cavity Position	0
Number of Positions	4
Number of Rows	2

Electrical Characteristics

--	--



Operating Voltage	250 VDC
Nominal Voltage Architecture	12 V, 24 V, 48 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Black

Contact Features

Contact Size	Size 20
Contact Type	Socket
Mating Pin Diameter	1.02 mm[.04 in]
Contact Current Rating (Max)	7.5 A

Mechanical Attachment

Strain Relief	Without
Terminal Position Assurance	No
Mating Alignment Type	Polarization
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PA GF
Centerline (Pitch)	4.19 mm[.165 in]

Dimensions

Row-to-Row Spacing	4.19 mm[.165 in]
Compatible Insulation Diameter Range	1.3 – 3 mm[.053 – .12 in]
Product Width	17.6 mm[.693 in]
Product Length	15.2 mm[.598 in]
Connector Height	30.1 mm[1.18 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

IP Rating	IP68, IP6K9K
-----------	--------------



Compatible With Agency/Standards Products	SAE J2030
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	1
Packaging Method	Package

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Dodecamethylcyclohexasiloxane (D6) (.5% in 27519360991) Decamethylcyclopentasiloxane (D5) (.5% in 27519360991) Octamethylcyclotetrasiloxane (D4) (.5% in 27519360991) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability	Not reviewed for solder process capability
---------------------------	--

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts



TE Part # DTM4S-BT-BK
BOOT, 4P, PLG, ST, BLK



TE Part # WM-4S
WEDGE LOCK, 4P, PLG, ORG, DTM



TE Part # 1062-20-0122
SOC, SF, SIZE 20, 16-22, NI/NI



TE Part # CAT-D48-ST273
DEUTSCH Solid Contacts



TE Part # 1062-20-0144
SOC, SF, SIZE 20, 16-22, AU/SN



TE Part # CAT-D485-CH8172
DEUTSCH DTM Housings



TE Part # 1062-20-0244
SOC, SF, SIZE 20, 16-22, AU/SN



TE Part # 1062-20-0222
SOC, SF, SIZE 20, 16-22, NI/NI



TE Part # 1062-20-0622
SOC, SF, SIZE 20, 14-16, NI/NI



TE Part # 1062-20-0344
SOC, SF, SIZE 20, 16-22, SLEVLESS, AU /SN



TE Part # 1062-20-0277
SOC, SF, SIZE 20, 16-22, SN/SN



TE Part # 1062-20-0177
SOC, SF, SIZE 20, 16-22, SN/SN



TE Part # 1062-20-0322
SOC, SF, SIZE 20, 16-22, SLEVLESS, NI /NI



TE Part # CAT-D48-SP729
DEUTSCH Sealing Plugs



TE Part # DT-RT1
EXT TOOL, FRONT RELEASE



TE Part # DTM4S-BT
BOOT, 4P, PLG, ST, GRY



TE Part # 1062-20-0644
SOC, SF, SIZE 20, 14-16, AU/SN



TE Part # 1062-20-0677
SOC, SF, SIZE 20, 14-16, SN/SN



TE Part # CAT-D485-B128
Backshells, DEUTSCH DTM



TE Part # 1062-20-0377
SOC, SF, SIZE 20, 16-22, SLEVLESS, SN /SN




Also in the Series | **DEUTSCH DT**



Automotive Connector Caps & Covers
(7)



Connector Caps & Covers(1)

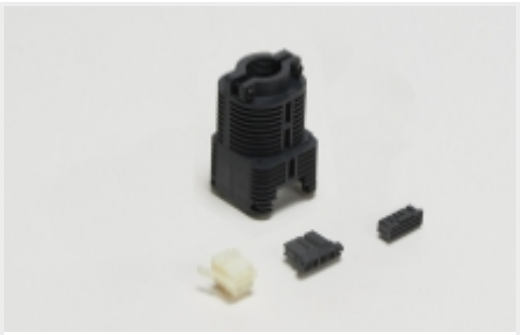

Rectangular Connector Housings(1)




Rectangular Power Connectors(77)



Standard Rectangular Connectors(1)

Also in the Series | **DEUTSCH DTM**

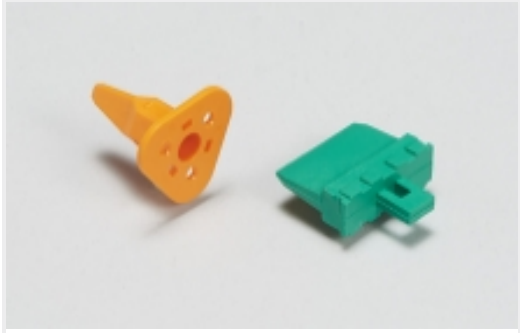

Automotive Connector Locks & Position Assurance(26)



Automotive Headers(38)




Automotive Housings(109)




Connector Seals & Cavity Plugs(1)



Connector Strain Relief(28)

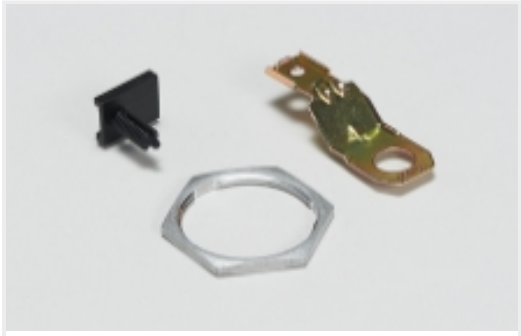


Other Automotive Connector Accessories(7)

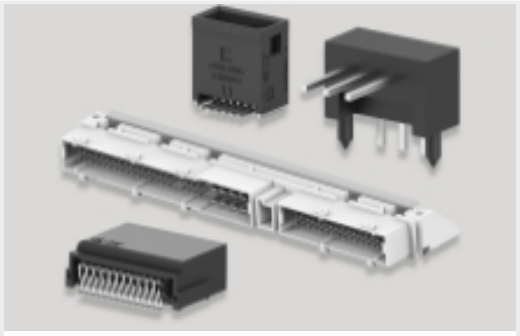

PCB Headers & Receptacles(38)



Rectangular Backshells & Clamps(1)

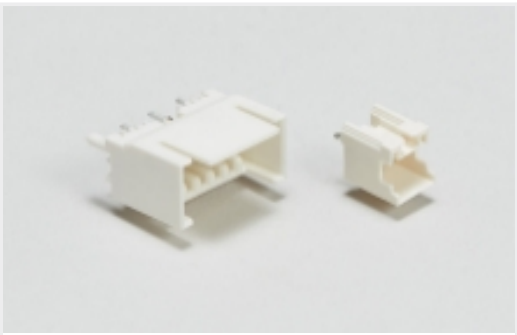

Wire-to-Board Headers & Receptacles
(38)

Customers Also Bought



TE Part #CAT-D485-B128
Backshells, DEUTSCH DTM



TE Part #2-2141520-1
5POS, MCON 1.2 LL TAB SEALED
COD B



TE Part #CAT-D485-CH8172
DEUTSCH DTM Housings



TE Part #DT04-12PD-CE07
REC, 12P, BRN, E, ENH KEY, CAP, D



TE Part #WM-4P
WEDGE LOCK, 4P, REC, ORG, DTM

Documents

Product Drawings

PLG, 4P, BLK, N

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_DTM06-4S-E004_99_c-dtm06-4s-e004-99.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_DTM06-4S-E004_99_c-dtm06-4s-e004-99.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DTM06-4S-E004_99_c-dtm06-4s-e004-99.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



Datasheets & Catalog Pages
ICT Terminals and Connectors Catalogue

English
CONNECTOR SELECTOR
English

Product Specifications
Application Specification

English

Agency Approvals
UL Report

English