DTP06-2S ✔ ACTIVE

DEUTSCH | **DEUTSCH DT**, **DEUTSCH DTP**

TE Internal #: DTP06-2S

2 Position Housing, Housing for Female Terminals, Wire-to-Wire, 6.7 mm [.264 in] Centerline, Sealable, Gray, Wire & Cable, Power, Hybrid

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DTP Housings

Number of Positions: 2

Connector & Housing Type: Housing for Female Terminals

Mating Pin Diameter: 2.39 mm [.094 in]

Connector System: Wire-to-Wire

Centerline (Pitch): 6.7 mm [.264 in]

All DEUTSCH DTP Housings (34)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Blank Cavity Position	0
Connector Seal Code	N Seal
Number of Positions	2
Number of Rows	1

DTP06-2S

2 Position Housing, Housing for Female Terminals, Wire-to-Wire, 6.7 mm [.264 in]
Centerline, Sealable, Gray, Wire & Cable, Power, Hybrid

Electrical Characteristics

Operating Voltage	200 VDC
Nominal Voltage Architecture	12 V, 24 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Gray

Contact Features

Contact Size	Size 12
Contact Type	Socket
Mating Pin Diameter	2.39 mm[.094 in]
Contact Current Rating (Max)	25 A

Mechanical Attachment

Strain Relief	Without
Terminal Position Assurance	No
Mating Alignment Type	Polarization
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PA GF
Centerline (Pitch)	6.7 mm[.264 in]

Dimensions

Compatible Insulation Diameter Range	3.4 – 4.9 mm[.134 – 1.95 in]
Product Width	18.6 mm[.732 in]
Product Length	18.6 mm[.732 in]
Connector Height	34.6 mm[1.36 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Operation/Application

Circuit Application	Power

Industry Standards

IP Rating	IP68, IP6K9K

DTP06-2S

2 Position Housing, Housing for Female Terminals, Wire-to-Wire, 6.7 mm [.264 in]
Centerline, Sealable, Gray, Wire & Cable, Power, Hybrid

Compatible With Agency/Standards Products	SAE J2030
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	1
Packaging Method	Package

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

2 Position Housing, Housing for Female Terminals, Wire-to-Wire, 6.7 mm [.264 in]
Centerline, Sealable, Gray, Wire & Cable, Power, Hybrid

TE Part # 1062-12-0144
SOC, SF, SIZE 12, 12-14, AU/SN

TE Part # 1062-12-0244
SOC, SF, SIZE 12, 10, AU/SN

TE Part # 1062-12-0222
SOC, SF, SIZE 12, 10, NI/NI

TE Part # CAT-D486-CH8172
DEUTSCH DTP Housings

TE Part # 1062-12-0166
SOC, SF, SIZE 12, 12-14, NI/SN

TE Part # CAT-D48-SP729
DEUTSCH Sealing Plugs

TE Part # DT-RT1
EXT TOOL, FRONT RELEASE

TE Part # DTP2S-BT
BOOT, 2P, PLG, ST, GRY

TE Part # WP-2S
WEDGE LOCK, 2P, PLG, ORG, DTP

TE Part # CAT-D48-ST273
DEUTSCH Solid Contacts

Also in the Series | DEUTSCH DT

Automotive Connector Locks &
Position Assurance(4)

Automotive Housings(34)

Connector Caps & Covers(1)

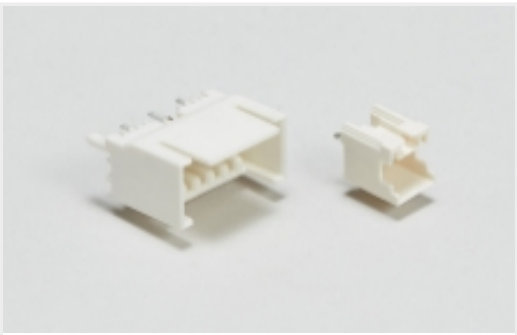Connector Seals & Cavity Plugs(2)

Connector Strain Relief(31)

Other Automotive Connector
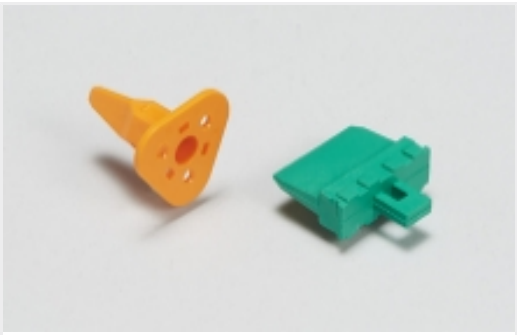Accessories(4)

PCB Headers & Receptacles(5)

Rectangular Backshells & Clamps(3)

2 Position Housing, Housing for Female Terminals, Wire-to-Wire, 6.7 mm [.264 in]
Centerline, Sealable, Gray, Wire & Cable, Power, Hybrid

Wire-to-Board Headers & Receptacles
(5)

Also in the Series | DEUTSCH DTP

Automotive Connector Locks &
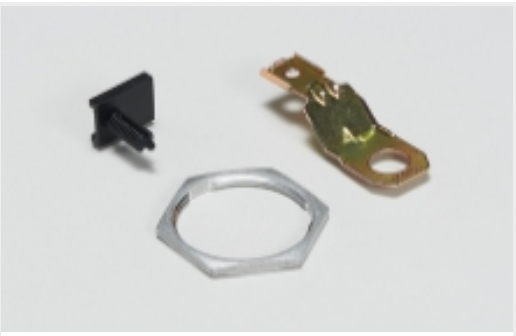Position Assurance(4)
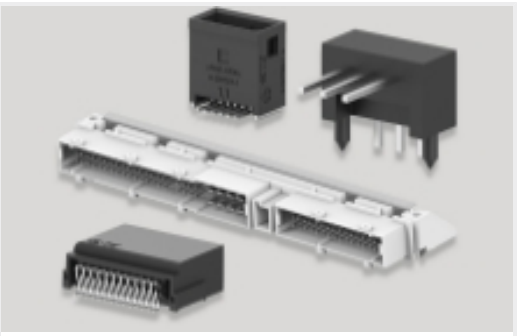
Automotive Headers(5)

Automotive Housings(34)

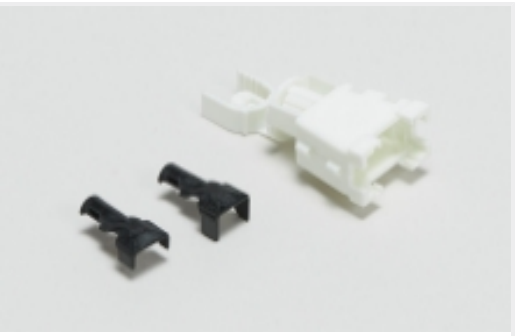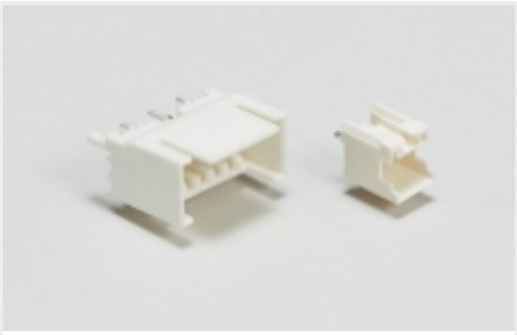Connector Seals & Cavity Plugs(2)

Insertion & Extraction Tools(3)

Other Automotive Connector
Accessories(4)

PCB Headers & Receptacles(5)

Rectangular Backshells & Clamps(3)

Wire-to-Board Headers & Receptacles
(5)

Customers Also Bought

2 Position Housing, Housing for Female Terminals, Wire-to-Wire, 6.7 mm [.264 in] Centerline, Sealable, Gray, Wire & Cable, Power, Hybrid

TE Part #WP-4S
WEDGE LOCK, 4P, PLG, ORG, DTP

TE Part #CAT-D487-W416
Wedgelocks: DEUTSCH DT

TE Part #CAT-J41-DDRC
DEUTSCH DT Receptacle Connectors

TE Part #CAT-J41-DDPC
DEUTSCH DT Plug Connectors

TE Part #1060-12-0166
PIN, SF, SIZE 12, 12-14, NI/SN

TE Part #1062-12-0222
SOC, SF, SIZE 12, 10, NI/NI

Documents

Product Drawings
PLG, 2P, GRY, N

English

CAD Files
3D PDF

3D

Customer View Model

ENG_CVM_CVM_DTP06-2S_99_c-dtp06-2s-99.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_DTP06-2S_99_c-dtp06-2s-99.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DTP06-2S_99_c-dtp06-2s-99.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages
ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications
Engineering Report

English

DTP06-2S

2 Position Housing, Housing for Female Terminals, Wire-to-Wire, 6.7 mm [.264 in]
Centerline, Sealable, Gray, Wire & Cable, Power, Hybrid

Agency Approvals

UL Report

English