




Heat Shrink Tubing > VERSAFLEX Heat Shrink Tubing

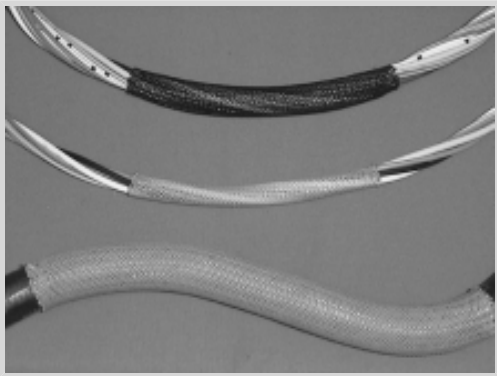

Wall Type: **Braid Wall**
Primary Product Material: **Polyester**
Tubing Flammability Type: **Non-Flame-Retardant**
Packaging Method: **Box**
Operating Temperature Range: **-50 – 150 °C**

[All VERSAFLEX Heat Shrink Tubing \(39\)](#)

Features

Product Type Features

Wall Type	Braid Wall
-----------	------------

Body Features

Primary Product Material	Polyester
Flexibility	Flexible

Dimensions

Tubing Size Range	13. – 32. mm[.512 – 1.26 in]
-------------------	------------------------------

Usage Conditions

Resistance Properties	Moisture
Tubing Flammability Type	Non-Flame-Retardant
Operating Temperature Range	-50 – 150 °C

Operation/Application

Mechanical Resistance	Mechanical Damage
-----------------------	-------------------

Product Availability

Applicable Region	Global
-------------------	--------

Packaging Features

Packaging Method	Box
------------------	-----



Other

Meets Low Outgassing Requirements	No
Product Source	Europe

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # EG1114-000
[CV1981-ST-230V1600W-EU](#)



Also in the Series | RAYCHEM VERSAFLEX-FR

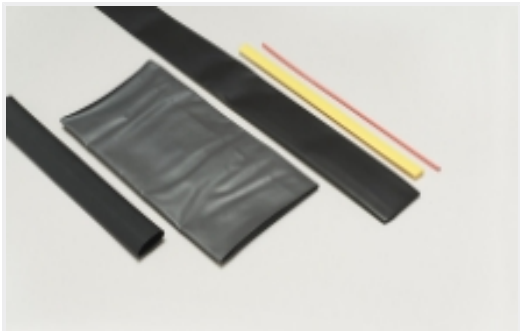

Heat Shrink Tubing(7)


Customers Also Bought



TE Part #1-456134-4
CRIMPER, INSULATION "F"(.140")




TE Part #324056
TERMINAL,T-N R 1/0 1/4

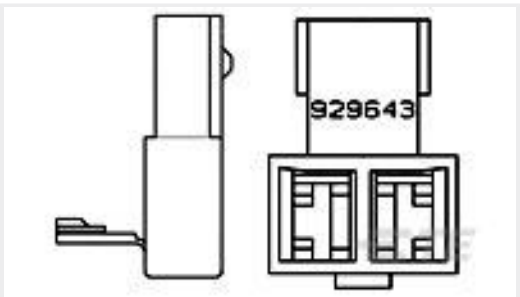


TE Part #929643-1
2P KUPPLUNGSGEH



TE Part #3-640429-7
07P MTA156 CONN ASSY 24AWG WHT

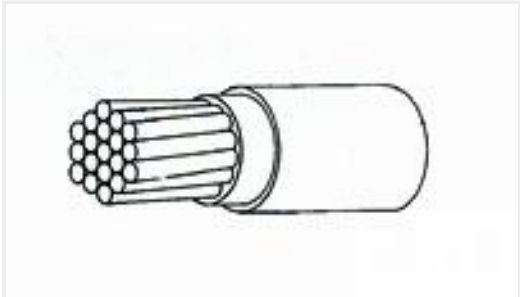


TE Part #218033-007
55A0811-16-9

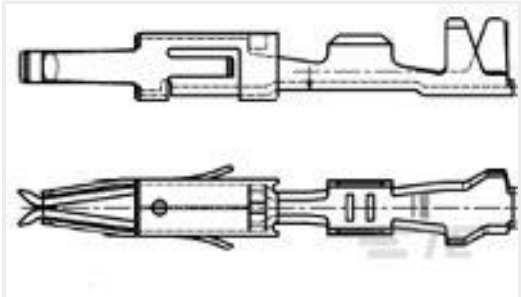

TE Part #962876-5
MT2 REC 1.6 Contact SWS Au




TE Part #520971-4
ULTRA-POD 250 ASY REC 18-14 AWG TPBR

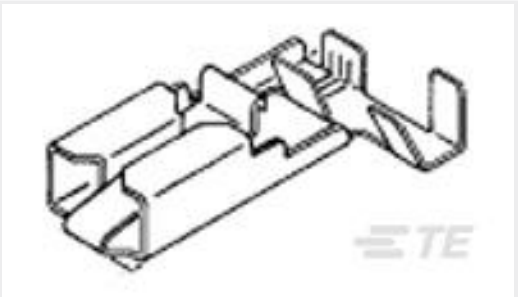

TE Part #926820-6
PL 250 FLAG REC 0.5-1.5 MM2 0.4X.44



TE Part #1203559-3
EXTERNAL RELAY BASE(FR)

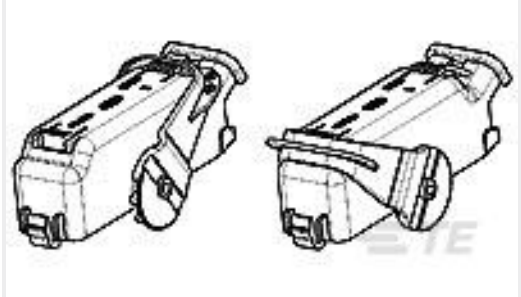

TE Part #1379209-2
26W COVER ASSEMBLY

Documents

Product Drawings

VERSAFLEX-FR-3/4-09-SP

English

Datasheets & Catalog Pages

Versaflex and Versaflex-FR

English

E865454001

Braid Wall, Polyester, Non-Flame-Retardant, Box, -50 – 150 °C, Mechanical Damage, Flexible, Global, RAYCHEM VERSAFLEX-FR



Product Specifications

Application Specification

English