F90657-000 ~ ACTIVE


RAYCHEM | RAYCHEM GelWrap

TE Internal #: F90657-000 Splice Closure, ≤ 1 kV, 4 – 95 mm² Conductor, 1 Main Wires (Max), Snap Closure, RAYCHEM GelWrap

View on TE.com >



Energy & Power > Power Cable Accessories > Joints & Splices

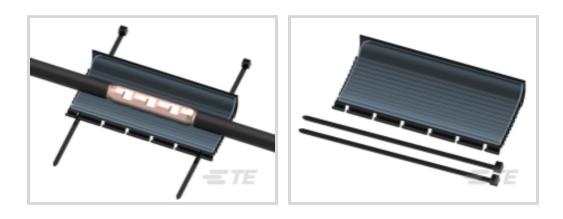

Installation Technology: Power Gel

Product Availability: Europe, Middle East & Africa

Joints & Splice Product Type: Splice Closure

Voltage Class: ≤ 1 kV

Compatible Conductor Cross-Section Range: 4–95 mm²

Features

Product Type Features

Case Seal	Gel
Cable Sealing Method	Gel
Adhesive Coating	With

Filler	PowerGel
Installation Technology	Power Gel
Joints & Splice Product Type	Splice Closure
Closing Method	Snap
Configuration Features	
Number of Main Wires (Max)	1
Electrical Characteristics	
Voltage Class	$\leq 1 \text{ kV}$
Body Features	
Primary Product Color	Black
Flexibility	Semi-Flexible
Mechanical Attachment	
Mechanical Reinforcement	Cable Ties
Strain Relief	Without

F90657-000

Splice Closure, ≤ 1 kV, 4 – 95 mm² Conductor, 1 Main Wires (Max), Snap Closure, RAYCHEM GelWrap



Dimensions

Compatible Cable Diameter - Main (Min)	4 mm
Compatible Conductor Cross-Section Range	4 – 95 mm²
Compatible Insulation Diameter Range	4 – 18 mm[.7 – .15 in]
Compatible Cable Cross-Section - Main (Max)	95 mm ²
Compatible Cable Cross-Section - Main (Min)	4 mm ²
Compatible Cable Diameter - Main (Max)	18 mm
Compatible Conductor Diameter Range	.15 – .7 mm[4 – 18 in]
Jsage Conditions	
Operating Temperature Range	-40 – 95 °C
Fluid Resistance Type	Humic Acids, Hydrochloric Acid, Motor Oil, Sodium Chloride, Sodium Hydroxide, Wate
Environmental Resistance	Moisture, Protection Against Humidity, Rain, Self Sealing, Water Repelant, Weathering
Operation/Application	
Mechanical Resistance	Against Mechanical Impact
UV-Stabilized	Yes
Marine-Offshore-Shipbuilding Certified	No
ndustry Standards	
Compatible With Approved Standards Products	ANSI C119.1, EN 50393
Product Availability	
Product Availability	Europe, Middle East & Africa
Packaging Features	
Packaging Method	Bag
Packaging Quantity	1
Other	
Product Use	Outdoor, Overhead & Direct Buried
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

F90657-000

Splice Closure, ≤ 1 kV, 4 – 95 mm² Conductor, 1 Main Wires (Max), Snap Closure, RAYCHEM GelWrap



China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | RAYCHEM GelWrap

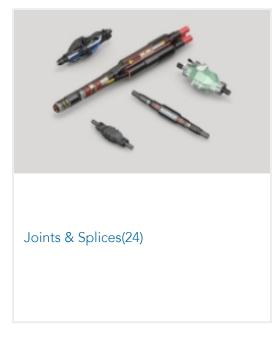


Customers Also Bought

F90657-000

Splice Closure, ≤ 1 kV, 4 – 95 mm² Conductor, 1 Main Wires (Max), Snap Closure, RAYCHEM GelWrap



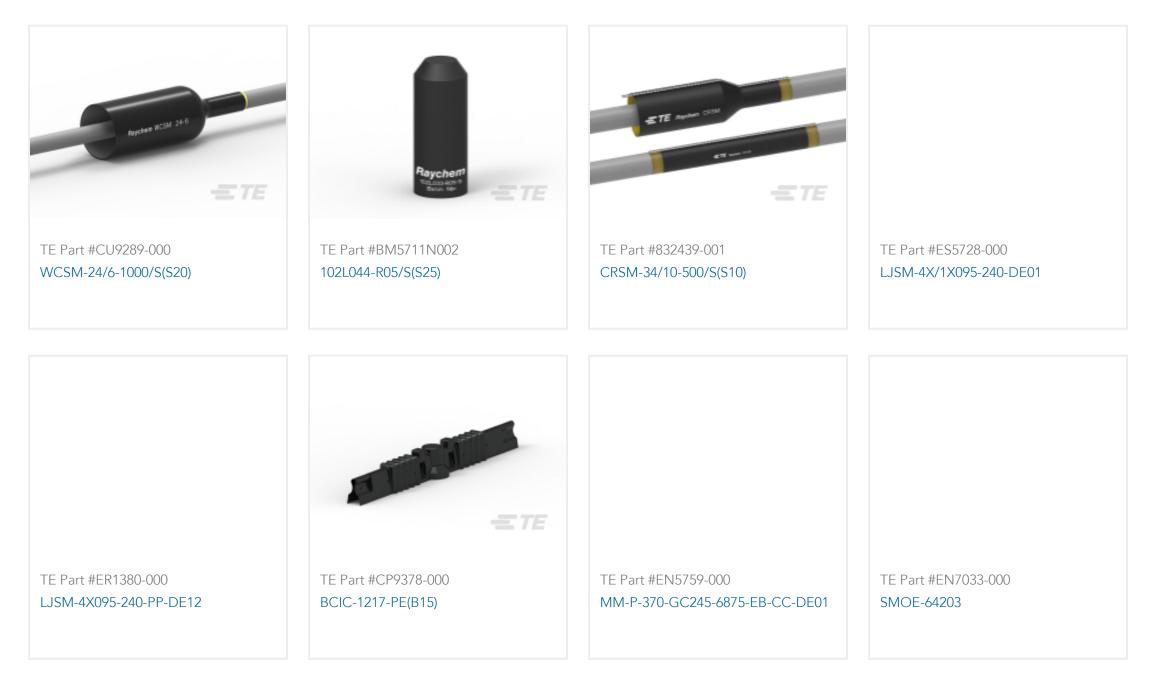



Documents

Product Drawings GELWRAP-18/4-150(B6)

English

Datasheets & Catalog Pages GELWRAP-WRAPAROUND-SLEEVE-CABLE-ACCESSORIES

English

Agency Approvals UL Report

English