

MEAS | BETACURVE TE Internal #: GA10K3A1A TE Internal Description: DISCRETE 10K OHMS,+/-0.1C FROM 0C TO 70C Standard Epoxy NTC Thermistors View on TE.com >



Sensors > Temperature Sensors > NTC Sensors > NTC Thermistors > Standard Epoxy NTC Thermistors



NTC Sensor Type: Epoxy Coated NTC Thermistor

Lead Wire Length: 76 mm [2.992 in]

Resistance (at 25°C): 10 kΩ

Resistance Tolerance (at 25°C): ±.25 %

β-Value(25/85): **3976 K**

All Standard Epoxy NTC Thermistors (59)

Features

Product Type Features

β-Value (0/50)

3892 K

Temperature Tolerance	± 0.1 °C from 0 – 70 °C	
NTC Sensor Type	Epoxy Coated NTC Thermistor	
Resistance Tolerance (at 25°C)	± .25 %	
Tolerance β -Value	±.5 %	
Electrical Characteristics		
β-Value(25/85)	3976 K	
Body Features		
Lead Wire Conductor Type	Tinned Copper Alloy Solid	
Dimensions		
Lead Wire Size	32 AWG	
Product Diameter	2.4 mm[.094 in]	
Lead Wire Length	76 mm[2.992 in]	
Usage Conditions		
Resistance (at 25°C)	10 kΩ	

DISCRETE 10K OHMS,+/-0.1C FROM 0C TO 70C



Operating Temperature Range

Operating Temperature (Max)

-40 – 125 °C[-40 – 257 °F]

125 °C[257 °F]

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | BETACURVE

C For support call+1 800 522 6752


GA10K3A1A

DISCRETE 10K OHMS,+/-0.1C FROM 0C TO 70C



NTC Thermistors(60)

Customers Also Bought

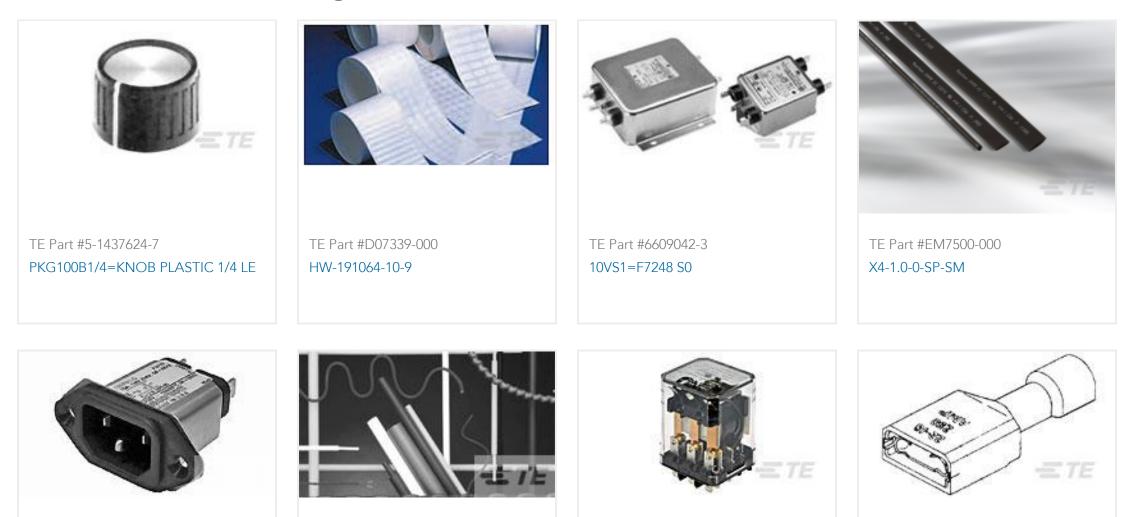

TE Part #6609987-6

TE Part #5069744004

TE Part #6-1393116-2

TE Part #9-520193-2

15SRB1-X=F8219E	CGPT-12.7/6.4-X-SP	KUMP-11A18-120=KU	ULTRA-FAST 187 ASY REC 22-18 AWG TPBR
TE TE			
TE Part #080-0001 CABLE,U.FL to SMA Bulkhd 1.13mm Dia,105m	TE Part #GALB10KF3976F RSEN-LEAD FRAME		

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_GA10K3A1A_12.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_GA10K3A1A_12.3d_igs.zip

GA10K3A1A

DISCRETE 10K OHMS,+/-0.1C FROM 0C TO 70C



English

Customer View Model ENG_CVM_CVM_GA10K3A1A_12.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Series_I_Thermistor_10K3A1

English

GA10K3A1 SERIES I THERMISTORS

English

CAT-NTC0001 Epoxy coated NTC Thermistors

English