HD36-24-31ST-059 <

DEUTSCH | DEUTSCH HD30, DEUTSCH HD

TE Internal #: HD36-24-31ST-059 31 Position Housing, Housing for Female Terminals, Wire-to-Wire, Sealable, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH HD30 Housings



Number of Positions: **31**

Connector & Housing Type: Housing for Female Terminals

Mating Pin Diameter: 1.6 mm [.063 in]

Connector System: Wire-to-Wire

Sealable: Yes

All DEUTSCH HD30 Housings (358)

Features

Product Type Features

Mixed & Hybrid Connector

Connector Shape	Circular			
Connector & Housing Type	Housing for Female Terminals			
Connector System	Wire-to-Wire			
Sealable	Yes			
Primary Locking Feature	Contact Retainer			
Connector & Contact Terminates To	Wire & Cable			
Configuration Features				
Blank Cavity Position	0			
Connector Modification	Cable Clamp			
Connector Seal Code	T Seal			
Number of Positions	31			
Electrical Characteristics				
Operating Voltage	250 VDC			
Nominal Voltage Architecture	12 V, 24 V			
Body Features				

31 Position Housing, Housing for Female Terminals, Wire-to-Wire, Sealable, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



Cable Exit Angle	180°
Contact Features	
Contact Size	Size 16
Contact Type	Socket
Mating Pin Diameter	1.6 mm[.063 in]
Contact Current Rating (Max)	13 A
Mechanical Attachment	
Strain Relief	With
Terminal Position Assurance	No
Mating Alignment Type	Guide Slot
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	Aluminum Alloy
Dimensions	
Compatible Insulation Diameter Range	1.4 – 3.8 mm[.055 – .15 in]
Product Width	49.3 mm[1.94 in]
Product Length	49.3 mm[1.94 in]
Connector Height	81 mm[3.19 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
IP Rating	IP67
Packaging Features	
Packaging Quantity	1
Packaging Method	Package
Other	
Serviceable	Yes

31 Position Housing, Housing for Female Terminals, Wire-to-Wire, Sealable, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



Connector Position Assurance Capable

No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Dodecamethylcyclohexasiloxane (D6) (.5% in 27519579026) Decamethylcyclopentasiloxane (D5) (.5% in 27519579026) Octamethylcyclotetrasiloxane (D4) (.5% in 27519579026) Mice Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not reviewed for solder process capability	

Solder Process Capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts

31 Position Housing, Housing for Female Terminals, Wire-to-Wire, Sealable, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid






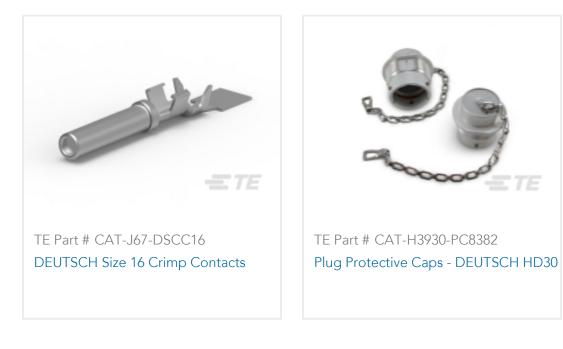

Also in the Series DEUTSCH HD30




Automotive Connector Caps & Covers	Automotive housings(700)	Connecto
(26)		

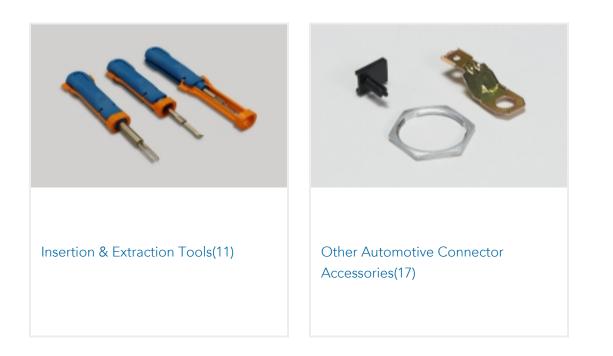

Also in the Series DEUTSCH HD

31 Position Housing, Housing for Female Terminals, Wire-to-Wire, Sealable, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



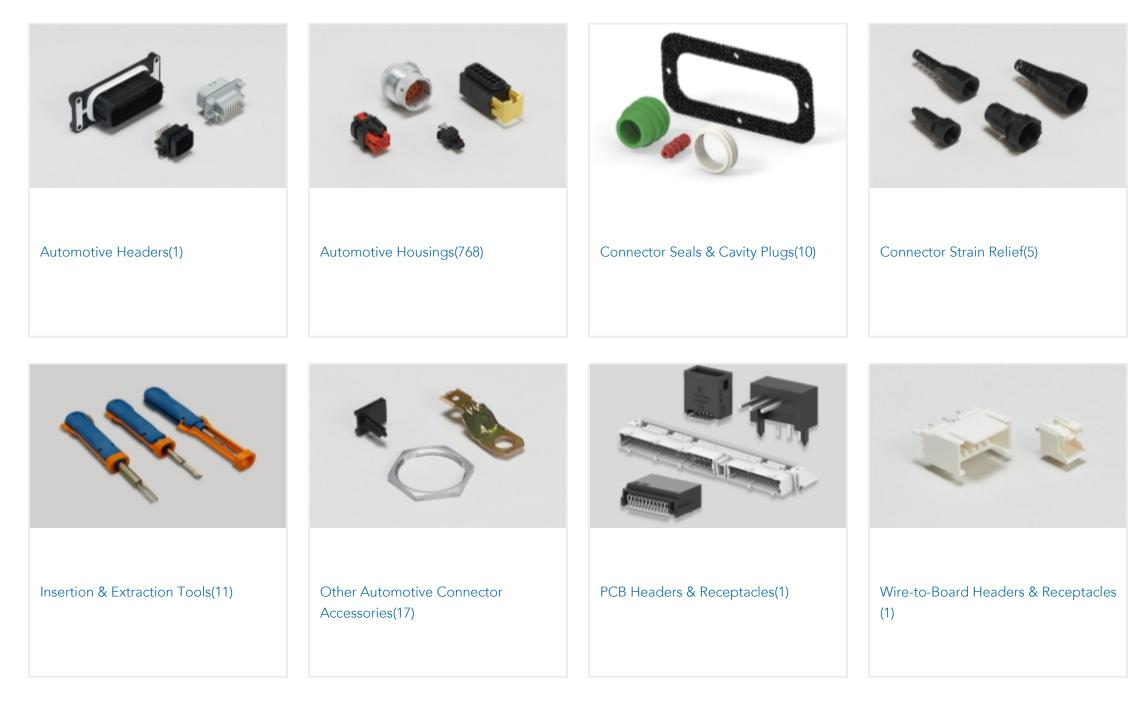

Customers Also Bought



DEUTSCH HD30 Housings	REC, 40P, BLK, E, XCAP, B	PRD-5AY0-24=PRD	J-P-T 3P ASSY FOR KNOCK SENSOR
TE Part #644753-5 05P MTA156 HDR ASSY RN STR F/L	TE Part #10100945-KIT 10100945-KT		

Documents

Product Drawings PLG,31P,AL,T, CBL CLMP BT, DRAIN,16,S,MC

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_HD36-24-31ST-059_B.2d_dxf.zip

31 Position Housing, Housing for Female Terminals, Wire-to-Wire, Sealable, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



English

Customer View Model ENG_CVM_CVM_HD36-24-31ST-059_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_HD36-24-31ST-059_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages DEUTSCH HD30 & HDP20 CONNECTOR SERIES

English

CONNECTOR SELECTOR

English

Product Specifications Application Specification

English