



Sensors > Humidity Sensors > Humidity Sensor Assemblies > Humidity Temperature Transducer



Operating Temperature Range: -40 – 85 °C [-40 – 185 °F]

Humidity Sensor Product Type: RHT Module

Supply Voltage (Peak): 12 VDC

Accuracy: ±3 %RH

Nominal Output @55%RH (at 5 VDC): 2.48 V

[All Humidity Temperature Transducer \(0\)](#)

Features

Product Type Features

Humidity Sensor Product Type	RHT Module
Interface Signal Type	Analog

Electrical Characteristics

Supply Voltage (Peak)	12 VDC
Nominal Output @55%RH (at 5 VDC)	2.48 V
Current Consumption	1 mA
Output Impedance	70 Ω

Usage Conditions

Humidity Operating Range	0 – 100 %RH
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Accuracy	±3 %RH
Sensitivity	26 mV/%RH

Other

Response Time	10 seconds
---------------	------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUL 2021 (219) SVHC > Threshold: 4,4'-isopropylidenediphenol (Bisphenol A) (1% in Component) Dodecamethylcyclhexasiloxane (D6) (.5% in Component) Formamide (.2% in Component) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # HPP809A031
RH/T HTM2500LF TRANSDUCER




TE Part # HPP801A031
HS1101LF HUMIDITY SENSOR




TE Part # HPP805A031
HM1500LF HUMIDITY MODULE

Also in the Series |


Customers Also Bought

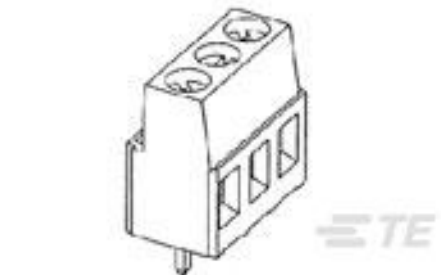

TE Part #282843-3
TERMI-BLOK PCB MOUNT 90 3P.1

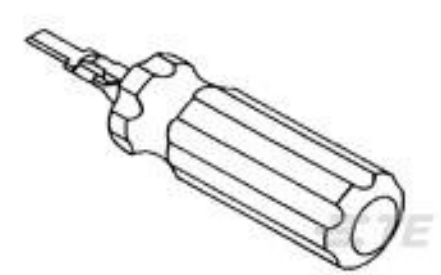

TE Part #1102855-3
AWZG-HVT-RSZ



TE Part #069402-000
562A043-25/86-0



TE Part #3-643821-6
06P MTA156 CONN ASSY 26AWG LF



TE Part #4-87499-2
22 MODIV HSG COMP SR .100CL




TE Part #2-5499206-1
A/L UNIV HDR 10P VERT LAT B



TE Part #525651
DAHT POSITIVE LOCK 18-11 ASSY

TE Part #YD8170E61-0SNC1270
RECP ASSY

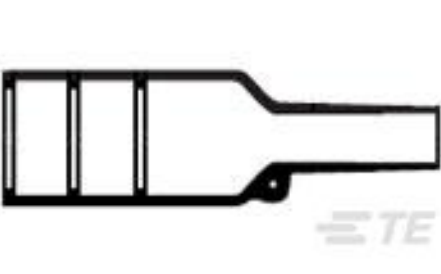

TE Part #927717-000
202K153-25-01/86-0

TE Part #650075N002
D-436-37CS2908

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_HPP809A033_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_HPP809A033_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_HPP809A033_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

HTM2500LF-HUMIDITY

English